



# SITE ACCESS GUIDE FOR CONTRACTORS



### SAFESMART UK

SafeSmart Access is a designer and manufacturer of height access equipment, edge protection and scaffolding.

An increase in site efficiency and safety whilst working at height is at the core of the company's purpose.



## SAFESMART ACCESS GLOBAL

Across all industries, we work closely with clients to design and manufacture custom-built steps, stairs, work platforms and any products that help to increase safety and efficiency on site.

SafeSmart and our specialist divisions, SafeSmart Aviation and Proscaf have branches in Australia, New Zealand, UK, Europe, Canada and USA. We understand the regulatory requirements for safety compliance in each region and we design our products around those requirements.

#### HISTORY

Since 2007, SafeSmart Access has provided products and completed access projects in a range of industries such as:

- O Construction
- O Mining
- Warehousing & Distribution
- O Oil, gas & Resources
- O Utilities
- O RetailO Defence

O Infrastructure

- O Aviation
- O Marine

## **GLOBAL REACH**



#### CORE CONSTRUCTION SOLUTIONS

AdjustaStairs Super Maintenance Platform Cantilevers Superchariot Pedestrian Bridge Modular Stepover Platform Ladders Insta-Deck	6 - 7 8 - 9 10 - 11 12 13 14 - 15 16 - 18 19
EDGE PROTECTION Adaptapanel Non-Drill Edge Protection	22 - 23 24 - 25
<b>TRUCK ACCESS</b> Safeloader Truck Access AdjustaStairs Truck Edge Protection Panel TruckSafe Podium	28 - 29 30 31 32
MODULAR BRIDGES Adaptaspan Crane Bridge Attachments Accessories	36 37 38
SCAFFOLDING AND TUBULAR PODIUMS Proscaf Construction Stair Towers Proscaf Clear Scan / Bridging Aluminium Scaffold Towers Towers Podiums	42 43 44 - 45 46 47
HEIGHT ADJUSTABLE PLATFORMS EasyRaise Platform UltraRaise	50 - 51 52 - 53
HUSHTEC SOUND CONTROL HushTec Rock Breaker Shroud Hushtec Box Hushtec Acoustic Tent Hushtec Noise Reduction Panels	56 57 57 58



# CORE CONSTRUCTION SOLUTIONS



# ADJUSTASTAIRS



# SELF LEVELLING ALUMINIUM STAIRS 600MM WIDE

Code	Туре	Lying Length	Height Adjustments at Stair Incliment	Weight (Kg)	SWL (Kg)
210290	3 Step	0.8m	0.4 - 0.7m	20	500KG
210291	6 Step	1.8m	0.9 - 1.4m	38	500KG
210292	9 Step	2.7m	1.4 - 2.0m	55	500KG
210293	12 Step	3.7m	1.8 - 2.7m	73	500KG
210295	15 Step	4.8m	2.2 - 3.4m	93	500KG
210296	18 Step	5.4m	2.7 - 4.1m	108	500KG

## 1200MM WIDE (2-WAY ACCESS)


Code	Туре	Lying Length	Height Adjustments at Stair Incliment	Weight (Kg)	SWL (Kg)
210821	3 Step	0.8m	0.4 - 0.7m	38	500KG
210822	6 Step	1.8m	0.9 - 1.4m	59	500KG
210823	9 Step	2.7m	1.4 - 2.0m	84	500KG
210824	12 Step	3.7m	1.8 - 2.7m	108	500KG
210825	15 Step	4.8m	2.2 - 3.4m	153	500KG
210826	18 Step	5.4m	2.7 - 4.1m	168	500KG

#### FEATURES & BENEFITS

- O Adjustable aluminium safety stair
- O Treads self level within a height range
- O Safe, fast, easy access between floors, decks & into trenches
- O Handrails fold flat for easy storage, and no lost parts
- O Durable built to last
- O Modular mid-landings available



# ADJUSTASTAIRS

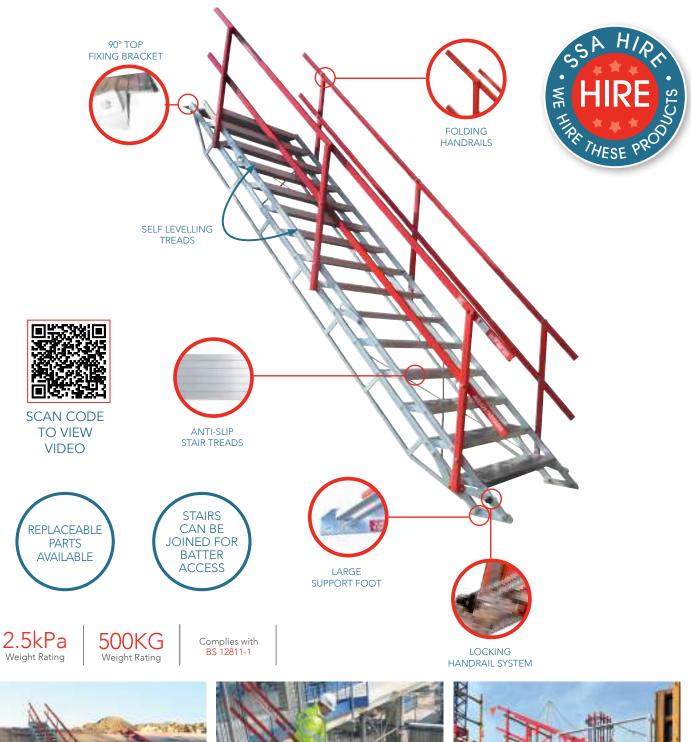



www.safesmartaccess.co.uk | sales@safesmartaccess.co.uk

## SUPER MAINTENANCE PLATFORM



#### SUPER MAINTENANCE PLATFORM - ALUMINIUM

Code	Platform Height	Platform Size	Туре
210183	565mm	800 x 800mm	2 Step
210184	850mm	800 x 800mm	3 Step
210185	1130mm	800 x 800mm	4 Step
210186	1400mm	800 x 800mm	5 Step
210187	1700mm	800 x 800mm	6 Step
210188	1970mm	1000 x 1000mm	7 Step*
210189	2250mm	1000 x 1000mm	8 Step*
210190	2540mm	1000 x 1000mm	9 Step*
210191	2828mm	1000 x 1000mm	10 Step*
210192	3100mm	1000 x 1000mm	11 Step*

\* Comes with out-riggers as standard

#### **FEATURES & BENEFITS**

- O Built tough with 82 x 50mm marine grade aluminium
- O Perforated & swaged deck for superior traction in wet & greasy conditions
- O Larger podiums suitable for 2 operatives






225KG Weight Rating



SCAN CODE TO VIEW VIDEO





# REAR SAFETY BAR LOCKING SAFETY GATE SOLID NON-SLIP TREAD PERFORATED ANTI SLIP PLATFORM ERGONOMIC LIFTING HANDLES ANTI PUNCTURE ANTI-SLIP FOAM FILLED WHEELS **RUBBER FOOT**

#### NEED SIDE ACCESS? CUSTOM OPTIONS AVAILABLE

www.safesmartaccess.co.uk | sales@safesmartaccess.co.uk

Swing Gate

## CANTILEVERS



#### CANTILEVER MAINTENANCE PLATFORM

Code	Platform Height	Description	Туре
210756	565mm	HD with Castors	2 Step
210757	850mm	HD with Castors	3 Step
210758	1130mm	HD with Castors	4 Step
210759	1400mm	HD with Castors	5 Step
210778	1700mm	HD with Castors	6 Step
210761	1970mm	HD with Castors	7 Step
210762	2250mm	HD with Castors	8 Step
210763	2540mm	HD with Castors	9 Step
210764	2828mm	HD with Castors	10 Step
210765	3100mm	HD with Castors	11 Step

- O An essential tool for all machinery service workshops
- O Allows you to get right into and up against your work area without reaching out from the platform
- O Built tough, non-slip perforated deck and aluminium frame







SCAN CODE TO VIEW VIDEO



# CANTILEVERS



## SUPERCHARIOT PLATFORM

Code	<b>Platform Height</b>	Туре
210450	565mm	2 Step
210451	850mm	3 Step
210452	1130mm	4 Step
210453	1400mm	5 Step
210454	1700mm	6 Step
210455	1975mm	7 Step
210456	2250mm	8 Step

- O Full surround handrails
- O Heavy duty design for construction work


I Tunin

- O 200kg weight rating
- O Step through access

200KG Weight Rating

> ANTI-SLIP DECK









HEAVY DUTY WHEELS

## ALUMINIUM TRENCH BENCH

Code	Description	Width	Length	Weight
210600	Trench bridge	1m	1.7m	34Kg
210601	Trench bridge	1m	2.2m	42Kg
210602	Trench bridge	1m	2.7m	51Kg
210603	Trench bridge	1m	3.2m	59Kg
210604	Trench bridge	1m	4.0m	98Kg
210605	Trench bridge	1m	6.0m	100Kg




- O For safe crossing of ditches and excavations
- O Full aluminium construction
- O Anti-slip deck
- O Integrated toe board
- O Carry handles on both sides allow ergonomic handling
- O Stackable hand rails fold for safe transport and storage
- O Bridges can be secured on ground by pegs
- O Additional grab handles available











## STEPOVER RANGE

SCAN CODE TO VIEW VIDEO



Choose your step angle, height and bridge length to build a premium grade stepover platform. Built tough with features such as a box section high tensile aluminium frame, and perforated plate deck surfaces.

#### 45° STAIR RANGE

Code	Description	Platform Height	Туре
210736	Stepover Stair & Handrails	373mm	2 Step
210737	Stepover Stair & Handrails	560mm	3 Step
210738	Stepover Stair & Handrails	850mm	4 Step
210739	Stepover Stair & Handrails	1120mm	5 Step
210740	Stepover Stair & Handrails	1266mm	6 Step
210741	Stepover Stair & Handrails	1400mm	7 Step

O 220mm deep ridged stair treads

O Bolt-down feet available

#### 70° LADDER RANGE

Code	Description	<b>Platform Height</b>	Туре
210700	Stepover Ladder & Handrails	560mm	2 Step
210701	Stepover Ladder & Handrails	850mm	3 Step
210702	Stepover Ladder & Handrails	1120mm	4Step
210703	Stepover Ladder & Handrails	1400mm	5 Step
210704	Stepover Ladder & Handrails	1700mm	6 Step

O Rubber feet as standard, retro fit permanent foot plates available





#### VERTICAL LADDER RANGE

Code	Description	Platform Height	Туре
210731	Stepover Vertical Ladder	560mm	2 Step
210732	Stepover Vertical Ladder	850mm	3 Step
210733	Stepover Vertical Ladder	1120mm	4 Step
210734	Stepover Vertical Ladder	1400mm	5 Step
210735	Stepover Vertical Ladder	1700mm	6 Step

O Rubber feet as standard, retro fit permanent foot plates available



# MODULAR STEPOVER

#### PLATFORM BRIDGE RANGE

Code	Description
210143	Stepover Platform Bridge 0.6mL x 0.8mW
210706	Stepover Platform Bridge 1.0mL x 0.8mW
210707	Stepover Platform Bridge 1.5mL x 0.8mW
210708	Stepover Platform Bridge 2.0mL x 0.8mW
210786	Stepover Platform Bridge 3.0mL x 0.8mW
210140	Stepover Platform Bridge 4.0mL x 0.8mW
210141	Stepover Platform Bridge 6.0mL x 0.8mW

O Perforated and swaged platform decks for grip and safety







## ALUMINIUM TRADE SERIES PLATFORM LADDER

Code	Туре	Deck Height	Weight
210300	2 Step	0.6m	8.0kg
210301	3 Step	0.9m	9.0kg
210302	4 Step	1.2m	10.0kg
210303	5 Step	1.5m	12.0kg
210304	6 Step	1.8m	13.0kg
210305	7 Step	2.0m	15.0kg
210306	8 Step	2.4m	17.0kg
210307	9 Step	2.7m	20.0kg

#### **FEATURES & BENEFITS**

- O Large non-slip platform surface for added safety when working at heights
- O Finger space beside platform no pinch points
- O Central locking latch
- O Folds flat for storage and transport
- O Wide, comfortable stair treads for easy access
- O Welded back brace greater rigidity, durability & safety
- O Diagonal back brace prevents ladder twisting
- O Reinforced aluminium inserts in feet for extra strength
- O Trapezoidal step treads for ultimate strength and stability









Complies with BS 131-2

#### FIBREGLASS TRADE SERIES PLATFORM LADDER

Туре	Deck Height	Weight
2 Step	0.6m	9.0kg
3 Step	0.9m	10.0kg
4 Step	1.2m	11.0kg
5 Step	1.5m	13.0kg
6 Step	1.8m	14.0kg
7 Step	2.0m	16.0kg
8 Step	2.4m	18.0kg
9 Step	2.7m	21.0kg
	2 Step 3 Step 4 Step 5 Step 6 Step 7 Step 8 Step	2 Step 0.6m   3 Step 0.9m   4 Step 1.2m   5 Step 1.5m   6 Step 1.8m   7 Step 2.0m   8 Step 2.4m

SEE PAGE 18 FOR ACCESSORIES





#### ALUMINIUM ADJUSTASTEP PLATFORM

Code	Туре	Height	<b>Overall Stile Length</b>	Weight
210261	4-7 Step	1.15m -2.02m	2.27m - 3.14m	21.8kg

#### **FEATURES & BENEFITS**

- O Height adjustable for working off a large safe platform at variable heights
- O Platform heights adjusted through each ladder's range in seconds
- O Set front and back stiles to varying heights for working on steps or uneven ground
- O Handrail allows for 3 points of contact
- O Large, hard wearing rubber feet for stable grip
- O Folds flat for storage and transport





**SAME LADDER 4 SIZES** 







4 STEP 1.2m PLATFORM HEIGHT

**5 STEP** 1.4m PLATFORM HEIGHT

6 STEP 1.7m PLATFORM HEIGHT

7 STEP 2.0m PLATFORM HEIGHT



## ACCESSORIES SUITABLE FOR SAFESMART PLATFORM LADDERS



210334 SPRING LOADED CASTOR

Allows users to manoeuvre around work space with ease





Full surround safety rail creates a safer working environment for any height



210336 CLIP-ON BUCKET

Store up to 15kg of tools

## FOLD-FLAT GUARD-RAILED PLATFORM

Code	Size	Weight
200205	0.45m-0.87m	26.8kg

200KG Weight Rating

#### FEATURES & BENEFITS

- O 6 height adjustment settings
- O Minimum platform height: 450mm
- O Maximum platform height: 870mm
- O Platform width: 600mm
- O Weight: 26.8kg
- O Safe working load: 200kg
- O Folds flat for storage and transport









# EDGE PROTECTION



#### ADAPTAPANEL

- O Temporary and semi-permanent slab edge protection
- O Heavy duty framed panel for longevity in harsh site conditions
- O Posts bolt to slab edge, and slide-in panels are secured with a fixing bolt
- O Optional coated finishes include galvanised and several powder coat colours for brand identification
- O Sliding safety latches retain mesh panels preventing unintentional lift-off
- O Available in multiple post heights: 1.0m, 1.5m, 2.0m & 3.0mH
- O The 1.0mH & 2.0mH panels are ideal for high rise construction and to assist with pez (perimeter exclusion zone)
- O Panels may be stacked for easy storage and transportation


Code	Description
210870	AdaptaPanel Edge Protection Face Mount Post - 1.0mH
210871	AdaptaPanel Edge Protection Face Mount Post - 1.5mH
210872	AdaptaPanel Edge Protection Face Mount Post - 2.0mH
210842	AdaptaPanel Edge Protection Post - 1.0mH
210843	AdaptaPanel Edge Protection Post - 1.5mH
210875	AdaptaPanel Edge Protection Post - 2.0mH
210876	AdaptaPanel Edge Protection Post - 3.0mH
210844	AdaptaPanel Mesh Fence Panel - 0.5mH x 1.0mL
210845	AdaptaPanel Mesh Fence Panel - 0.5mH x 2.0mL
210846	AdaptaPanel Mesh Fence Panel - 1.0mH x 1.0mL
210847	AdaptaPanel Mesh Fence Panel - 1.0mH x 2.0mL




50MM X 50MM MESH



## ADAPTAPANEL

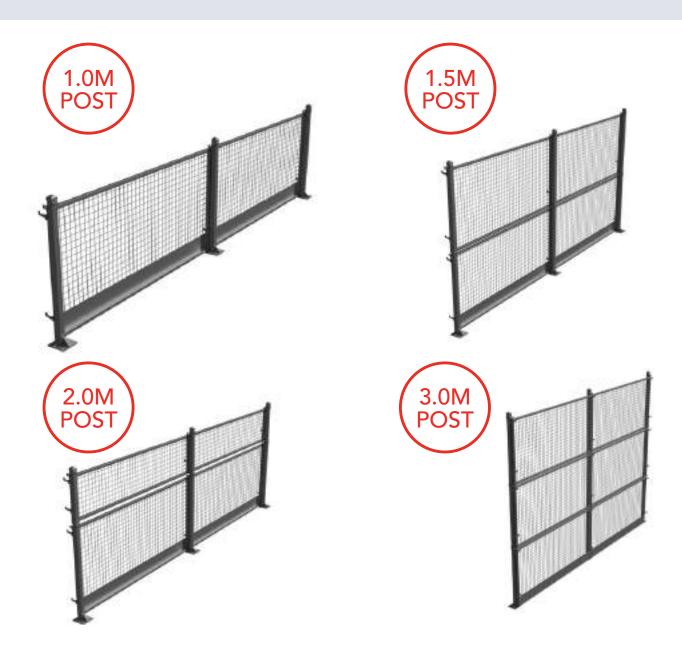

## PREVENT DROPS FROM SHOULDER HEIGHT

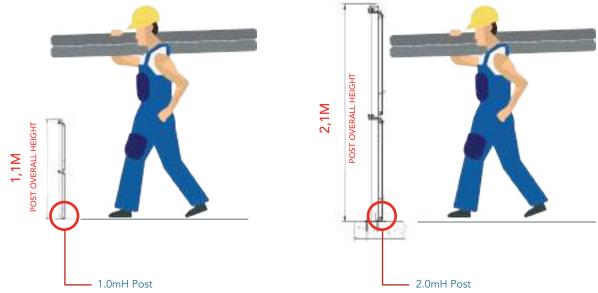

## NON-DRILL EDGE PROTECTION

### **NON-DRILL**




#### FEATURES & BENEFITS

- O Eliminate the need for drilling with the NON-DRILL edge protection and handrail system
- O Connect to lifting anchors on precast structures
- O NON-DRILL works seamlessly with 2.5, 5, 10T connections EdgePro/Hairpin lifting anchors + Ferrules
- O Connecting to the anchor eliminates human error and meets industry standards for edge protection
- O With NON-DRILL, you avoid costly labour hire, drilling into concrete, exposing steel and cutting off bolts
- O Apart from avoiding the need to drill, the big savings with the NON-DRILL system is installation time. You can install 12 NON-DRILL posts in the same time it takes to drill a typical post with 2 holes.
- O By planning ahead, incorporating anchors into the design, the SafeSmart team will work with your designers to position the anchors for both temporary edge protection and permanent handrails.



# NON-DRILL EDGE PROTECTION

Code	Platform Height	
230121	NON-DRILL Post - 1.060m	
230122	NON-DRILL 2.5T Clutch	
230123	NON-DRILL 5.0T Clutch	
230124	NON-DRILL 10.0T Clutch and extra baseplate	
230125	NON-DRILL Modified Clutch for Edge Lifter/Hairpin anchor Type 2 To Suit; Ancon 4t (Red)	
230126	NON-DRILL Modified Clutch for Edge Lifter/Hairpin anchor Type 1 To Suit; Ancon 8.5t (Purple), REID 7t Jaws (Orange), REID 8.5t 3DX (Yellow)	
230127	NON-DRILL Modified Clutch for Edge Lifter/Hairpin anchor Type 3 To Suit; Ancon 15t (Green), REID 10t Jaws (Blue)	
230128	NON-DRILL Modified Clutch for 16mm Ferrule/Drop In	
230129	NON-DRILL Modified Clutch for 20mm Ferrule/Drop In	
230120	NON-DRILL Post AdaptaPanel Bracket	

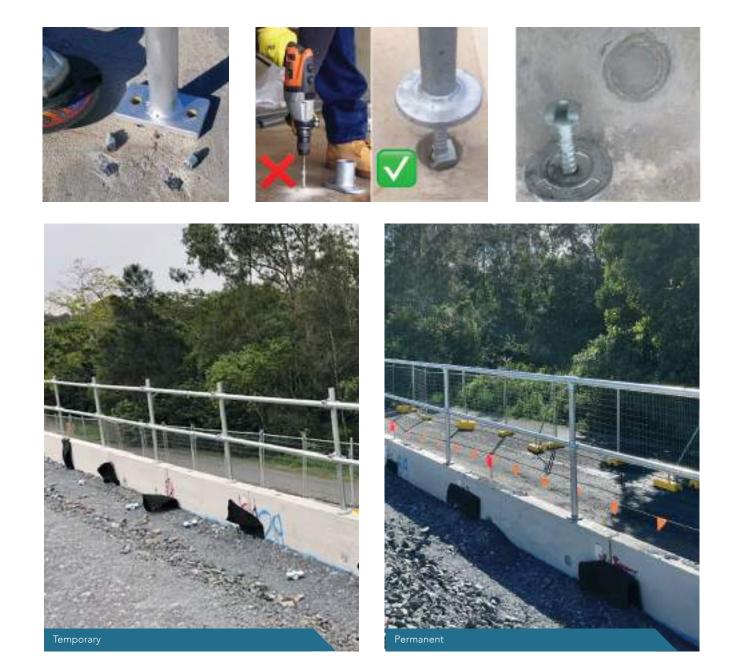



# TRUCK ACCESS

## SAFELOADER



#### SAFELOADER TRUCK ACCESS PLATFORM

Code	<b>Platform Dimensions - Description</b>	
210694	0.7mW x 1.4mH x 2.0mL Platform, Stairs one end	
210695	0.7mW x 1.4mH x 4.0mL Platform, Stairs one end	
210696	0.7mW x 1.4mH x 6.0mL Platform, Stairs one end	
210193	Joining Kit	
210697	Retro-fit fork sleeves to attach to platforms	
200500	Jacking Leg 1300kg	



SCAN CODE TO VIEW VIDEO

#### **FEATURES & BENEFITS**

- O Comes standard with crane lifting points
- O Fully cross braced aluminium frame for a rigid platform
- O Self closing gate at entrance to platform
- O 200mm heavy duty castors, swivel & locking
- O Originally designed for easy loading and unloading of trucks. Also compatible with a variety of heavy duty vehicles, mining machinery and trains for loading and maintenance









r firmit

SELF CLOSING SAFETY GATE

## TRUCK ACCESS STAIRS

Code	Description
210294	Portable Stair for Truck Access 6 Step

#### FEATURES & BENEFITS

- O Developed specifically for access to truck trays
- O No fixings required
- O Treads self level to suit tray heights of 0.9 1.4m



Complies with BS 12811-1



SCAN CODE TO VIEW VIDEO









## ALUMINIUM TRUCK EDGE PROTECTION PANEL

Code	Width	Height
200138	3.0m	2.5m

Complies with BS EN 13374: 2014


#### FEATURES & BENEFITS

- O Portable post and rail edge protection
- O Flat packs for storage & transportation
- O Light & easy to use simply roll up to truck & clip to tie rail
- O Suitable for tray heights up to 1.5m
- O Outriggers available if not possible to attach posts to truck



VIDEO



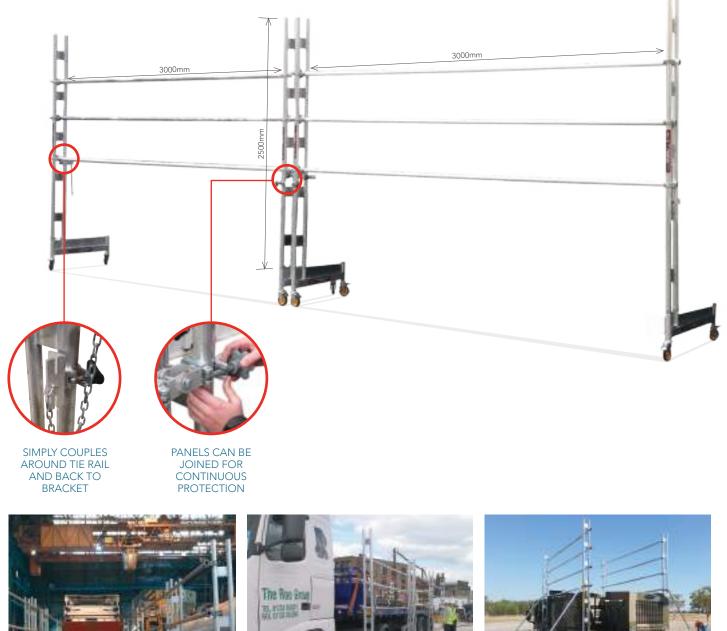

Custom solutions available

www.safesmartaccess.co.uk | sales@safesmartaccess.co.uk

## **TRUCK PODIUM**

Code	Platform Height	Туре	Deck Size
210195	1130mm	4 Step	800 x 800mm
210196	1400mm	5 Step	800 x 800mm

#### FEATURES & BENEFITS


- O Provides access and edge protection to rear of truck
- O Built tough with 82x 50mm marine grade aluminium RHS
- O Perforated & swaged deck for superior traction in wet and greasy conditions
- O Foam filled tyres
- O Anti-slip rubber feet
- O Solid non slip treads
- O Various configurations with options for single gate, salon gates, batwings



SCAN CODE TO VIEW VIDEO





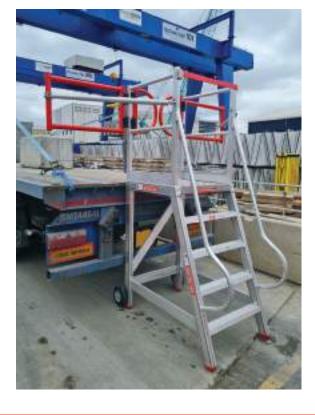







# MODULAR BRIDGES

-

# ADAPTASPAN MODULAR BRIDGE



#### **FEATURES & BENEFITS**

- O Modular Bridge system to provide safe access across trenches, canals, footpaths and sites
- O 1.2mW allows for two-way access
- O Join modules together to create a clear span bridge up to 21mL
- O Module sizes include; 1mL, 2mL and 3mL
- O Bridges can be separated into modules for relocation, transport and storage

#### **ADAPTASPAN**

Code	Description	Measurements
210136	Modular Bridge	1m module x 1.2mW, 2.5kPa
210145	Modular Bridge	2m module x 1.2mW, 2.5kPa
210137	Modular Bridge	3m module x 1.2mW, 2.5kPa
210134	Modular Bridge Anchor Bracket	-
210135	Modular Bridge Hinged End Ramp	0.7mL x 1.2mW
210129	Modular Bridge Crane Lifting Lug	-
210154	Modular Bridge Corner Module	1.2mW 90 degree
210155	Modular Bridge T Box Module	1.2mL x 1.2mW




## **CRANE BRIDGE ATTACHMENTS**


Code	Description	Measurements
210130	Modular Bridge Tower Crane Access Adapter Frame	0.6mL x 1.2mW
210131	Modular Bridge Bolt-On Extra height Guardrail Pair	1mL
210132	Modular Bridge Bolt-On Extra height Guardrail Pair	2mL
210133	Modular Bridge Bolt-On Extra height Guardrail Pair	3mL
210138	Modular Bridge Bolt-On 200mm Swivel / Braked Castors Pair of LH & RH	200mm
210139	Modular Bolt-On Height Adjustment Pack Pair	0-0.8mH Vertical Adjustment
210146	Modular Bridge Tower Crane Access Entry/Exit Swing Gate with Mesh	2mH x 1.2mW
210147	Modular Bridge Tower Crane Access Anti Climb Wings & Panel	2.5mH x 2.23mW

- O Increase safety for emergency evacuation procedures
- O Provide fast and efficient access for crane operators
- O Reduce risks associated with climbing internal access ladder



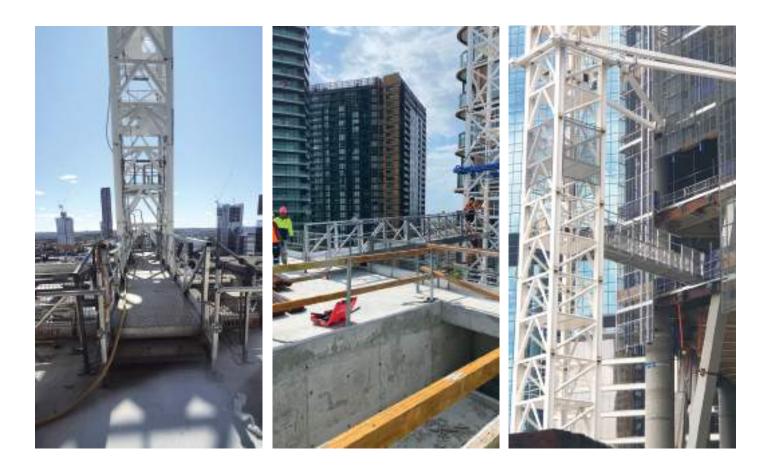

## ADAPTASPAN ACCESSORIES

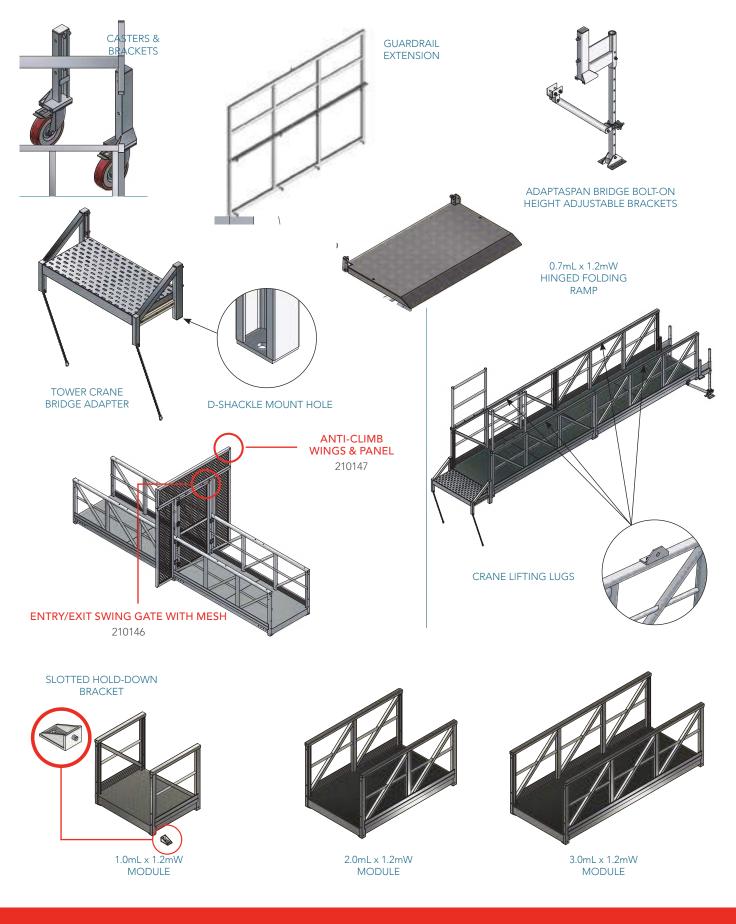

## ADAPTASPAN MODULAR BRIDGE





# SCAFFOLDING AND TUBULAR PODIUMS

M

13M

16

10

1175

135

1735

,正

1825

1175

ANTE:

67 B

1432

1435

1775

1735

14.72

*1825* 1835

1075

1V25 1V25 1YJ5


## PROSCAF CRANEABLE STRUCTURES

## CONSTRUCTION STAIR TOWERS

#### FEATURES & BENEFITS

- O 1.5 and 2m lift heights ensures access heights meet working platform heights, in typical building structures
- O Stairs are fully craneable using only Proscaf proprietary components
- O 1.5 and 2m lift heights allow for stairs to be installed parallel to working deck, to reduce stair footprint and maximise configuration flexibility
- O Lift off prevention devices to guard against accidental or wind load imposed lift off
- O Lightweight but strong Aluminium construction; ridged, slip resistant step treads for safety in all conditions



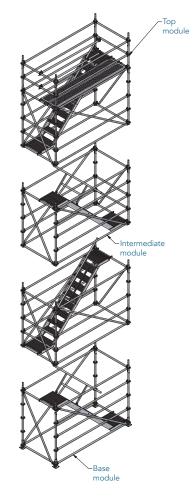

PRO<u>SCAF</u>



## **CLEAR SPAN / BRIDGING**




- O Where on-site access is required over obstructions or roads and walkways, Proscaf is used to provide a pre-engineered, compliant solution without the requirement for external components such as heavy support beams.
- O A constant platform height is maintained on bridging structures, as the spans are built directly off node points. Other systems may require support beams which lead to irregular step and platform heights.





## ALUMINIUM SCAFFOLD TOWERS

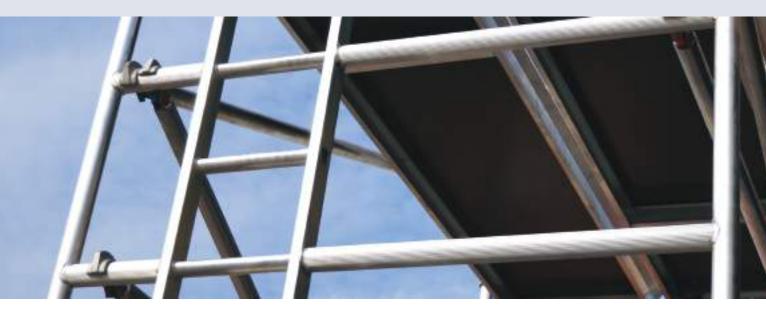

## TRADE SERIES - 0.85M WIDE

Description	Platform Height	Reach Height	Length
Tower + Kickboard	1.2m	3.2m	2.5m
Tower + Kickboard + Stabilisers	2.2m - 12.2m	4.2m - 14.2m	2.5m
Tower + Kickboard	1.2m	3.2m	3.2m
Tower + Kickboard + Stabilisers	2.2m - 12.2m	4.2m - 14.2m	3.2m



## TRADE SERIES - 1.45M WIDE

Description	Platform Height	Reach Height	Length
Tower + Kickboard	1.2m - 2.2m	3.2m - 4.2m	2.5m
Tower + Kickboard + Stabilisers	3.2m - 12.2m	5.2m - 14.2m	2.5m
Tower + Kickboard	1.2m - 2.2m	3.2m - 4.2m	3.2m
Tower + Kickboard + Stabilisers	3.2m - 12.2m	5.2m - 14.2m	3.2m

## MINI MOBILE SCAFFOLD

-	Code	Description
	234242	SAFESMART - Mini Mobile Scaffold - 1.9m Aluminium Scaffold
_	234243	SAFESMART - Mini Mobile Scaffold - 3.7m Aluminium Scaffold

- O Perfect for indoor use & tight access
- O Can be erected with just 1 person with minimal bracing needed, reducing overall assembly time
- O Unique channel locking platform





### LIFT SHAFT TOWER

#### **FEATURES & BENEFITS**

- O Built with the 3T (Through the Trapdoor) method the lifts shaft tower is a great working at height solution for a confined space problem, such a lift shaft.
- O The tower has a wide range of heights available reaching up to the 30.95m in platform height.
- O Specialised Lift Shaft Tower Props to help stabilise the tower while in the lift shaft.

#### STAIRWELL TOWERS

#### **FEATURES & BENEFITS**

- O Made from high grade aluminium
- O Ideal for tight spaces and landing areas on stairwells
- O Removable ladder for ease of access
- O 250mm Rung pitching
- O Single piece folding toe board
- O 2 Stabiliser options available (standard or wall prop)
- O Adjustable legs and base plates
- O Floating spigots for ease of erecting and dismantling



## **BESPOKE TOWERS AVAILABLE**

- O Cantilever
- O Bridging
- O Confined Spaces





47

www.safesmartaccess.co.uk | sales@safesmartaccess.co.uk

# PODIUMS

## **BS8620 PODIUM PLATFORM**

Code	Description	Platform Size	Platform Height
BS8620-07	Aluminium podium	0.6m x 0.6m	0.75m
BS8620-1	Aluminium podium	0.6m x 0.6m	1.0m
BS8620-12	Aluminium podium	0.6m x 0.6m	1.2m
BS8620-15	Aluminium podium	0.6m x 0.6m	1.5m
BS8620-17	Aluminium podium	0.6m x 0.6m	1.7m
BS8620-20	Aluminium podium	0.6m x 0.6m	2.0m

#### FEATURES & BENEFITS

- O High grade aluminium construction
- O Lightweight for maneuverability
- O Folds up compactly
- O Two height settings
- O Can be fitted with anti-surf feet








## **STAIR PODIUM**

Code	Size	Height
38014	6.0m x 6.0m	500mH

- O Platform area is an ideal size for one man and tools
- O The unit is fitted with adjustable plates, ideal for any staircase
- O Non slip platform board
- O Gated access to allow ease of entry and exiting to and from the unit
- O Stabilisers included







# HEIGHT ADJUSTABLE PLATFORMS

1-

State Inc. in Los

## EASY RAISE PLATFORM



### EASY RAISE PLATFORM

Code	Description
210766	SAFESMART EASY RAISE 1.2-2.4m Height Adjustable 4 Steps
210767	SAFESMART EASY RAISE 1.4-2.8m Height Adjustable 5 Steps
210768	SAFESMART EASY RAISE 1.7-3.4m Height Adjustable 6 Steps
210769	SAFESMART EASY RAISE 2.0-4.0m Height Adjustable 7 Steps

#### FEATURES & BENEFITS

- O Height adjustable with manual winch
- O Incrementally adjustable, locking out at each step
- O Adjusts to double its height
- O Compact and mobile for easy deployment
- O Cantilever increases as platform raises
- O Durable marine grade aluminium





CANTILEVER INCREASES AS PLATFORM RISES

## EASY RAISE PLATFORM







## ULTRARAISE

Code	Description
	•
210375	7 Step UltraRaise Fixed Cantilever H/Adj Platform 1.97mH – 3.38mH w. 70deg Acc.
210376	10 Step UltraRaise Fixed Cantilever H/Adj Platform 2.82mH – 4.51mH w. 70deg Acc.
210377	UltraRaise Retrofit Loop Guardrail Frame, 1.2mD x 1.5mW
210378	UltraRaise Retrofit Loop Guardrail Frame, 2.0mD x 2.0mW
210379	UltraRaise Bridge 3.0mL x 0.6mW w removable GR MD & TB ea side

#### FEATURES & BENEFITS

- O Massive height adjustment range!
- O Compact and mobile for easy deployment and use in tight workshops.
- O 700mm clear cantilever regardless of the height it is set at.
- O Height adjustable platform with a manual winch.
- O 3 access directions off the platform allowing for flexibility in configuration.
- O Bridging attachment to connect between units has multiple configurations.
- O Bridging components, no heavier than 17kgs to allow easy install and dismantle.
- O Bubble levels at each jack location to assist with levelling.
- O Loop guardrail attachment can be placed in all 3 directions off the platform.






**10 STEP** 




#### ADJUSTMENT RANGE

#### BRIDGE ATTACHMENT CONNECTION DETAILS

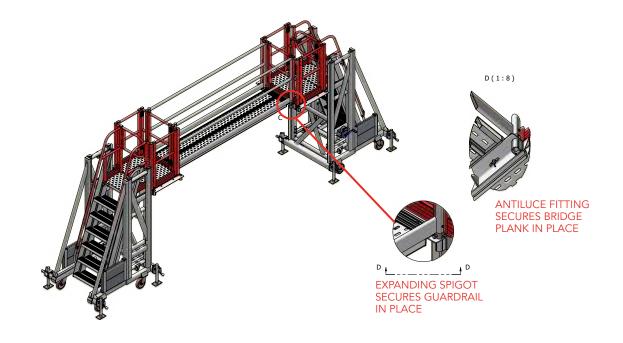

#### LOOP GUARDRAIL ATTACHMENT

210378 Small Loop Guardrail Frame







# SOUND CONTROL SOLUTIONS AVAILABLE FOR HIRE OR SALE

# 0845 382 1000

www.safesmartaccess.co.uk

DIISTRIBUTING QUIETNESS THROUGH



# HUSHTEC SOUND CONTROL

S

Reach

SOUND CON AVAILABLE

0845 3

www.safesma

WWWDUR



Reaching new heights

# SOUND CONTROL SOLUTIONS AVAILABLE FOR HIRE OR SALE

# 0845 382 1000 www.safesmartaccess.co.uk

DISTRIBUTING QUIETNESS THROUGH

14/1/1/V.DURAFLEXDISTRIBUTION.CO.UK

ALC: NO

## ROCK BREAKER SHROUD

Developed to mitigate the hammer noise effects, control dust and prevent abrasive injuries to personnel onsite by also controlling flying concrete chip and debris.


Code	Size	
HRBA1	1 - 5T	
HRBA2	6 - 10T	
HRBA3	11 - 15T	
HRBA4	16 - 20T	
HRBA5	21 - 25T	
HRBA6	26 - 30T	

#### FEATURES & BENEFITS

- O Mitigates noise (most effective to capture at source)
- O Reduces dust
- O Prevents flying debris/chip
- O 1-minute install / removal
- O Available to suit breakers from 1T over 50T in size
- O Personalised branding available

#### NOISE TESTING

#### THIRD OCTAVE BAND SPECTRA FOR MEASUREMENTS

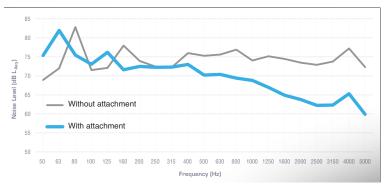





#### SCAN CODE TO VIEW VIDEO

#### MEASUREMENT RESULTS

Duration (m:ss)	Noise Level
6.25	78 dB LAeq
7.35	86 dB LAeq
	(m:ss) 6.25

## HUSHTEC SOUND CONTROL

#### PHONE BOX

Code	Dimensions
HUSHPB	Width 750mm, Height 750mm, Depth 750mm

#### FEATURES & BENEFITS

- O Provides a quiet environment for site personnel to make phone calls. Especially useful in the event of an emergency
- O Quick and easy to install (recommended every 30 40m apart)
- O Lightweight and relocatable
- O Ideal document station
- Reflective strip and fleuro colours available for increased site awareness
- O Personalised branding and custom sizing available



## ACOUSTIC TENT

- Allow working throughout the night without disturbing the peace of those nearby
- O Offers sound absorption of up to 90%
- Fully mobile system
- O Packs down to the size of a pallet for easy transportation



## PERFORMANCE SERIES BARRIER

Code

HUSHP13

Dimensions

Hushtec Performance Series Noise Reducing Panel 1.3mW x 2mH - 23dB Rating / NRC 0.9

#### FEATURES & BENEFITS

- O Effective re-useable acoustic panels
- O Absorbs and reflects sound
- O Up to 23dB sound reduction, noise absorption up to 75%
- O Quick and easy to erect and fully transportable
- O Can also control the spread of dust and fumes
- O Weather and UV resistant
- O Can be used inside or outside
- O Personalised branding available





## MISSION SERIES BARRIER

Code	Dimensions
HUSHT13	Hushtec Mission Series Noise Reducing Panel 1.3mW x 2mH – 39dB Rating
HUSHT36	Hushtec Mission Series Noise Reducing Panel 3.6mW x 2mH – 39dB Rating

#### FEATURES & BENEFITS

- O Effective re-useable acoustic panels
- O Reflects sound
- O Up to 39dB sound reduction
- O Quick and easy to erect and fully transportable
- O Can also control the spread of dust and fumes
- O Weather and UV resistant
- O Can be used inside or outside
- O Personalised branding available





58

SOME OF OUR VALUED CLIENTS































Reaching new heights

www.safesmartaccess.co.uk 0845 382 1000

## **EUROPEAN LOCATIONS**

UNITED KINGDOM

London - Bristol - Lincoln Birmingham - Cambridge - Cardiff FRANCE

Paris - Toulon

# **GLOBAL LOCATIONS**

**AUSTRALIA** Sydney - Melbourne - Brisbane

USA Los Angeles - New York - Cleveland

CANADA Regina - Toronto - Vancouver

NZ

Auckland