



Mining Catalogue

Edition 3 | 2026

 **SafeSmart**
MINING

A Better Way

UK 0845 382 1000

Height Access Solutions
www.safesmartaccess.co.uk

The Brand Trusted by Leading Mining Companies Worldwide

SafeSmart is a trusted provider of height access solutions to the mining industry, backed by over 20 years of experience. Our expertise spans Mobile Workshops, Field Maintenance, Fixed Plant, and Infrastructure, with a commitment to ensuring every access and egress point across your operation is safe, compliant, and efficient for your workforce.

Our team works closely with maintenance operations to reduce the risks associated with working at height while supporting efficient work functions across site. SafeSmart solutions are designed to protect maintenance teams, minimise incidents, and maintain optimal operational efficiency. We partner with some of the industry’s leading organisations, delivering both off-the-shelf and bespoke access systems that solve complex access challenges across every facet of a mining operation.

SafeSmart, together with our specialist division ProScaf, operates globally with branches in Australia, New Zealand, the United Kingdom, France, Canada, United States, and Chile. We understand the regulatory requirements for safety compliance in each region and design our products according to global safety standards.

A Better Way

With in-house design experts, advanced production, and independent certification, SafeSmart delivers A Better Way to access, maintain, and manage your operations, reducing downtime and keeping your teams safer and more efficient.



01

Standard Products

Pages 5 - 38

Ready-to-go solutions for safe height access and edge protection on vehicles and machinery.




02

Open Cut Solutions

Pages 39 - 62

Tailored access platforms for dozers, haul trucks, and loaders, designed to simplify maintenance and improve safety.

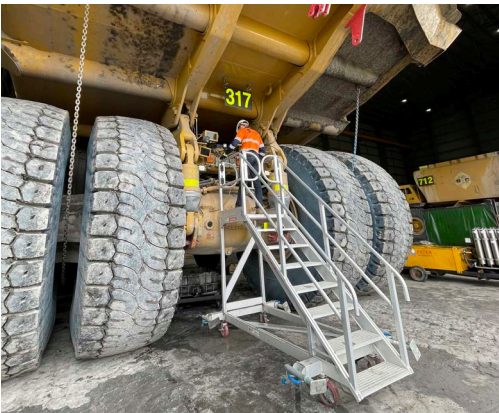


03

Underground Solutions

Pages 63 - 69

Custom built height access systems designed for safe and efficient maintenance of underground equipment.

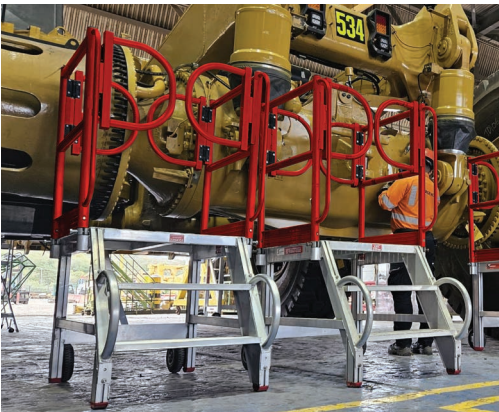


04

ProScaf

Pages 70 - 71

Flexible scaffold systems to provide safe and efficient height access around workshops and mine sites.

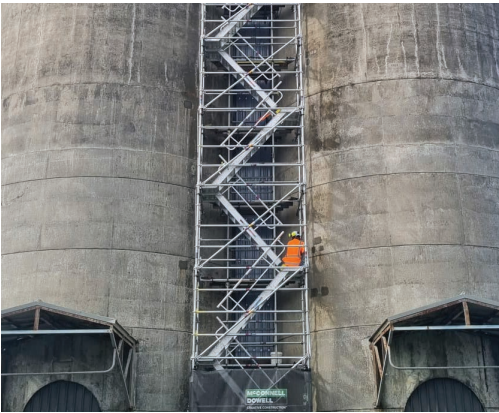

Scaffold Eating up too much of your Budget?


Scaffolding is a necessary part of any mining project, but it doesn't have to break the bank.

At SafeSmart, we understand the challenges of shutdowns and maintenance work. That's why we offer scaffold reduction audits, designed to help you cut costs, improve efficiency, and work smarter.

Our team conducts onsite reviews of your current scaffolding setup, identifying opportunities where safer, more practical work platforms can be used instead. By collaborating closely with your site team, we ensure every recommendation aligns with the specific needs of the job.

The goal: minimise scaffolding, maximise safety, and streamline your onsite access.

Simple 4-Step Process



Engage with on-site teams



Scope and audit



Review existing process



Evaluation & solution proposal

Advantages of Completing a Site Audit

- Lower contract load – Limit subcontracting to complex access applications requiring scaffolding.
- Reduced on-site risk – Fewer personnel and less manual labour on site.
- Less scaffolding required – Minimise structures and reduce onsite tonnage.
- Optimised work processes – Simplified and efficient access and installation methods.
- Leaner crews – Reduce tasks from 3–4 people to just 1–2.

Taking site constraints and conditions into account, SafeSmart delivers practical, custom solutions, from bespoke work platforms to alternative access systems, designed specifically for each work area.

After the review, your site team receives a detailed proposal outlining each area and scaffolding structure identified in the audit, along with a direct alternative solution. This may include a made-to-order design or ready-to-go, off-the-shelf systems.

All solutions are designed to work within space limitations while ensuring efficient, safe access, without compromising budget or ease of manual handling.



Section 01 Stocked Solutions

Warthog Platform Ladder	6	AdjustaStairs	31
AdjustaStep	8	SmartStairs	32
SuperChariot	9	Modular StepOver 0.8mW	34
Super Maintenance Platform	10	Modular StepOver 1.2mW	36
Super Service Stand	14	Modular StepOver 0.8mW Accessories	37
Cantilever Platform	16		
EasyRaise Platform	18		
ReachDeck Platform	20		
UltraRaise Platform	22		
BridgeDeck	24		
SafeLoader Platform	26		
Aluminium Edge Protection Panel	29		
Adjustable Chassis Rail Edge Protection	30		

A Better Way



01 Stocked Solutions Warthog Platform Ladder


Code	Type	Size (Deck Height)
210093	2 Step	0.6m
210094	3 Step	0.9m
210095	4 Step	1.2m
210096	5 Step	1.5m
210097	6 Step	1.8m
210098	7 Step	2.1m
210099	8 Step	2.4m
210100	9 Step	2.7m
210101	10 Step	3.0m
210201	Spring Loaded Castor (ea)	
210128	Full Surround Safety Rail	

- 10-year manufacturer’s warranty.
- Fully welded box section aluminium frame.
- Won’t twist like a standard platform ladder.
- Platform kick board stops slips & spills.
- Large comfortable platform & handrail for longer duration work.
- Folds flat for storage & transportation.

180kg
WLL

Complies with
BS EN 131

10 Year Wear &
Tear Guarantee

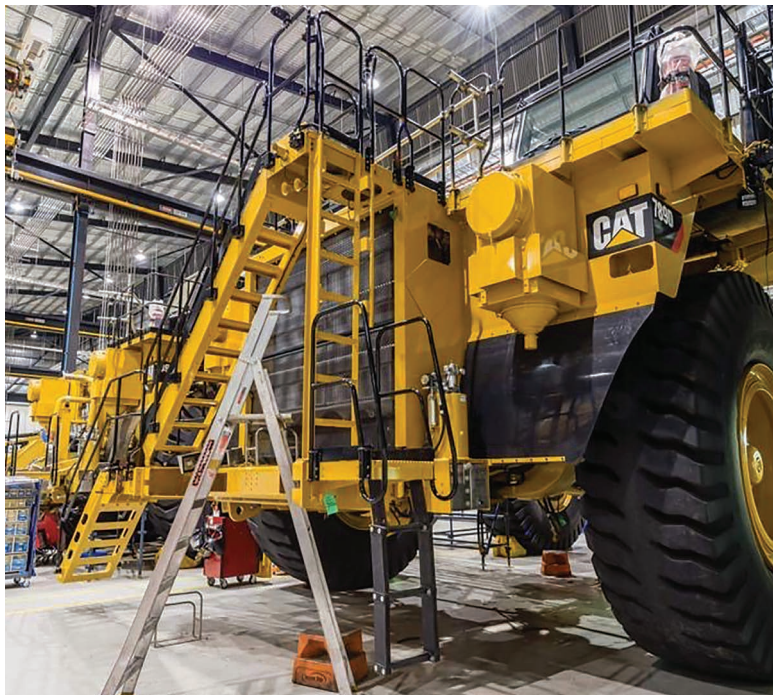

01 Stocked Solutions Warthog Platform Ladder



01 Stocked Solutions

Aluminium AdjustaStep

Code	Type	Deck Height	Weight
210261	4 - 7 Step	1.15m - 2.02m	22kg

200KG
SWL

Complies with
BS EN 131

- Height adjustable for working off a large scale platform at variable heights.
- Platform heights adjusted through each ladder's range in seconds.
- Set front and back stiles to varying heights for working on steps or uneven ground.
- Handrail allows for 3 points of contact.
- Large rubber feet for stable grip and hard wearing.
- Rated to 200kg for industrial applications.
- One-piece, smooth operation – simply folds flat and locks.
- Can be fitted with accessories – tool bucket and full surround handrail.



Shown With Full Surround Safety Rail (Sold Seperately)

Fibreglass AdjustaStep

Code	Type	Deck Height	Weight
210264	3 - 5 Step	0.83m - 1.42m	23.7kg
210265	4 - 7 Step	1.15m - 2.02m	30.0kg

150KG
SWL

Complies with
BS EN 131

- Height adjustable for working off a large scale platform at variable heights.
- Platform heights adjusted through each ladder's range in seconds.
- Set front and back stiles to varying heights for working on steps or uneven ground.
- Handrail allows for 3 points of contact.
- Large rubber feet for stable grip and hard wearing.
- Rated to 150kg for industrial applications.
- One-piece, smooth operation – simply folds flat and locks.
- Can be fitted with accessories – tool bucket and full surround handrail.



Available With Full Surround Safety Rail

01 Stocked Solutions

SuperChariot

Code	Platform Height	Type
210450	565mm	2 Step
210451	850mm	3 Step
210452	1130mm	4 Step
210453	1400mm	5 Step
210454	1700mm	6 Step
210455	1975mm	7 Step
210456	2250mm	8 Step

- Full surround handrails.
- Heavy-duty design for construction work.
- 200kg weight rating.
- Step through access.

200kg
SWL

Complies with
BS 2037:1994



01 Stocked Solutions

SafeSmart Signature Series

Super Maintenance Platform

Code	Platform Height	Platform Size	Type
210520	565mm	800 x 800mm	2 Step
210521	850mm	800 x 800mm	3 Step
210522	1130mm	800 x 800mm	4 Step
210523	1400mm	800 x 800mm	5 Step
210524	1700mm	800 x 800mm	6 Step
210525	1970mm	1000 x 1000mm	7 Step
210526	2250mm	1000 x 1000mm	8 Step
210527	2540mm	1000 x 1000mm	9 Step
210528	2828mm	1000 x 1000mm	10 Step
210529	3100mm	1000 x 1000mm	11 Step
210530	3300mm	1000 x 1000mm	12 Step
210531	3600mm	1000 x 1000mm	13 Step
221532	3950mm	1000 x 1000mm	14 Step

- Engineers' approval, SWL rating & serial number certification plate.
- Built tough with 82 x 50mm marine grade aluminium RHS - no C channel.
- Perforated & swaged deck for superior traction in wet and greasy conditions.

225kg

SWL

Complies with

BS EN 131

5 Year

Warranty



01 Stocked Solutions

Super Maintenance Platform

A Closer Look



01 Stocked Solutions

Super Maintenance Platform
Accessories

Batwing Gates

Code	Description	Type
210770	Batwing Gates 800mmW	2 - 6 Step
210771	Batwing Gates 1000mmW	7 - 14 Step

- Self-closing Batwing Gate at the entrance of the platform.
- User friendly operation when compared to a traditional bar or non-compliant chain.
- Offers greater protection by providing a safe guardrail and midrail around the stairs entrance.



Full Height Gates

Code	Description	Type
200512	Full Height Gates 800mmW	2 - 6 Step
200513	Full Height Gates 1000mmW	7 - 14 Step

- Self Closing Full Height Saloon Gates at the entrance to the platform.
- User friendly operation when compared to a traditional bar or non-compliant chain.
- Offers greater protection by providing a safe guardrail and midrail around the stairs entrance.



Swing Gate

Code	Description	Type
200520	Single Swing Gate 800mmW	2 - 6 Step
200521	Single Swing Gate 1000mmW	7 - 14 Step


- Self Closing Swing Gate at the entrance to the platform.
- User friendly operation when compared to a traditional bar or non-compliant chain.
- Offers greater protection by providing a safe guardrail and midrail around the stairs entrance.



Retrofit Side Entry Gate

Code	Description
220121	0.8m Retrofit LH Side Entry Gate Set
220122	0.8m Retrofit RH Side Entry Gate Set
220119	1.0m Retrofit LH Side Entry Gate Set
220120	1.0m Retrofit RH Side Entry Gate Set

- Fits in place of standard side guardrails.
- Provides walk-through access off side of platform.

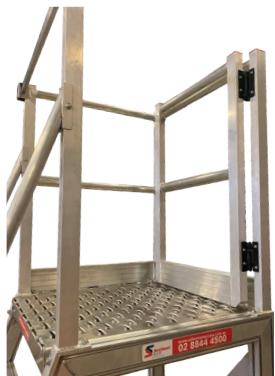

01 Stocked Solutions

Super Maintenance Platform
Accessories

Retrofit Dual Exit Gates

Code	Description	Type
220126	0.8 Retrofit Dual LH & RH Exit Gate w. Fixed End Panel	2 - 6 Step
220127	1.0 Retrofit Dual LH & RH Exit Gate w. Fixed End Panel	7 - 14 Step

- Allows walk-through access off both sides of the platform.



Retrofit Forklift Channel - Set of 2

Code	Description
210291	Retrofit 0.8mL Forklift Channel Set of 2
210292	Retrofit 1.0mL Forklift Channel Set of 2

- Bolts on to platform base.
- Retrofit 0.8mL Forklift channels are suitable for Super Maintenance Platforms up to 6 Steps.
- Retrofit 1.0mL Forklift channels are suitable for Super Maintenance Platforms 7 Steps and above.



125mm Castor Kit - Retrofit

Code	Description
210744	125mm Castor Kit - Retrofit

- Set of 4 bolt-on swivel and locking castors.
- Replaces the existing two wheels on the platform frame.



01 Stocked Solutions

SafeSmart Signature Series

Super Service Stand

Code	Platform Height	Platform Size	Steps
210570	550mm	800mmL x 900mmW	2 Step
210571	825mm	800mmL x 900mmW	3 Step
210572	1100mm	800mmL x 900mmW	4 Step
210573	1350mm	800mmL x 900mmW	5 Step
Guardrails Sold Separately			
210574	Super Service Stand Guardrail Set with Self-actuating Batwing entry/exit - Pair		2-5 Step

- Large, safe work area with self-draining platform surface (for slip resistance in all conditions).
- Wide stair treads for comfort and safety.
- 60° step angle of access.
- Quick release guardrails can be added or removed in seconds.
- Dual Batwing Gates for full surround protection.

225kg

SWL

Complies with

BS EN 131


5 Year

Warranty

Platform shown without handrails



Handles for manoeuvrability simply lift to engage the front wheels.

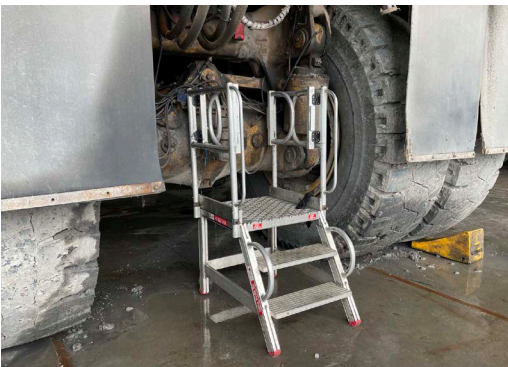


01 Stocked Solutions

Super Service Stand


A Closer Look



Quick-Release Handrails



Raised And Swaged 4mm Anti-Slip Plate Platform




Handrails For Manoeuvrability



Ultra-Wide Step Treads



Heavy-Duty Box Aluminium Frame



01 Stocked Solutions

SafeSmart Signature Series

Cantilever Platform

Code	Platform Height	Platform Size	Steps
210540	565mm	800 x 1800mm	2 Step
210541	850mm	800 x 1800mm	3 Step
210542	1130mm	800 x 1800mm	4 Step
210543	1400mm	800 x 1800mm	5 Step
210544	1700mm	800 x 1800mm	6 Step
210545	1970mm	1000 x 2000mm	7 Step
210546	2250mm	1000 x 2000mm	8 Step
210547	2540mm	1000 x 2000mm	9 Step
210548	2828mm	1000 x 2000mm	10 Step
210549	3100mm	1000 x 2000mm	11 Step
210550	3300mm	1000 x 2000mm	12 Step
210551	3600mm	1000 x 2000mm	13 Step
210552	3950mm	1000 x 2000mm	14 Step
210553	7 Step Cantilever Platform 1.0mL Upgrade Kit/Package*		
210554	8 Step Cantilever Platform 1.0mL Upgrade Kit/Package*		
210555	9 Step Cantilever Platform 1.0mL Upgrade Kit/Package*		
210556	10 Step Cantilever Platform 1.0mL Upgrade Kit/Package*		
210557	11 Step Cantilever Platform 1.0mL Upgrade Kit/Package*		
210373	Retrofit Wind Down Jack Set		
210293	Retrofit 0.8mL Forklift Channel Set of 2 (suits up to 6 steps)		
210294	Retrofit 1.0mL Forklift Channel Set of 2 (suits 7 step and above)		

*1.0mL upgrade kits will reduce the protrusion of the base rails, and increase the cantilever to 1009mm clear overhang.

- An essential tool for all machinery service workshops.
- Allows you to get right into and up against your work area without reaching out from the platform.
- Built tough, non-slip perforated deck and aluminium frame.

225kg
SWL



Complies with
BS EN ISO 14122

5 Year
Warranty

Custom Cantilever
Platforms Also
Available



CLEARANCE FOR CANTILEVER PLATFORMS

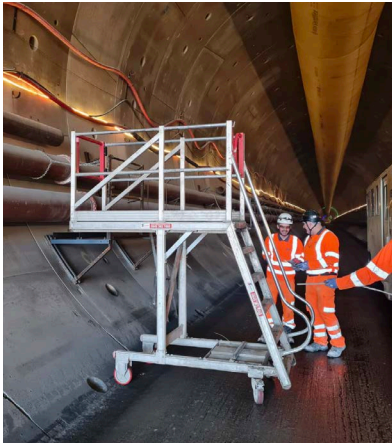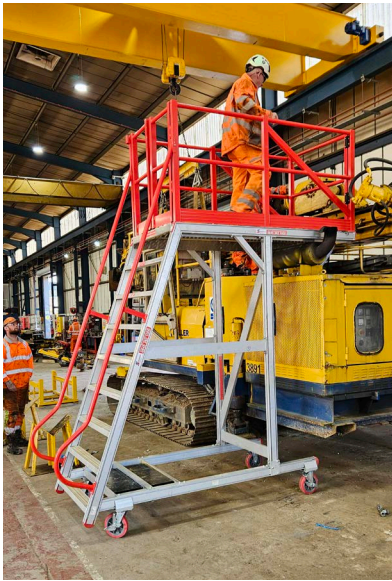

01 Stocked Solutions

Cantilever Platform

A Closer Look



Stair Access
Option Also
Available

Stocked Solutions

Open Cut Solutions

Underground Solutions

Proscaf

01 Stocked Solutions

SafeSmart Signature Series

EasyRaise

Code	Description	Platform Height
WHDPH04	4 - 8 Step	1.2m - 2.4m
WHDPH05	5 - 10 Step	1.4m - 2.8m
WHDPH06	6 - 12 Step	1.7m - 3.4m
WHDPH07	7 - 14 Step	2.0m - 3.95m
210103	EasyRaise Retrofit Forklift Channel Set of 2	

- Other sizes are also available - please enquire
- Height adjustable platform with manual winch.
 - Incrementally adjustable with platform heights at 282mm intervals.
 - Compact & mobile for easy deployment.
 - Cantilever length increases as the platform is raised.

225kg

SWL

Complies with

BS EN ISO 14122



One Platform - Doubles In Height



EasyRaise 4-Step Platform (210371)



EasyRaise 4-Step Platform (210371)
6 Step Height Adjustment



EasyRaise 4-Step Platform (210371)
8 Step Height Adjustment

01 Stocked Solutions

EasyRaise

A Closer Look




01 Stocked Solutions ReachDeck Platform

Code	Description
210371	ReachDeck - 9 Step (2.0mH - 3.15mH)
210370	ReachDeck - 15 Step (3.375mH - 5.4mH)
210372	ReachDeck Platform Only (Small) 0.9mL x 1.05mW
210372	ReachDeck Platform Only (Large) 1.0mL x 2.5mW - Standard Guardrail Frames
210372	ReachDeck Platform Only (XL) 1.4mL x 3.0mW - Aviation Guardrail Frames
210372	SafeWrap Towbar
210372	ReachDeck Retrofit Loop Guardrail Frame (1.2mD x 1.5mW)
210372	ReachDeck Retrofit Loop Guardrail Frame (2.0mD x 2.0mW)
210372	ReachDeck Bridge 3.0mL x 0.6mW with removable Guardrail, Midrail & Toeboard

500kg
WLL

Complies with
BS EN ISO 14122

- Adjusts in height from 2.0 up to 5.4mH via a manual winch (hydraulic or pneumatic adjustment options also available).
- Crane or air - liftable, for ease of transport offshore (Crane lifting plan included).
- Platform options include fall restraint points, for user safety when stepping out onto larger vehicles.

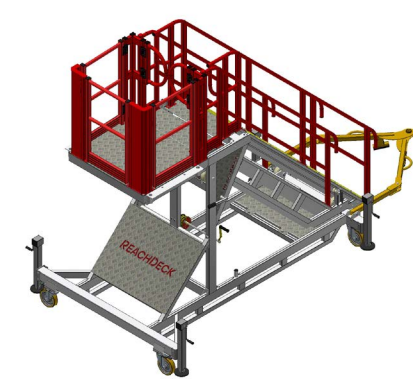

211102
ReachDeck Platform (Small)
0.91mL - 1.05mW





211103
ReachDeck Platform (Large)
1.0mL - 2.5mW with Standard
Guardrail Frames



211104
ReachDeck Platform (XL)
1.4mL - 3.0mW with Aviation
Guardrail Frames

01 Stocked Solutions ReachDeck Platform

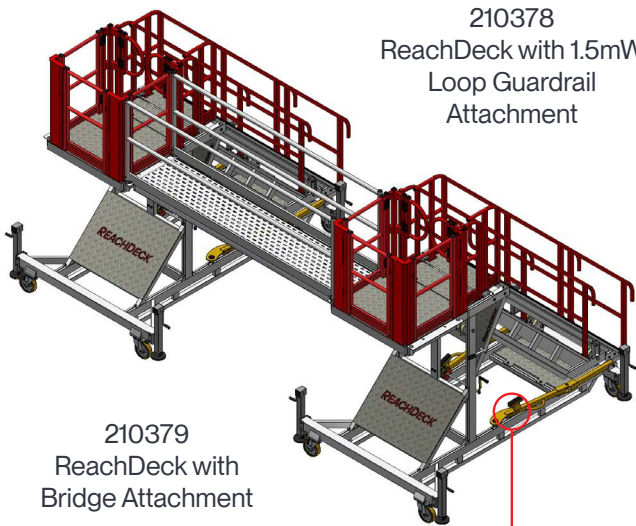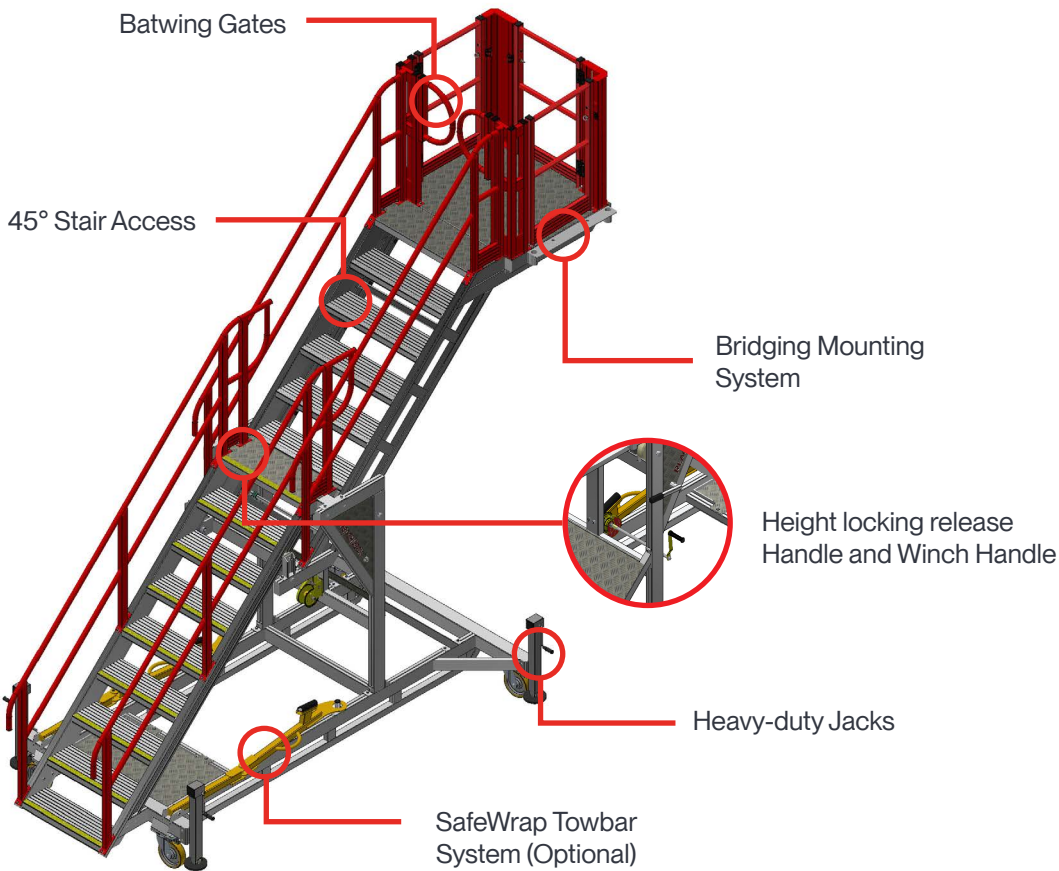

211105
SafeWrap Towbar



210377
ReachDeck with 2.0mW Loop
Guardrail Attachment


01 Stocked Solutions

SafeSmart Signature Series

UltraRaise


Code	Description
210375	7 Step UltraRaise Fixed Cantilever H/Adj Platform 1.97mH – 3.38mH w. 70deg Acc
210376	10 Step UltraRaise Fixed Cantilever H/Adj Platform 2.82mH – 5.07mH w. 70deg Acc
210378	UltraRaise Retrofit Loop Guardrail Frame, 1.2mD x 1.5mW
210377	UltraRaise Retrofit Loop Guardrail Frame, 2.0mD x 2.0mW
210379	UltraRaise Bridge 3.0mL x 0.6mW with removable Guardrail, Midrail & Toeboard (ea side)

- Platform height and bridge lengths are customisable.
- Massive height adjustment range!
- Compact and mobile for easy deployment and use in tight workshops.
- 700mm clear cantilever regardless of the height it is set at.
- Height adjustable platform with a manual winch.
- 3 access directions off the platform allowing for flexibility in configuration.
- Bridging attachment to connect between units allows multiple configurations.
- Bridging components no heavier than 17kgs to allow easy install and dismantle.
- Bubble levels to assist with levelling.
- Loop guardrail attachment can be placed in all 3 directions off the platform.
- Loop guardrail support leg adjusts in 25mm increments.

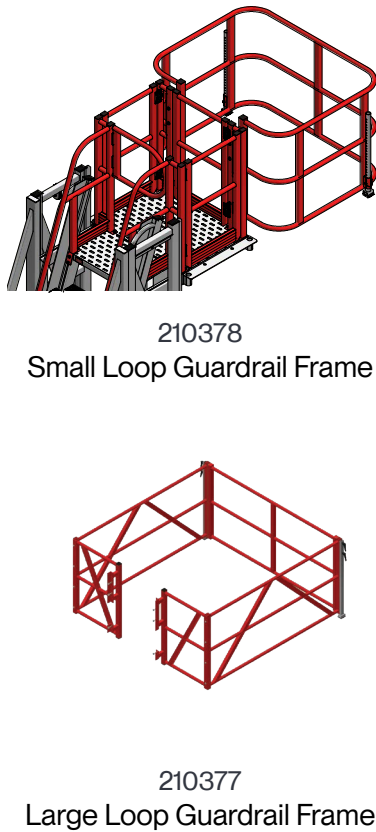

01 Stocked Solutions

UltraRaise Platform - Accessories & Gallery

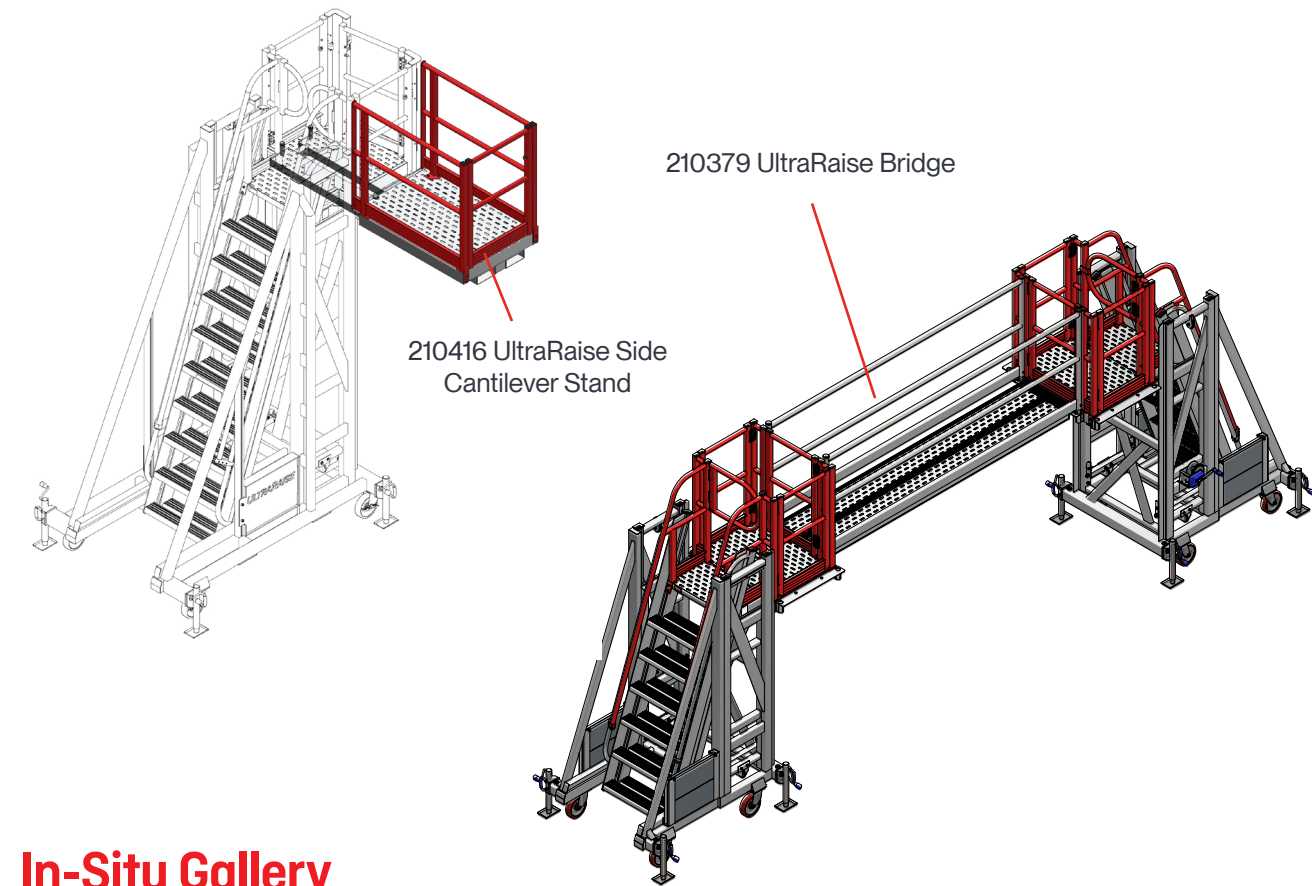

In-Situ Gallery



01 Stocked Solutions

SafeSmart Signature Series


BridgeDeck

Code	Description	Max Height
210465	BridgeDeck 6 Step Base Platform (LH Access)	1700mm
210466	BridgeDeck 6 Step Base Platform (RH Access)	1700mm
103165	BridgeDeck 7 Step Base Platform (LH Access)	1970mm
103168	BridgeDeck 7 Step Base Platform (RH Access)	1970mm
210467	BridgeDeck 9 Step Base Platform (LH Access)	2540mm
210468	BridgeDeck 9 Step Base Platform (RH Access)	2540mm
210469	BridgeDeck - Adjustment Pack (to suit 6/9 step) - 900mm	2600mm (6 Step), 3440mm (9 Step)
210470	BridgeDeck - Adjustment Pack (to suit 9 step) - 1200mm	3440mm
210471	BridgeDeck Bridge 2.5mL Bridge	
210472	BridgeDeck Bridge 3.0mL Bridge	
210473	BridgeDeck Bridge 4.2mL Bridge	

- Perfect for bridging access over plant and equipment.
- Can be used without bridge as maintenance platforms, or with bridge as a complete system.
- Height adjustment packs are used to configure to differing bridge heights.
- Easily height adjustable using hand winch.
- Can bridge off side or end of base units.
- Pneumatic wheels are available for rough terrain.

Complies with

BS EN ISO 14122

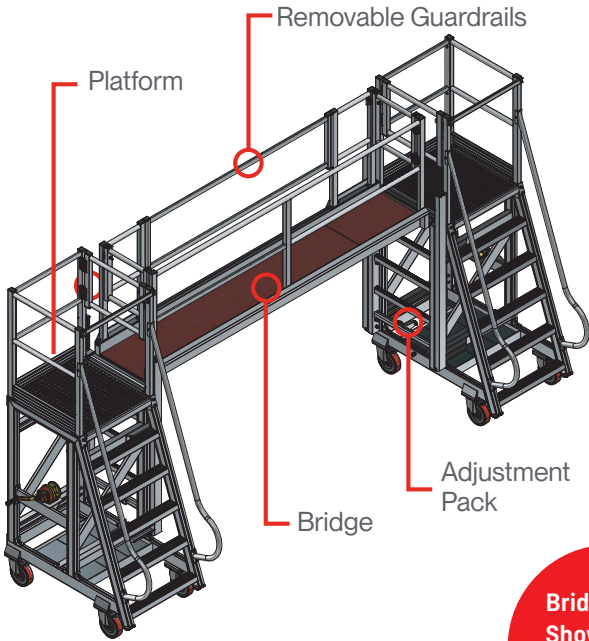

01 Stocked Solutions

SafeSmart Signature Series

BridgeDeck




Customise your BridgeDeck



Step 1: Choose Your Platform




BridgeDeck 6 Step Base Platform




BridgeDeck 9 Step Base Platform

Step 2: Choose your Height Adjustment Pack


900mm height adjustment packs can be used on both the 6 and 9 step BridgeDeck platforms, 1200mm packs can be used with the 9 step platforms only.

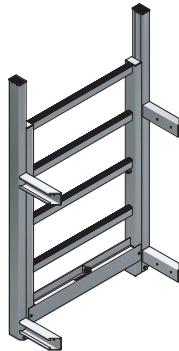


Step 3: Choose Your Bridge Length



2.5m x 0.71m Bridge



3.0m x 0.71m Bridge

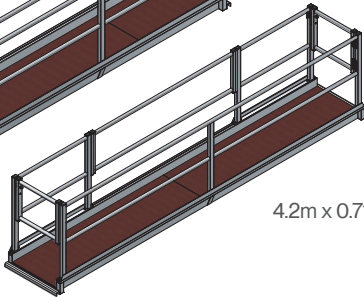

4.2m x 0.71m Bridge




SafeSmart Signature Series
SafeLoader

Code	Platform Dimensions - Description
210808	0.7mW x 1.4mH x 2.0mL Platform, Stairs one end
210784	0.7mW x 1.4mH x 4.0mL Platform, Stairs one end
210785	0.7mW x 1.4mH x 6.0mL Platform, Stairs one end

Code	Platform Dimensions - Description
210983	1.1mW x 1.4mH x 2.0mL Platform, Stairs one end
210984	1.1mW x 1.4mH x 4.0mL Platform, Stairs one end
210985	1.1mW x 1.4mH x 6.0mL Platform, Stairs one end

2.0mL 500kg SWL	4.0mL & 6.0mL 1000kg SWL	Complies with BS EN 1004:2004
------------------------------	---------------------------------------	----------------------------------

- Comes standard with crane lifting points.
- Bolt-on forklifting channels available (ref. pg 50).
- Fully cross braced aluminium frame for a rigid platform.
- Self-closing gate at entrance to platform.
- 200mm heavy-duty castors, swivel & locking.
- Originally designed for easy loading & unloading of trucks. Also compatible with a variety of heavy-duty vehicles, mining machinery and trains for loading and maintenance.

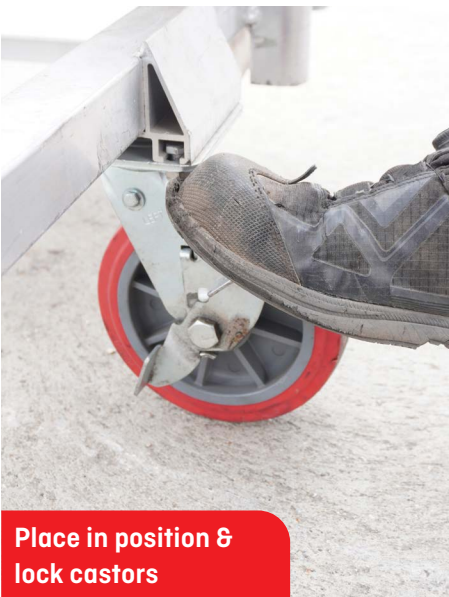

Place in position & lock castors



Enter through the gate and onto the deck



Safely load and unload

SafeLoader

A Closer Look



01 Stocked Solutions

SafeLoader Accessories

SafeLoader Castors & Adjustable Jacks

Code	Description
200699	SafeLoader Foam Filled Castor Retrofit
210500	SafeLoader Jacking Leg 1300kg 0-250mm


- Upgrade from the standard 200mm locking castors.
- Ideal for rough terrain & uneven surfaces.
- Puncture-proof solid rubber wheels.



SafeLoader Joining Kit

Code	Description
210193	SafeLoader Joining Kit

- Used to join two SafeLoaders end-to-end, to create a longer working platform.

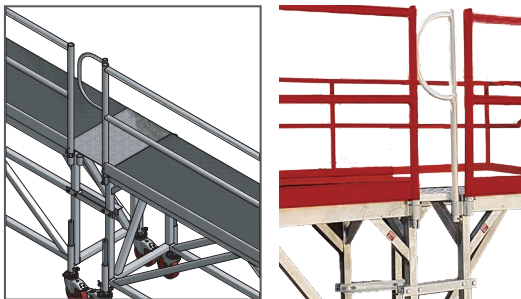

Retrofit Fork Sleeves

Code	Description
210697	Retrofit Fork Sleeves


- Add to any standard SafeLoader for forklift transport around site.
- Simply bolts to SafeLoader structure.



Infill Section

Code	Description
210665	SafeLoader Infill - End Handrail
210666	2mL SafeLoader Wheeled Infill Section
210667	4mL SafeLoader Wheeled Infill Section
210668	6mL SafeLoader Wheeled Infill Section

- SafeLoader infill sections are used to create longer working platforms.
- Connect 2x SafeLoaders (2m, 4m or 6m) with an infill section to obtain platform lengths up to 18m!

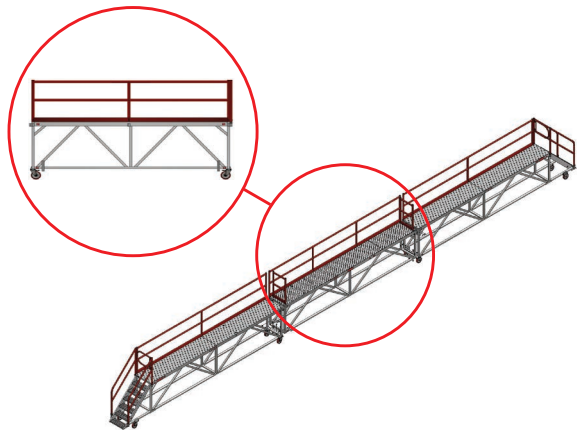

Lever Brake Kit

Code	Description
210669	Lever Brake Kit

- Single hand action lever brake.
- Avoid applying brakes to castors individually.



Need a Custom Platform?
Get In Touch!


01 Stocked Solutions

Aluminium Edge Protection Panel

Code	Description	Width	Height
210273	Aluminium Truck Edge Protection Panel 3.0mW x 3.0mH Post 2.5mH Guardrail	3.0m	3.0m
200645	Truck Edge Protection Aluminium Tube 48mm x 3.0m	3.0m	

- Flat packed for storage & transportation.
- Light & easy to use - simply roll up to truck & clip to tie rail.
- Suitable for tray heights up to 1.5m.

Complies with
BS EN 13374

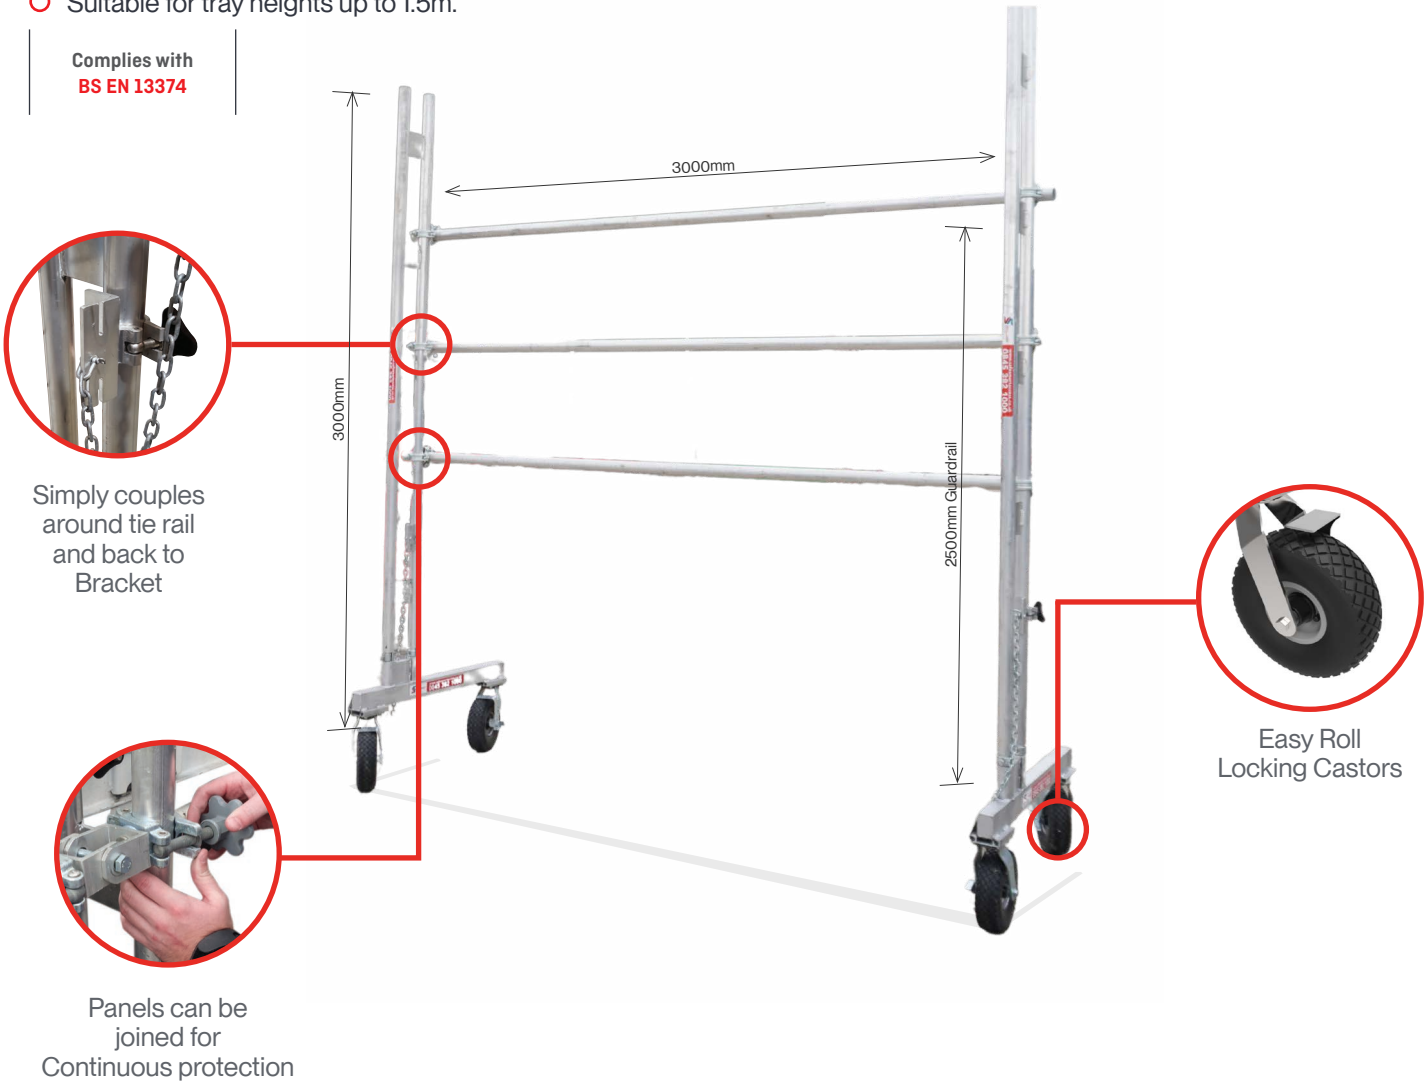

1.5, 3mL
Panels
Available

01 Stocked Solutions

Adjustable Chassis Rail Edge Protection

Code	Description
210881	Haul Truck Chassis Guardrail Frame – Telescopic. Adjusts in length from 900mmL – 1500mmL*
210880	Haul Truck Chassis Guardrail Frame – Telescopic. Adjusts in length from 1400mmL – 2400mmL*
210883	Haul Truck Chassis Guardrail Frame – Telescopic. Adjusts in length from 2000mmL – 3000mmL*
210882	Haul Truck Chassis Guardrail Frame – Telescopic. Adjusts in length from 2400mmL – 3400mmL*
210885	Haul Truck Chassis Guardrail Frame – Telescopic. Adjusts in length from 900mmL – 1500mmL**
210884	Haul Truck Chassis Guardrail Frame – Telescopic. Adjusts in length from 1400mmL – 2400mmL**
210887	Haul Truck Chassis Guardrail Frame – Telescopic. Adjusts in length from 2000mmL – 3000mmL**
210886	Haul Truck Chassis Guardrail Frame – Telescopic. Adjusts in length from 2400mmL – 3400mmL**

* Suits Chassis widths between 190mm - 235mm, ** Suits Chassis widths between 290mm - 326mm

- Compatible with any haul truck and can be fitted on a square or rolled chassis.
 - Adjustable from 0.9mL to 3.4mL giving it the flexibility to fit any workspace.
 - The clamping system provides a positive lock onto the chassis frame, rather than merely slipping over the chassis as other systems do.
- Eliminates the need for a separate chassis rail kit for each truck.
 - Easily and quickly adjusted using hand tightening couplers.



01 Stocked Solutions

AdjustaStairs
Models Available

“SafeSmart AdjustaStairs are very convenient, very light to use, and very durable. We use these right across the site, SafeSmart all the way!”


— Scaffold Manager, NI1 Construction

600mmW Aluminium (3-21 Steps)

Code	Steps	Height Range	Lying Length	Weight
210818	3	0.49m - 0.67m	0.8m	27kg
210813	6	0.97m - 1.33m	1.8m	41kg
210814	9	1.43m - 2.0m	2.7m	57kg
210815	12	1.91m - 2.67m	3.7m	74kg
210816	15	2.39m - 3.33m^	4.8m	102kg
210817	18	2.87m - 4.0m^	5.4m	119kg
210818	21	3.3m - 4.6m^	6.2m	138kg

2.5kPa
SWL

^Stairs include trussed stringer.

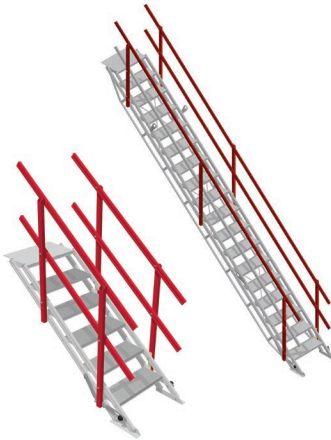


1200mmW Aluminium (3-18 Steps)

Code	Steps	Height Range	Lying Length	Weight
210821	3	0.49m - 0.67m	0.8m	37kg
210822	6	0.97m - 1.33m	1.8m	59kg
210823	9	1.43m - 2.0m	2.7m	84kg
210824	12	1.91m - 2.67m^	3.7m	108kg
210825*	15	2.39m - 3.33m^	4.8m	153kg
210826*	18	2.87m - 4.0m^	5.4m	168kg

2.5kPa
SWL

^Stairs include trussed stringer.

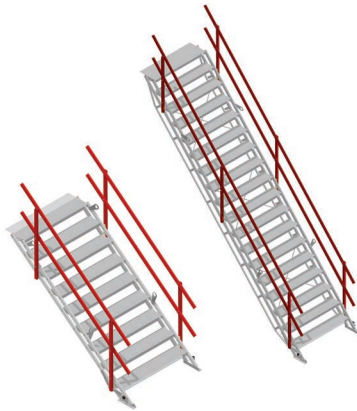

01 Stocked Solutions

SmartStairs

Steel Modular Stair System

- Modular box system for stretcher stair access/construction access - join boxes together to create your desired access height required on-site.
- Can be installed by competent personnel- no scaffolders required.
- Fully crane-liftable stair system.

Steel SmartStairs

- Steel SmartStairs come equipped with 1.2mW Stair Treads (Construction stair modules available).
- Complete with easy-to-use sliding bolt pin.
- Designed to hang up to 40m between supports.
- Designed to freestand up to 18m.

Aluminium SmartStairs

- Aluminium structure. Huge weight saving for design intricate environments over against using steel.
- High strength light-weight aluminium structure.

Aluminium Smartstairs - Made To Order


2.3mH Stretcher Stair Module Freestanding Series*

Code	Description
221007	Steel Stretcher Stair Module - 2.3mH x 2.86mW x 4.0mL*

*The 2.3mH Module works with the SmartBridge system (see page 74)

Dimension	Measurement
Height (H)	2300mm
Length (L)	4030mm
Width (W)	2770mm
Stair Angle (SA)	45°
Stair Width (W)	1220mm
Exit Width (EW)	1340mm

3.0mH
Also Available
Upon Request

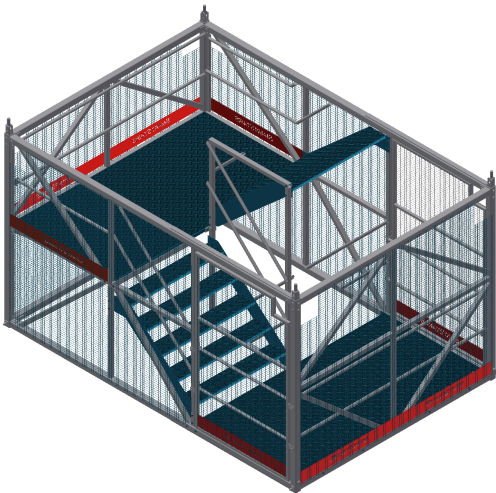


2.5kPa
SWL

Complies with
BS EN ISO 14122

2.3mH Construction Stair Module

Code	Description
221005	Steel Construction Stair Module - 2.3mH x 1.57mW x 2.8mL

Dimension	Measurement
Height (H)	2300mm
Length (L)	2830mm
Width (W)	1570mm
Stair Angle (SA)	45°
Stair Width (W)	620mm
Exit Width (EW)	740mm

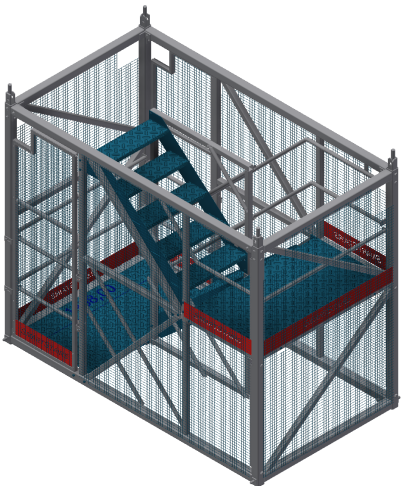

2.5kPa
SWL

Complies with
BS EN ISO 14122

BRIDGING GAPS

Pair your SmartStairs system with SmartBridge

01 Stocked Solutions

SmartStairs Steel Stair Modules


2.3mH Saferise Ladder Module

Code	Description
221063	Steel Ladder Module - 2.3mH x 0.9mW x 1.82mL

Dimension	Measurement
Height (H)	2300mm
Length (L)	1820mm
Width (W)	900mm
Exit Width (EW)	660mm
Exit Height (EH)	1900mm

2.5kPa
SWL

Complies with
BS EN ISO 14122

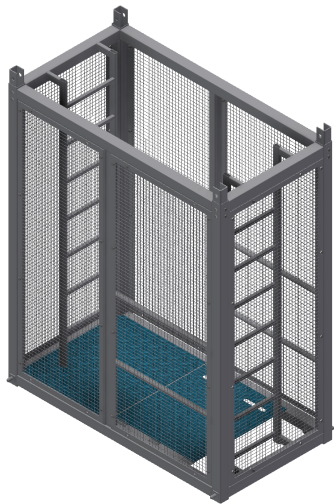

SmartStairs

A Closer Look

“SafeSmart SmartStairs are a game-changer - just being able to lift six stacks of access towers in one go, with only half the footprint of traditional scaffold stretcher stairs!”
— General Foreman, John Holland



Sliding Pin Connection




Certified Crane Lifting Points




25mm x 25mm Mesh Encapsulation



Rated Harness Point

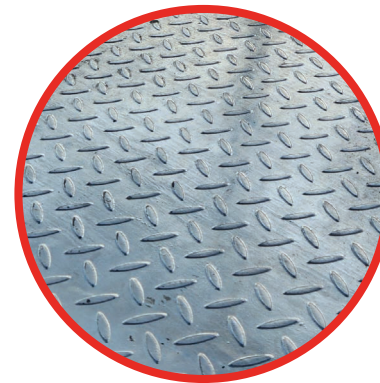

Anti-Slip Checker Plate Flooring

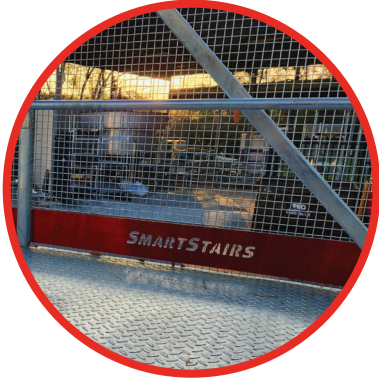

Integral Toeboards

01 Stocked Solutions

Modular StepOver Components

Choose your step angle, height and bridge length to build a premium grade step over platform.

Built tough with features such as a box section high tensile aluminium frame, and perforated plate deck surfaces. Supplied disassembled for ease of installation in tight locations.

70° Ladder Range

Code	Type	Clearance Height	Platform Height
210700	2 Step	445mm	566mm
210701	3 Step	727mm	848mm
210702	4 Step	1003mm	1125mm
210703	5 Step	1291mm	1412mm
210704	6 Step	1573mm	1694mm
210646	7 Step	1854mm	1976mm
210647	8 Step	2136mm	2258mm
210648	9 Step	2418mm	2540mm



- Standard step height is 280mm, standard angle of ladder slope is 70-degrees, standard ladder width is 800mm.
- Standard ladder has rubber feet which can be changed for retrofit permanent feet plates which will attach to the support surface.
- Includes two ladder handrails which attach to the ladder stile and the main platform handrail posts.

225kg
SWL

Complies with
BS EN 131

5 Year
Warranty

45° Stair Range

Code	Type	Clearance Height	Platform Height
210736	2 Step	445mm	567mm
210737	3 Step	727mm	849mm
210738	4 Step	1009mm	1120mm
210739	5 Step	1070mm	1120mm
210740	6 Step	1201mm	1316mm
210741	7 Step	1291mm	1406mm
210742	8 Step	1573mm	1694mm
210640	9 Step	1854mm	1976mm
210641	10 Step	2136mm	2258mm
210642	11 Step	2418mm	2540mm
210643	StepOver Stair Brace to suit 1970mmH Platform with 45-degree stairs		
210644	StepOver Stair Brace to suit 2200mmH Platform with 45-degree stairs		
210645	StepOver Stair Brace to suit 2550mmH Platform with 45-degree stairs		

- 220mm deep stair treads for comfortable access to the platform.
- Stair treads are ridged for safety and grip in all site conditions.
- Available as standard with bolt-down feet.




01 Stocked Solutions


Modular StepOver Components

Platform Bridge Range

Code	Size
210143	0.6mL x 0.8mW
210706	1.0mL x 0.8mW
210707	1.5mL x 0.8mW
210708	2.0mL x 0.8mW
210786	3.0mL x 0.8mW
210140	4.0mL x 0.8mW
210141	6.0mL x 0.8mW

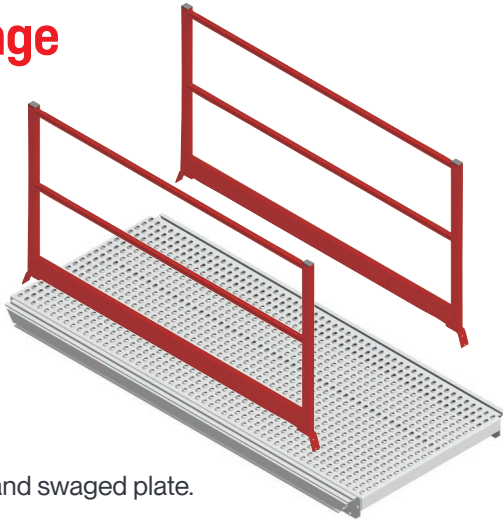


- The platform decks are perforated and swaged plate.
- Platforms bolt to a step ladder each end.
- Ladder sizes are interchangeable.
- The handrail set includes two frames, one for each side, which are bolted to the platform.
- There is a guardrail, midrail and toeboard for each frame.
- Can be used independently as an access bridge.

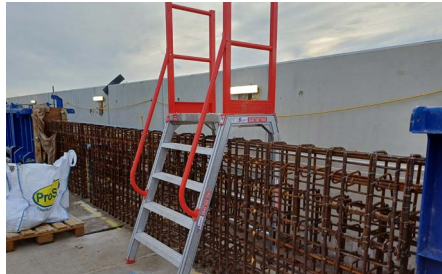

Vertical Ladder Range

Code	Steps	Clearance Height	Platform Height
210731	2	445mm	566mm
210732	3	727mm	848mm
210733	4	1009mm	1130mm
210734	5	1297mm	1412mm
210735	6	1572mm	1694mm
210649	7	1854mm	1976mm
210650	8	2136mm	2258mm
210651	9	2418mm	2540mm

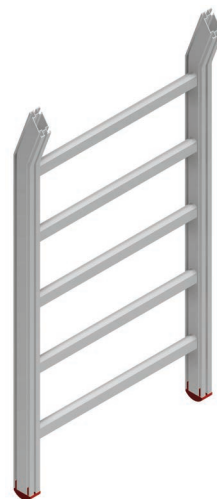

- Width of the ladder is 800mm.
- Vertical ladder step height is 280mm. Angle of slope is 90-degrees.
- Rubber feet can be changed for retrofit permanent feet plates which will attach to the support surface.
- The top of the vertical ladder stiles are angled to match the standard platform bridge.



SCAN CODE
TO VIEW
VIDEO

01 Stocked Solutions

Modular StepOver Platforms 1.2mW - Components


Choose your step angle, height and bridge length to build a premium grade step over platform.

Built tough with features such as a box section high tensile aluminium frame, and perforated plate deck surfaces. Supplied disassembled for ease of installation in tight locations.

2.5kPa WLL	Complies with BS EN 131	Only Available with 45-degree Access Stair	5 Year Warranty
---------------	----------------------------	---	--------------------

Platform Bridge 1.2mW Range


Code	Description
240020	Stepover Platform Bridge 0.6mL x 1.2mW
240021	Stepover Platform Bridge 1.0mL x 1.2mW
240022	Stepover Platform Bridge 1.5mL x 1.2mW
240023	Stepover Platform Bridge 2.0mL x 1.2mW
240024	Stepover Platform Bridge 3.0mL x 1.2mW

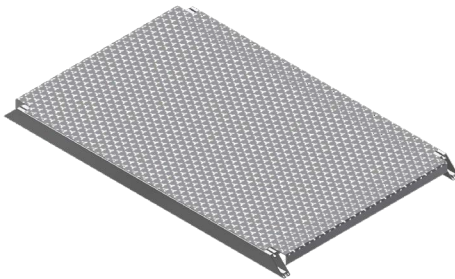

- The platform decks are perforated and swaged plate.
- Platforms bolt to a step ladder at each end.
- Can be used independently as an access bridge.

Platform Bridge Handrails 1.2mW Range - Standard


Code	Description	Handrail Height
240025	Platform Handrail Pair Only 0.6mL x 1.2mW	1000mm
240026	Platform Handrail Pair Only 1.0mL x 1.2mW	1000mm
240027	Platform Handrail Pair Only 1.5mL x 1.2mW	1000mm
240028	Platform Handrail Pair Only 2.0mL x 1.2mW	1000mm
240029	Platform Handrail Pair Only 3.0mL x 1.2mW	1000mm

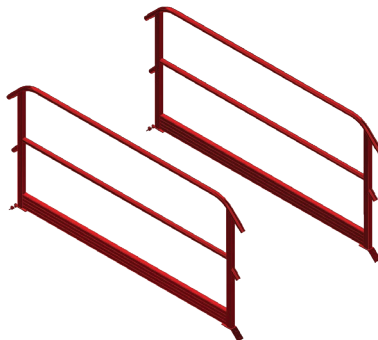

- Ladder sizes are interchangeable.
- The handrail set includes two frames, one for each side, which are bolted to the platform.
- There is a guardrail, midrail and toeboard for each frame.

Platform Bridge Handrails 1.2mW Range - Stretcher

Code	Description	Handrail Height
240030	Platform Handrail Pair Only 0.6mL x 1.2mW (Stretcher Height)	1400mm
240031	Platform Handrail Pair Only 1.0mL x 1.2mW (Stretcher Height)	1400mm
240032	Platform Handrail Pair Only 1.5mL x 1.2mW (Stretcher Height)	1400mm
240033	Platform Handrail Pair Only 2.0mL x 1.2mW (Stretcher Height)	1400mm
240034	Platform Handrail Pair Only 3.0mL x 1.2mW (Stretcher Height)	1400mm



01 Stocked Solutions

Modular StepOver Platforms 1.2mW - Components

45° Stair 1.2mW Range

Code	Description	Platform Height
240001	StepOver 2 Step Stair Only - 1.2mW	450mm
240002	StepOver 3 Step Stair Only - 1.2mW	675mm
240003	StepOver 4 Step Stair Only - 1.2mW	900mm
240004	StepOver 5 Step Stair Only - 1.2mW	1125mm
240005	StepOver 6 Step Stair Only - 1.2mW	1350mm
240006	StepOver 7 Step Stair Only - 1.2mW	1575mm
240007	StepOver 8 Step Stair Only - 1.2mW	1800mm
240008	StepOver 9 Step Stair Only - 1.2mW	2025mm
240009	StepOver 10 Step Stair Only - 1.2mW	2250mm
240010	StepOver 11 Step Stair Only - 1.2mW	2475mm



- 220mm deep stair treads for comfortable access to the platform.
- Stair treads are ridged for safety and grip in all site conditions.
- Available as standard with bolt-down feet.


45° Handrails 1.2mW Range - Standard

Code	Description	Platform Height
240011	StepOver 2 Step Handrail Pair Only - 1.2mW	1000mm
240012	StepOver 3 Step Handrail Pair Only - 1.2mW	1000mm
240013	StepOver 4 Step Handrail Pair Only - 1.2mW	1000mm
240014	StepOver 5 Step Handrail Pair Only - 1.2mW	1000mm
240015	StepOver 6 Step Handrail Pair Only - 1.2mW	1000mm
240016	StepOver 7 Step Handrail Pair Only - 1.2mW	1000mm
240017	StepOver 8 Step Handrail Pair Only - 1.2mW	1000mm
240018	StepOver 9 Step Handrail Pair Only - 1.2mW	1000mm
240019	StepOver 10 Step Handrail Pair Only - 1.2mW	1000mm
240035	StepOver 11 Step Handrail Pair Only - 1.2mW	1000mm



45° Handrails 1.2mW Range - Stretcher


Code	Description	Platform Height
240036	StepOver 2 Step Handrail Pair Only (Stretcher Height) - 1.2mW	1400mm
240037	StepOver 2 Step Handrail Pair Only (Stretcher Height) - 1.2mW	1400mm
240038	StepOver 2 Step Handrail Pair Only (Stretcher Height) - 1.2mW	1400mm
240039	StepOver 2 Step Handrail Pair Only (Stretcher Height) - 1.2mW	1400mm
240040	StepOver 2 Step Handrail Pair Only (Stretcher Height) - 1.2mW	1400mm
240041	StepOver 2 Step Handrail Pair Only (Stretcher Height) - 1.2mW	1400mm
240042	StepOver 2 Step Handrail Pair Only (Stretcher Height) - 1.2mW	1400mm
240043	StepOver 2 Step Handrail Pair Only (Stretcher Height) - 1.2mW	1400mm
240044	StepOver 2 Step Handrail Pair Only (Stretcher Height) - 1.2mW	1400mm
240045	StepOver 2 Step Handrail Pair Only (Stretcher Height) - 1.2mW	1400mm

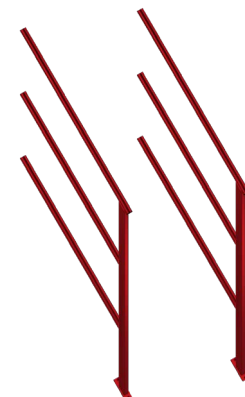


01 Stocked Solutions

Modular StepOver Platforms 0.8mW - Accessories


Code	Description
210142	Modular Short Leg (ea.)
210705	Permanent Base Plate Set to suit 70° Ladder. Set of two brackets.
210709	Permanent Base Plate set to suit Vertical Ladder (Set of two)
210144	Lifting Lug Angled - incl. Hardware (ea.)
210630	Modular Stepover Retrofit Wheel Kit Bracket
230235	Heavy-Duty Adjustable Height Castor-200mm, 700kg WLL
210681	Fixed Bolt-in End Panel (1.0mH x 0.9mW)
210899	Batwing Gates 400mmW to suit Modular StepOver 900mmW
210788	70° Ladder Brace
210789	90° Ladder Brace




210142
Modular Short Leg



210705
Permanent Base Plate Set




210709
Permanent Base Plate Set
(Vertical Ladder)



210144
Lifting Lug Angled
(Includes Hardware)




210899
Batwing Gates



210788
70° Ladder Brace




210789
90° Ladder Brace

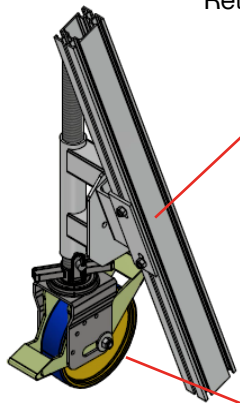

210630
Retrofit Wheel Kit
Bracket

230235
Heavy-duty Adjustable
Height Castor



210681
Fixed Bolt-in
End Panel



Section 02

Open Cut Solutions

Haul Truck Access

Truck Chassis Access Platform	41
Hoist Cylinder Access Platform	43
Air Filter Access Platform	44
Lower Radiator Access Platform	45
Tyre Fitters Platform	46
Truck Bumper/TrayPin Access Platform	47
Tray Pin & Line Boring Access Platform	48
Engine Bay Access Platform	49
Tray Access Platform	50

Dozer Access

Extended Side Cantilever Stand	53
D10/D11 Dozer End Cantilever Stand	54
D10/D11 Side Cantilever Stand	55

D10/D11 Dozer Track Mounted Guardrail	56
---------------------------------------	----

Grader Access

Grader Access Platform	57
------------------------	----

Loader Access

Tilt Cylinder Access	58
Boom Hose Access Platform	59
Strut Access Platform	60
Bucket Access Platform	61
Industry Story - Bowen Basin Workshop	62

Haul Truck Access





Truck Chassis Access Platform

- Cantilever Access Platform provides safe access to the truck chassis, over the hydraulic box and fuel tank
- 45° stair access allows easy movement of tools and equipment into the chassis area.
- Optional wind-down jacks for added stability and levelling.
- Available with Batwing Gates for improved safety and usability.
- Optional bolt-on storage decks for chassis guardrails.


225kg
WLL

Chassis Access Platforms available for all CAT, Liebherr, Hitachi, Komatsu and other trucks.

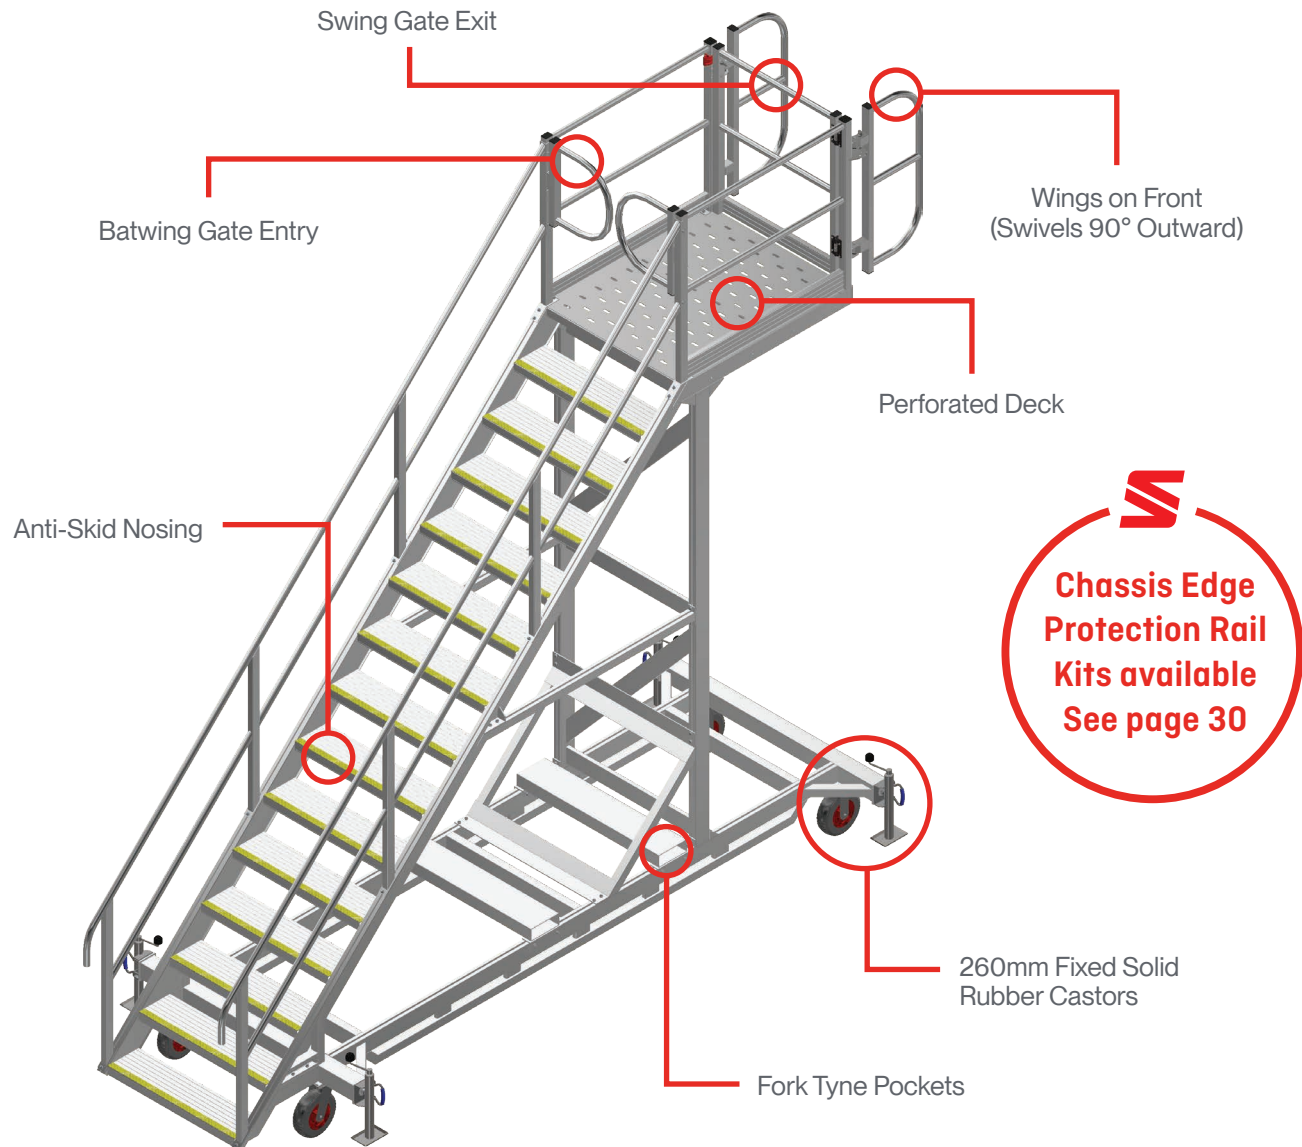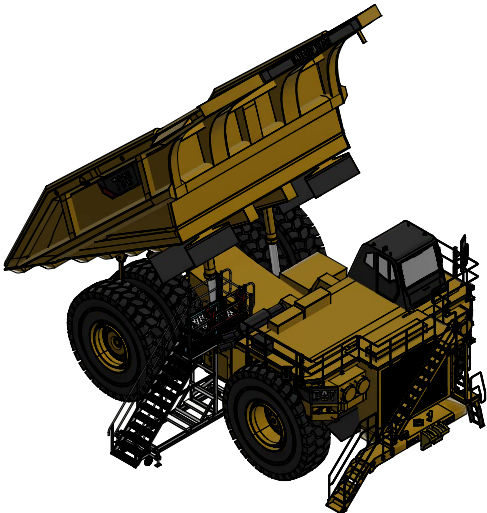


02 Open Cut

Haul Truck Access

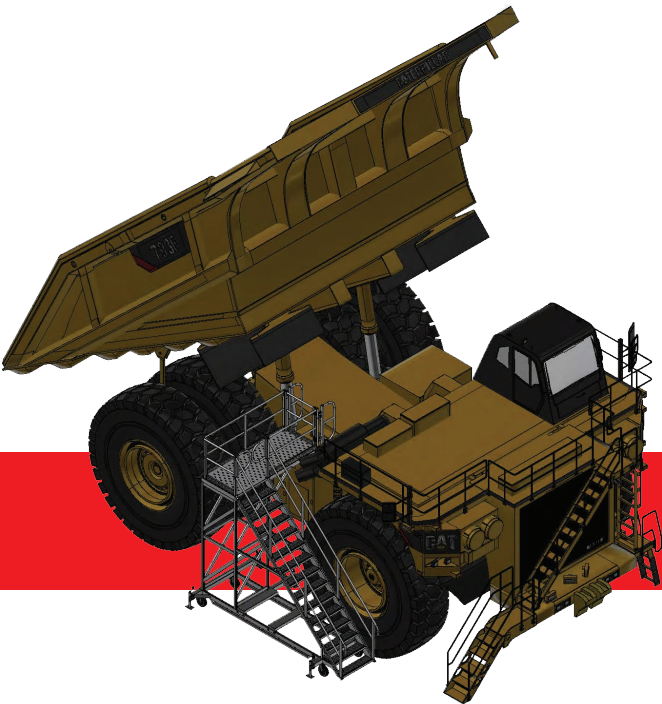

Side Cantilever Design
For Tighter Bays

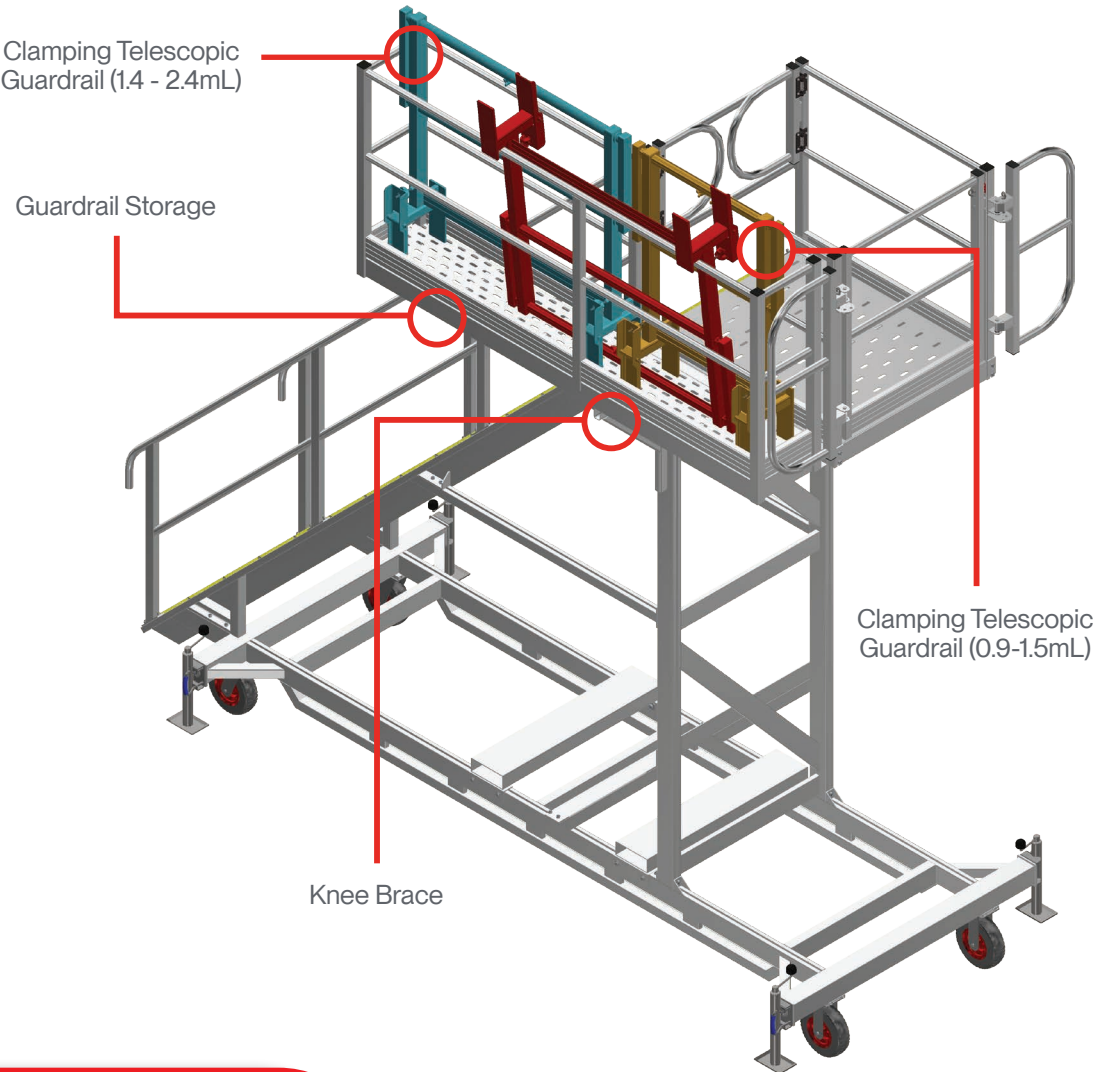



02 Open Cut

Hoist Cylinder Access Platform

- Dimensions: 1.4mL x 0.5mW x 2.3mH (length includes 1.0mL clear cantilever).
- Provides access between hydraulic box/fuel tank and tyre for servicing hoist cylinders.
- 45° stairway access with griptread extrusion steps and anti-skid nosings.
- Handrail and midrail on both sides, with swing gate at entry point.
- 1.0m clear cantilever for full reach into the work area.
- Heavy-duty 200mm castors for mobility.
- Counterweights included for added stability.
- Fork channels for easy relocation.

225kg
WLL

11-Step Hoist Cylinder Access Platform
(Komatsu 830e & 930e Design)

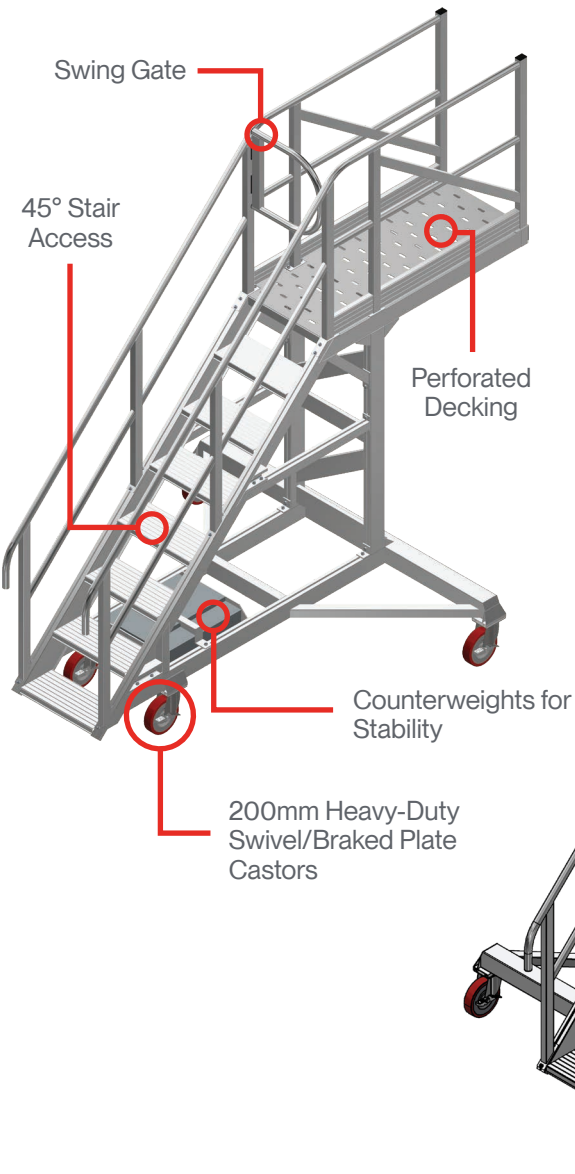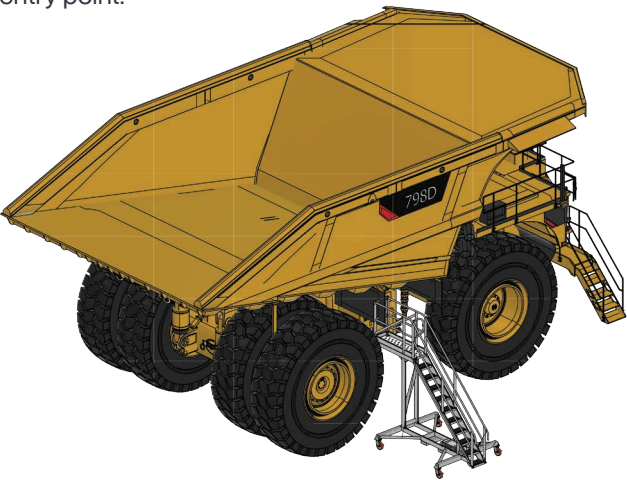

02 Open Cut

Air Filter Access Platform

- Dimensions: 1.4mL x 1.4mW x 1.7mH.
- Length includes 0.7m supported cantilever to the RHS.
- Guardrail, midrail, and toeboard frames on all sides except leading edge
- 0.6m wide parallel stairway/landing access at 45° slope.
- Griptread extrusion steps with anti-skid nosings for safe footing.
- Handrail and midrail on both sides with swing gate at entry point.



225kg
WLL




02 Open Cut

Lower Radiator Access Platform

- Provides safe radiator access for CAT, Liebherr, Hitachi, and Komatsu trucks.
- 45° stair access to the platform.
- Self-closing gate for safe platform entry.
- Fork tyne pockets for easy relocation.
- Heavy-duty castors and wind-down jacks for stability.

225kg
WLL

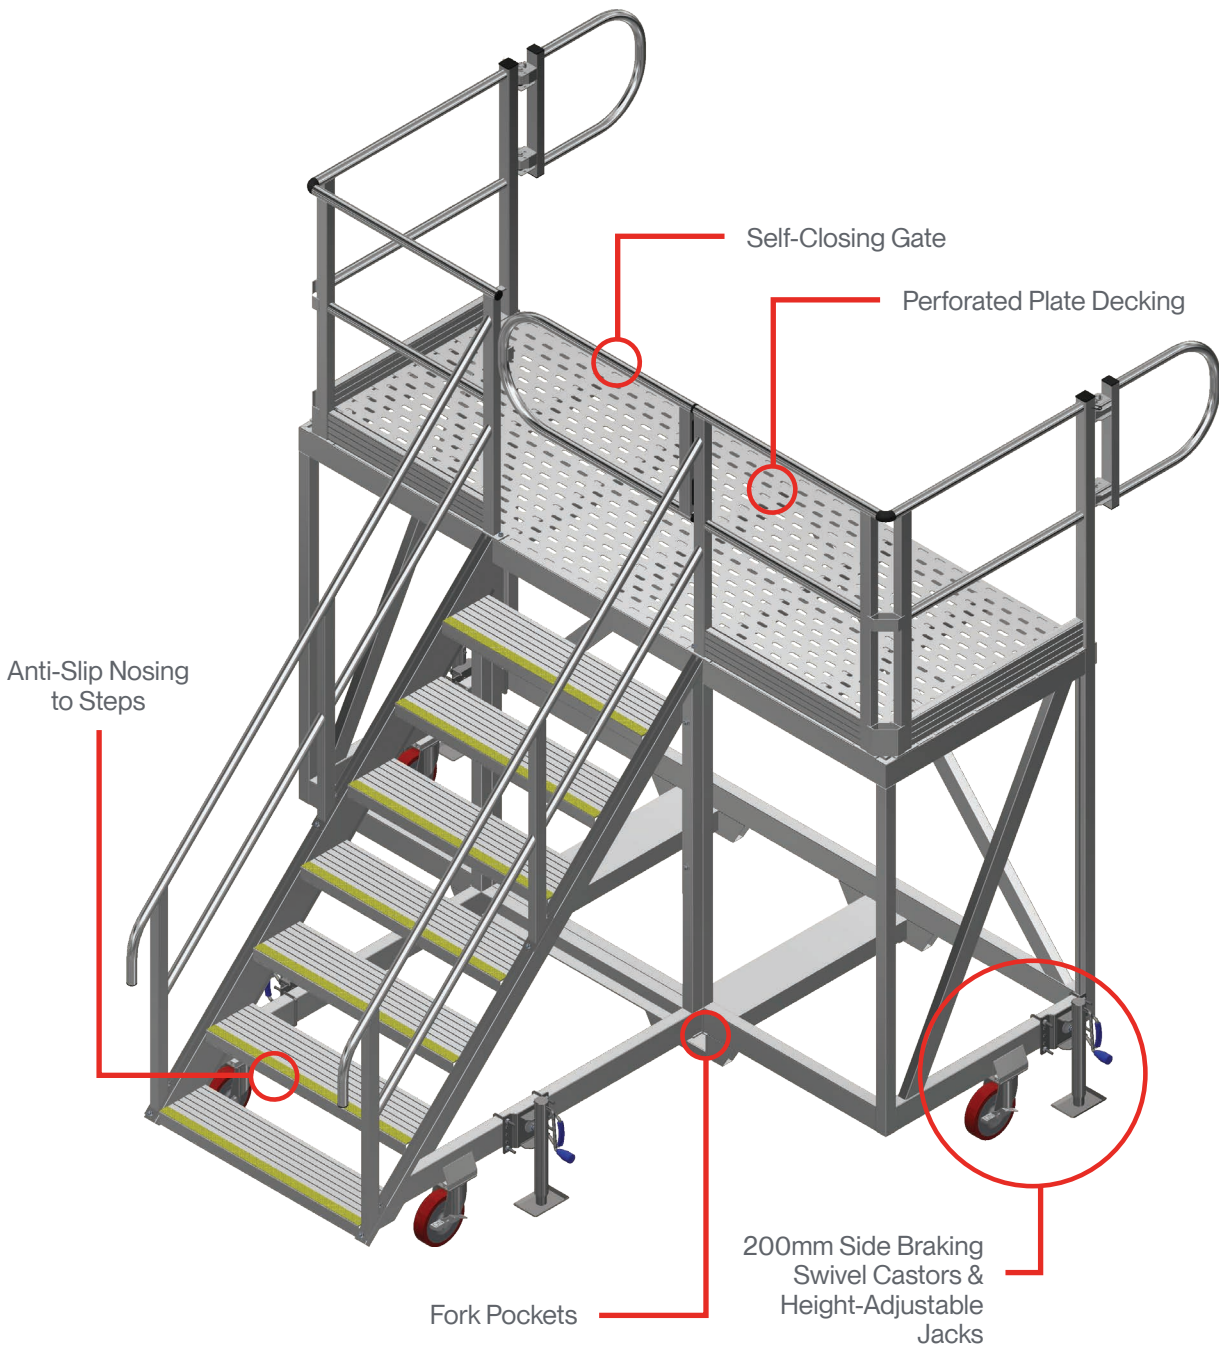


02 Open Cut Tyre Fitters Platform

- Designed to provide safe access for 1–2 users when working on or changing tyres.
- Dual stairways at both ends allow entry from either side of the work bay.
- Perforated platform surface enables drainage of grease and oil, maintaining a safer work area.
- Equipped with large solid rubber wheels for easy mobility on gravel or uneven surfaces.
- Fitted with a lever brake for quick and secure setup prior to use.

225kg
WLL


Pneumatic Drill
Gantry also
Available

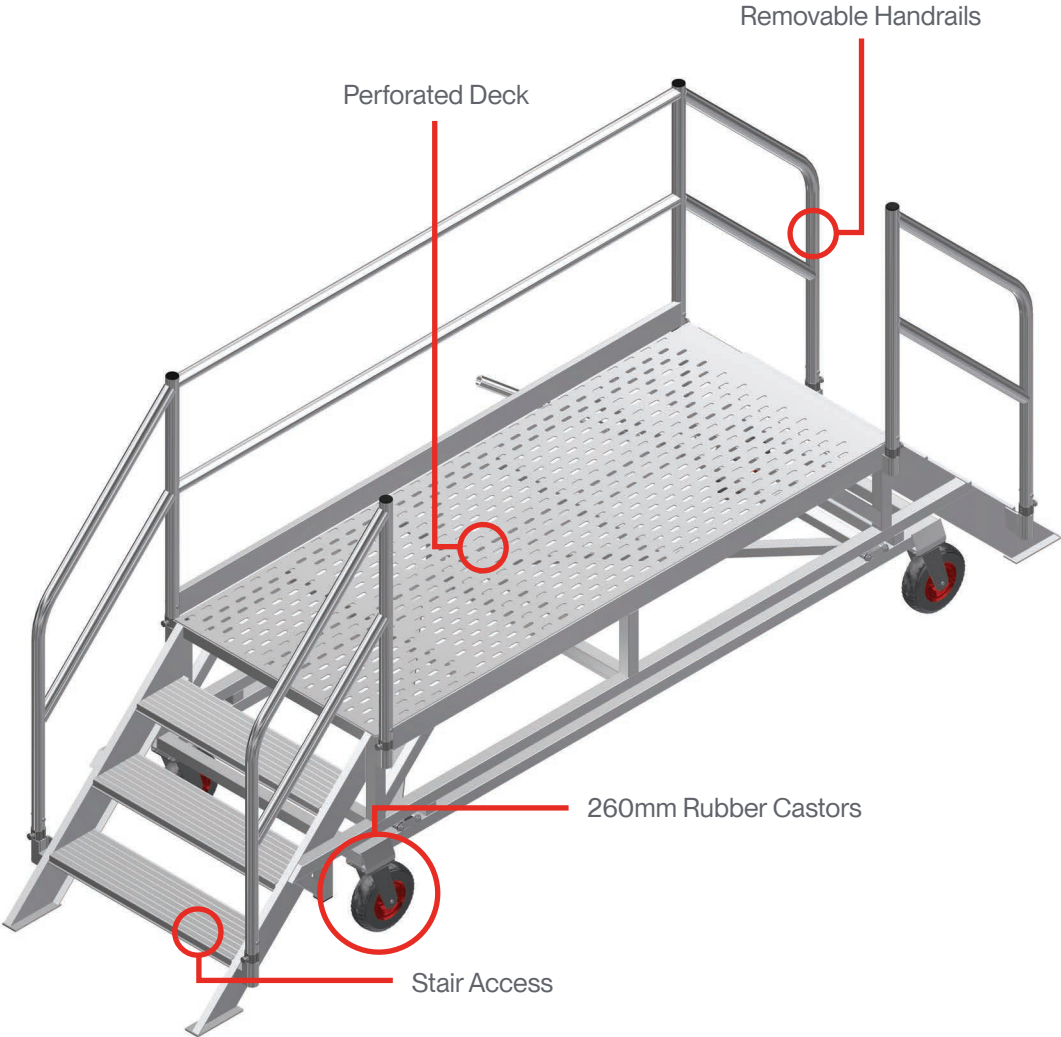

02 Open Cut Truck Bumper/Tray Pin Access Platform

- Provides quick and convenient mobile stair access to the truck bumper.
- Ideal for in-service inspections and maintenance.
- 45° stair angle designed to allow safe carrying of tools and equipment onto the truck.
- Enables easy access to tray pins, radar screens, and other service points.
- Available in a range of sizes to suit all truck types.

225kg
WLL

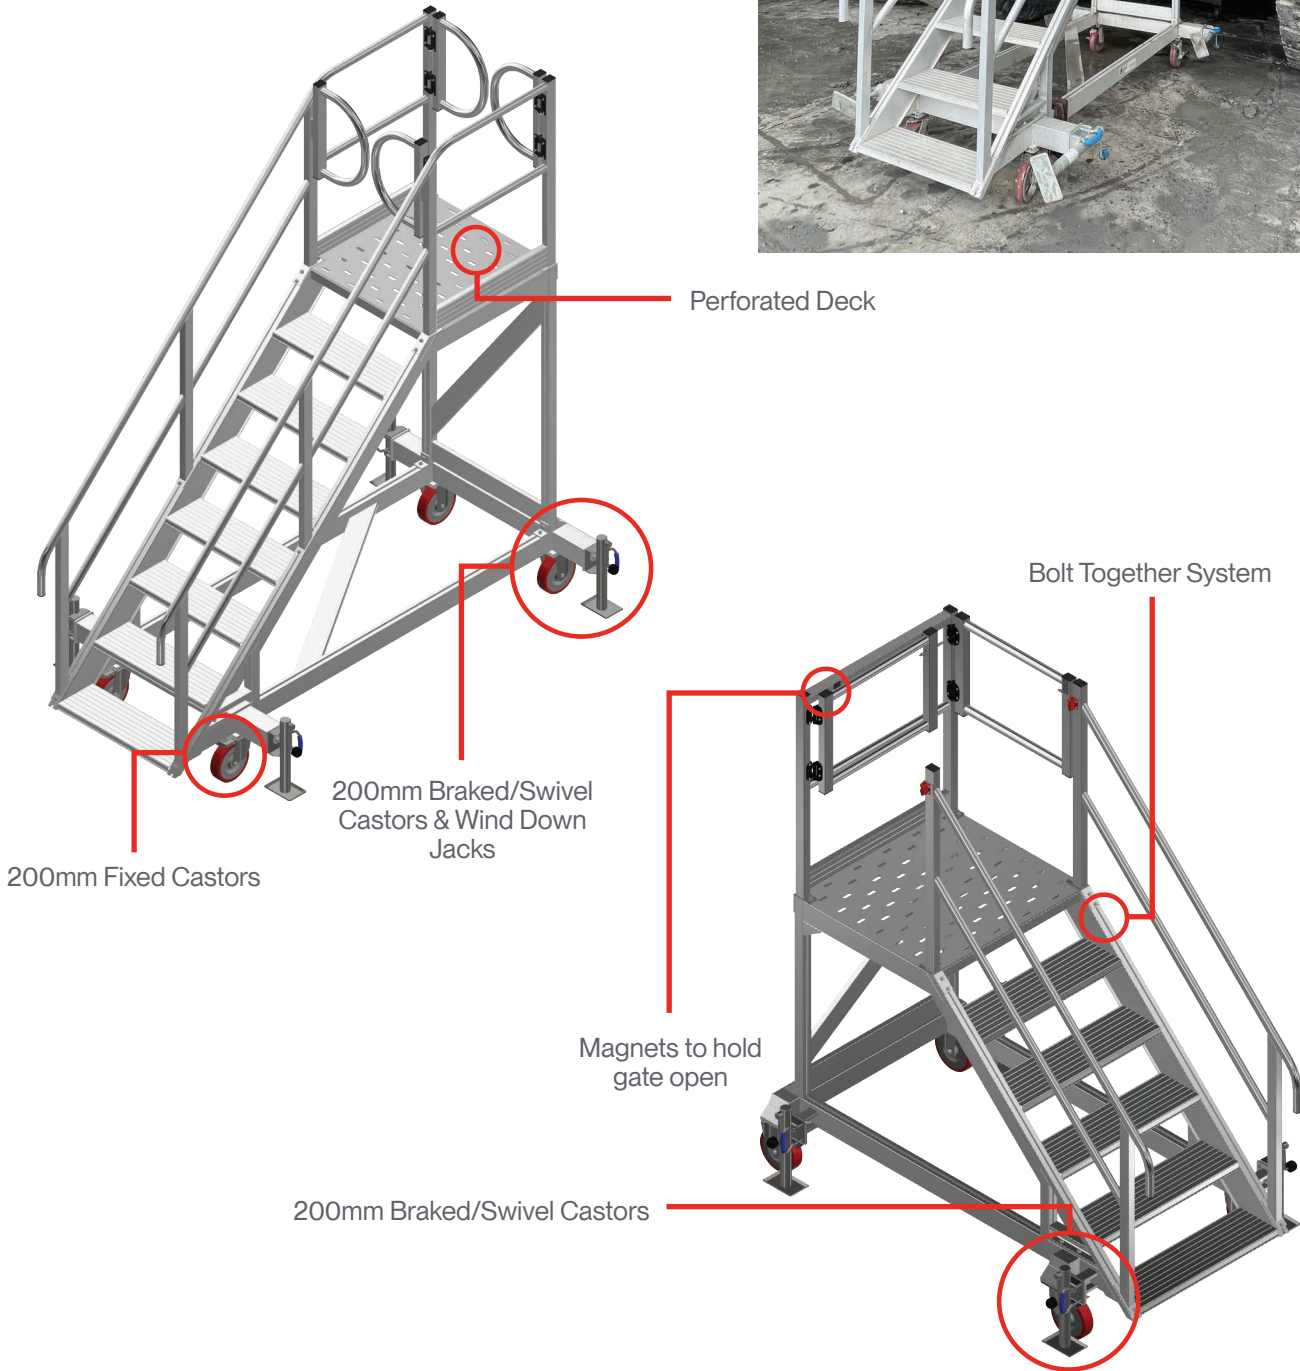


02 Open Cut

Tray Pin & Line Boring Access Platform

- Platform dimensions: 1.2mL x 2.45mW x 1.35mH.
- Stairway access with 45° slope with griptread extrusion steps and anti-skid nosings for enhanced safety.
- Handrail and midrail on both sides for secure access.
- Guardrail, midrail, and toeboard frames on all sides for comprehensive fall protection.
- Leading edge features three removable sections, each 0.8mW, for flexible access.



225kg
WLL

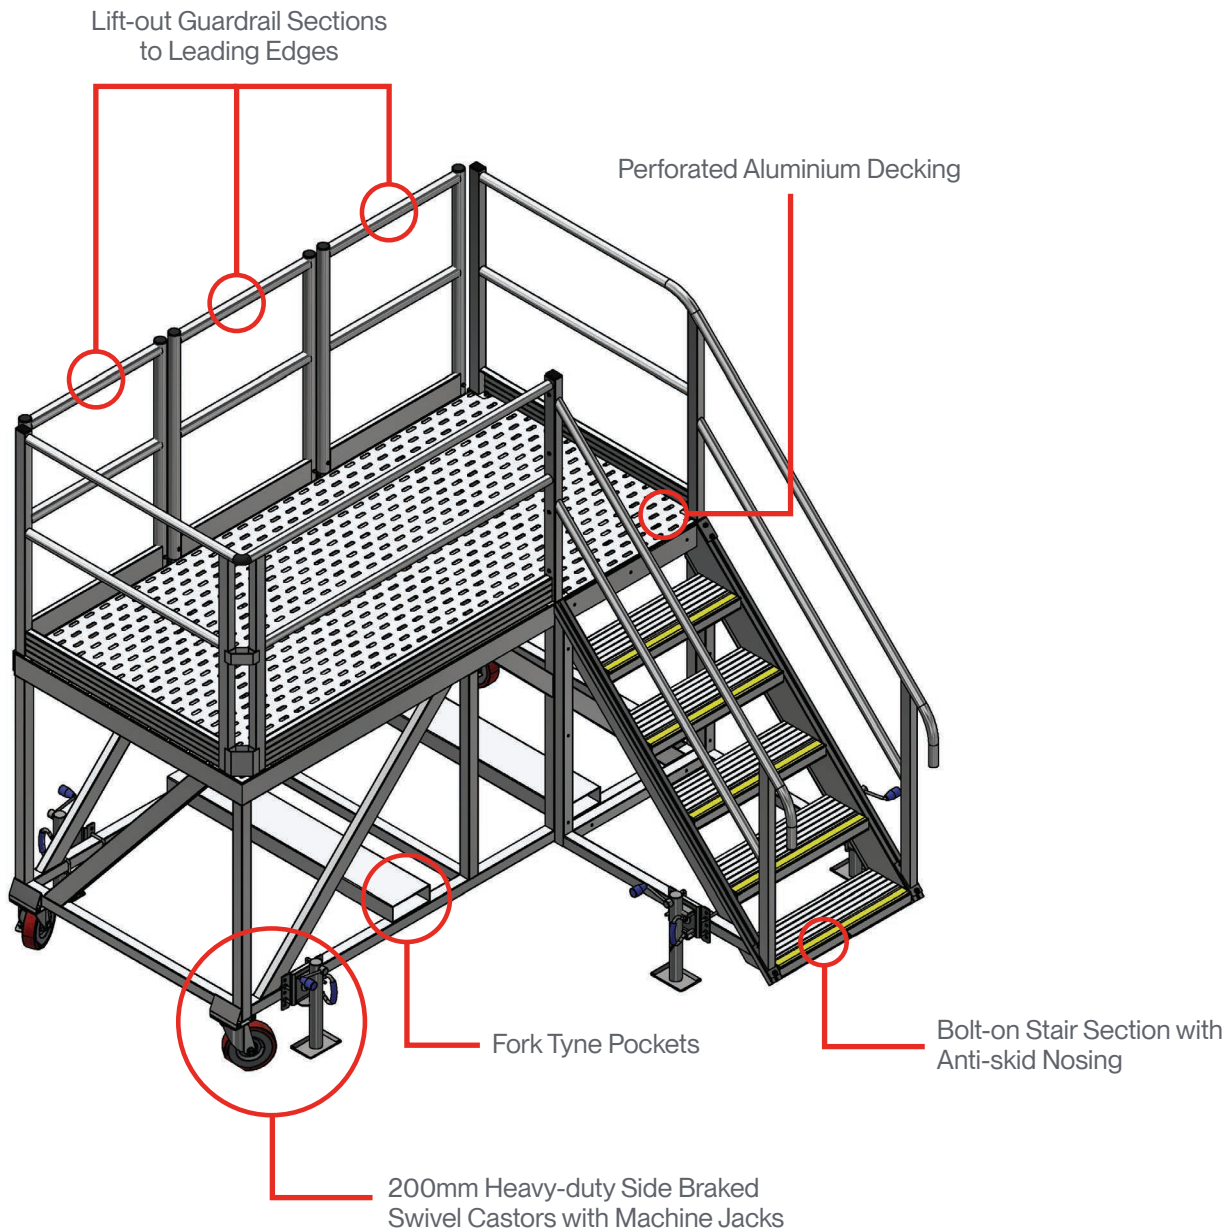


02 Open Cut

Engine Bay Access Platform (Suits Komatsu 930e)

- Platform dimensions: 1.0mL x 0.55mW x 2.0mH
- Stairway access at a 45° slope, with griptread extrusion steps and anti-skid nosings.
- Handrail and midrail on each side, with a swing gate at the point of entry.
- Guardrail, midrail, and toeboard frames on each side, with an open leading edge.
- Perforated and swaged decking material.

225kg
WLL

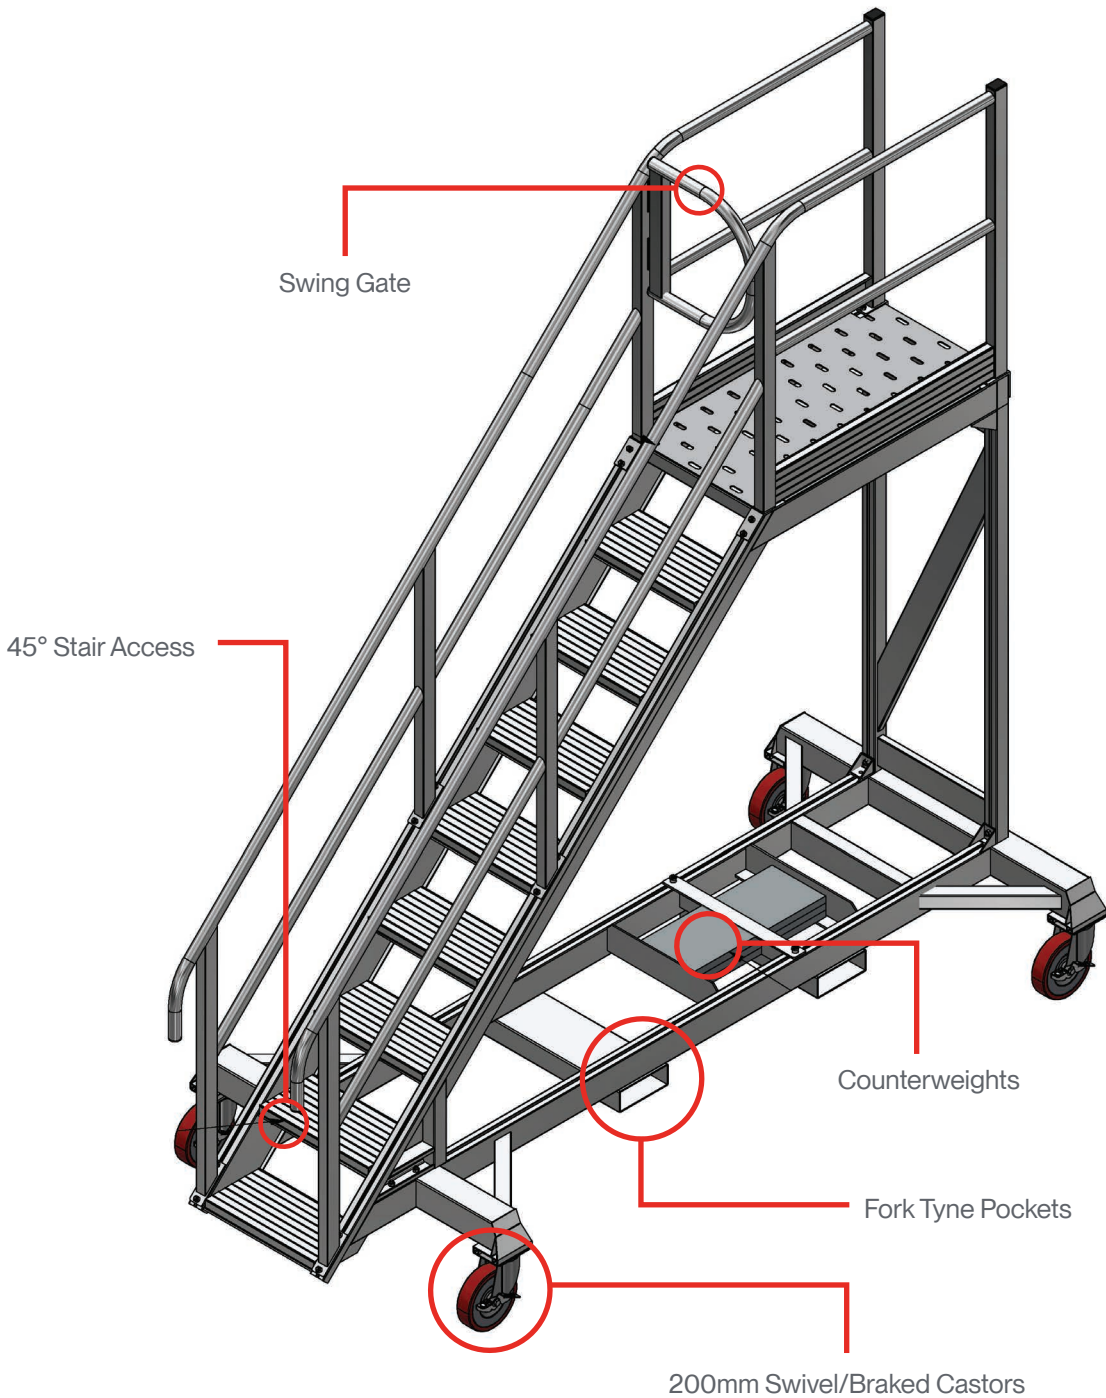


02 Open Cut Tray Access Platform

- Platform dimensions: 2.145mL x 2.0mW x 5.0mH (minimum), 6.0mH (maximum).
- Length includes a 1.4mL clear cantilever.
- Height adjustment via winch, cable, and pulley system with spring pins that auto-release as the platform is raised and auto-lock as it is lowered.
- Fixed stairway access to 2.6mH mid-landing & self-levelling stairway access to height adjustable section, maximum 45° slope, with griptread extrusion steps with anti-skid nosings.
- Guardrail, midrail, and toeboard frames to all sides of the platform and mid-landing, except the leading edge.
- Hinging wings on either side of the platform provide edge protection to the rear of the tray (8.4m overall width).
- Wings fold back along each side of the platform when not in use.

500kg
WLL




02 Open Cut Tray Access Platform - A Closer Look

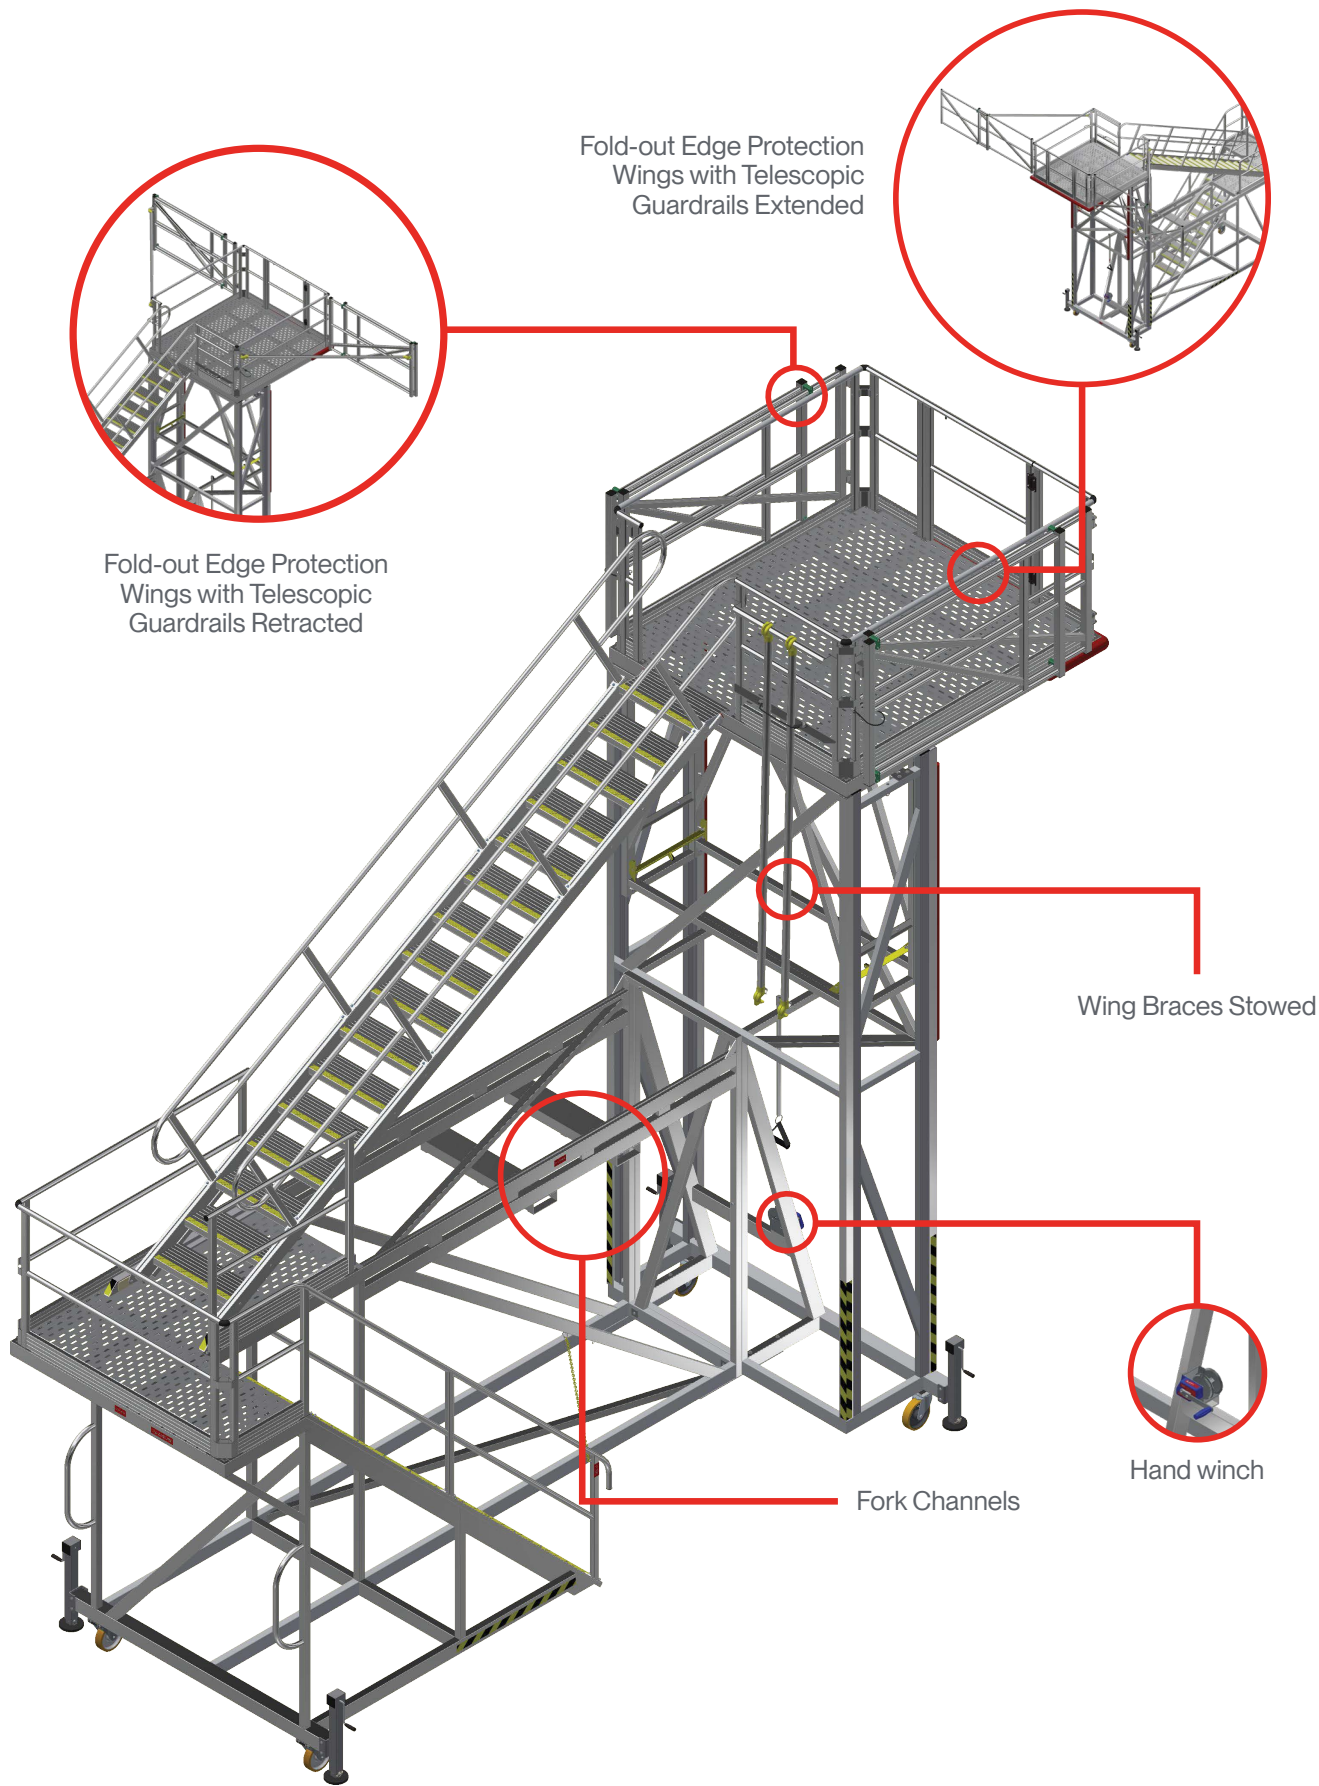

02 Open Cut

Dozer Access

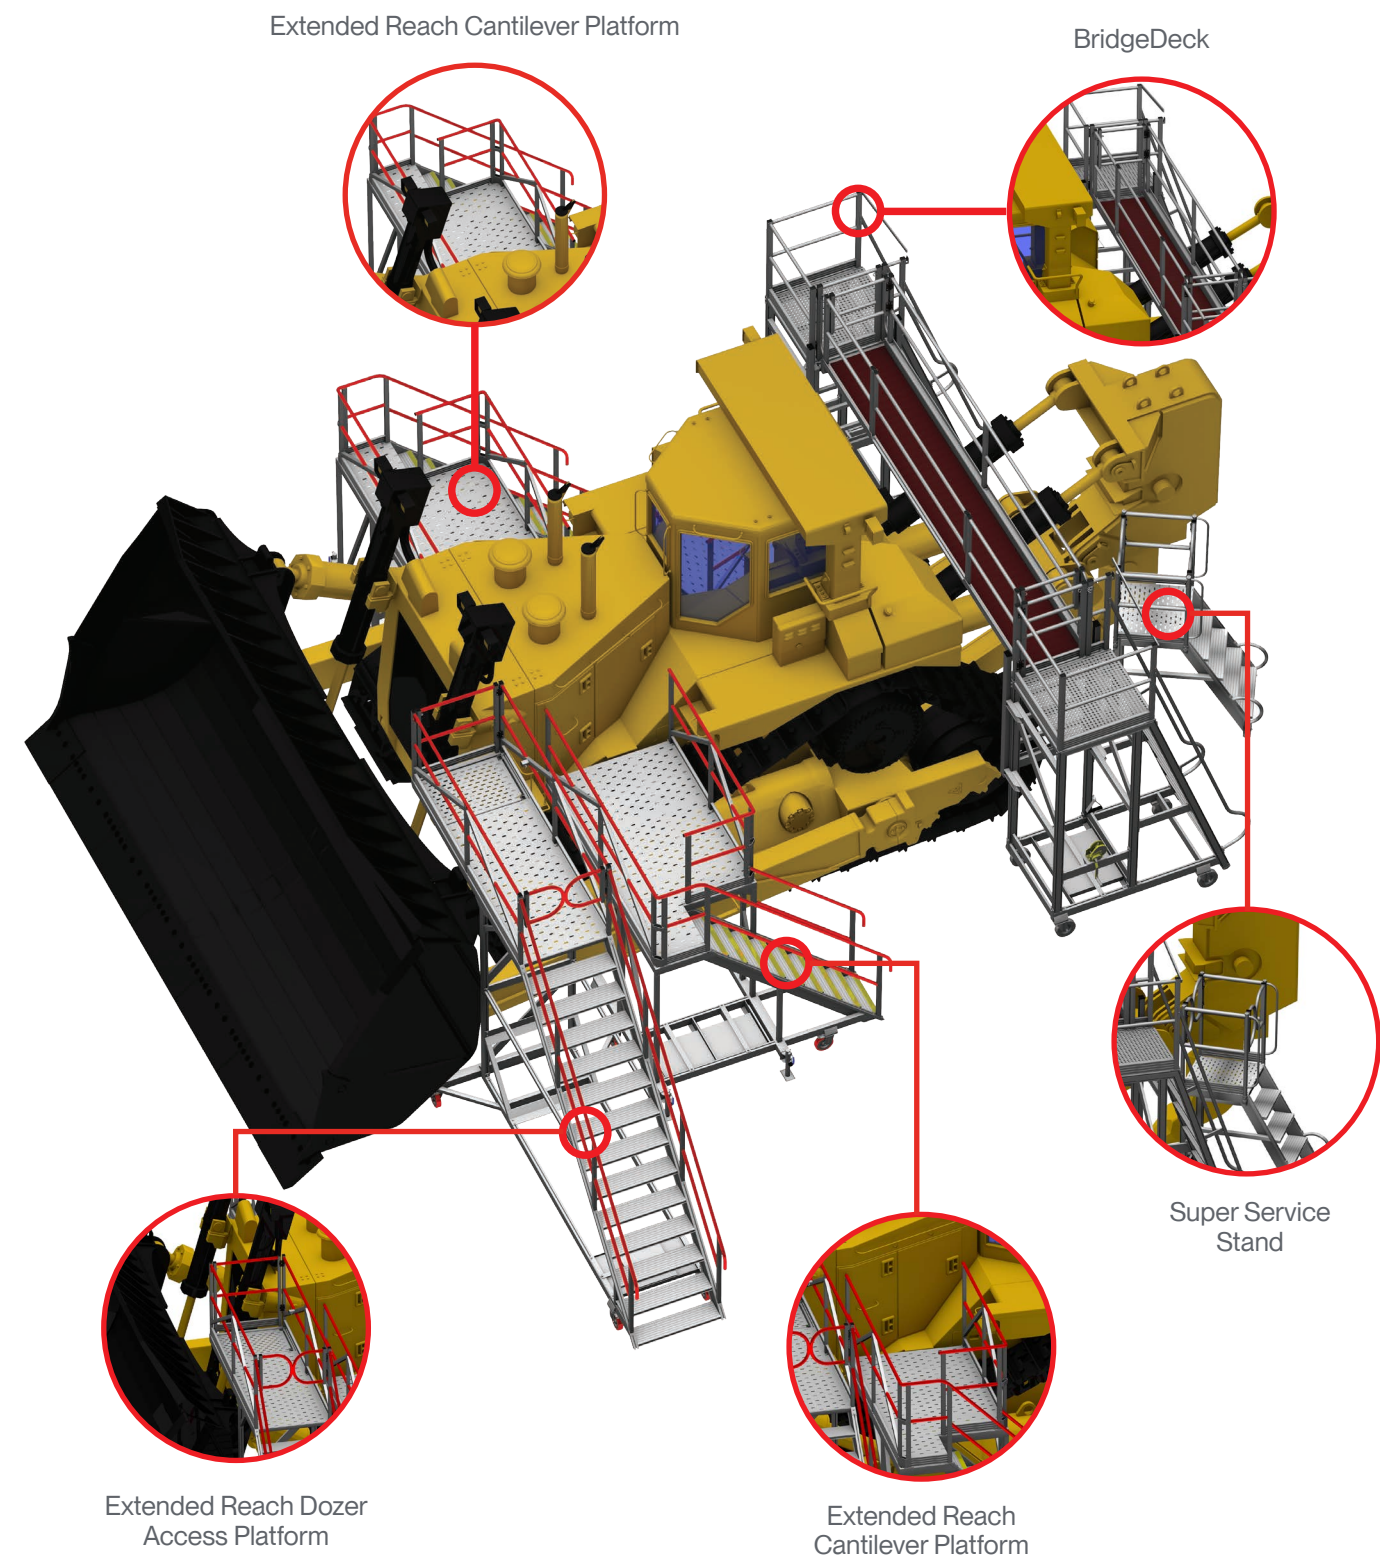

02 Open Cut

Extended Side Cantilever Stand

- Heavy-duty construction ideal for mining workshops.
- Fully engineered with counterweights.
- Manufactured as a LH or RH unit.
- Adjustable jacks for on-site stability.
- Allows access over the push arm and tracks right up to the engine bay door.

225kg
WLL

Suits CAT D11 &
Komatsu D475




02 Open Cut D10/D11 Dozer End Cantilever Stand

- High-tensile box-section aluminium frame - built for tough mining environments.
- Cantilevered platform designed for servicing the engine bay.
- Custom made to suit all machine makes and models.
- 45° stair access allows users to safely carry tools onto the platform.
- Fold-out edge protection provides full fall restraint.

300kg
WLL



Self-closing Batwing Gates

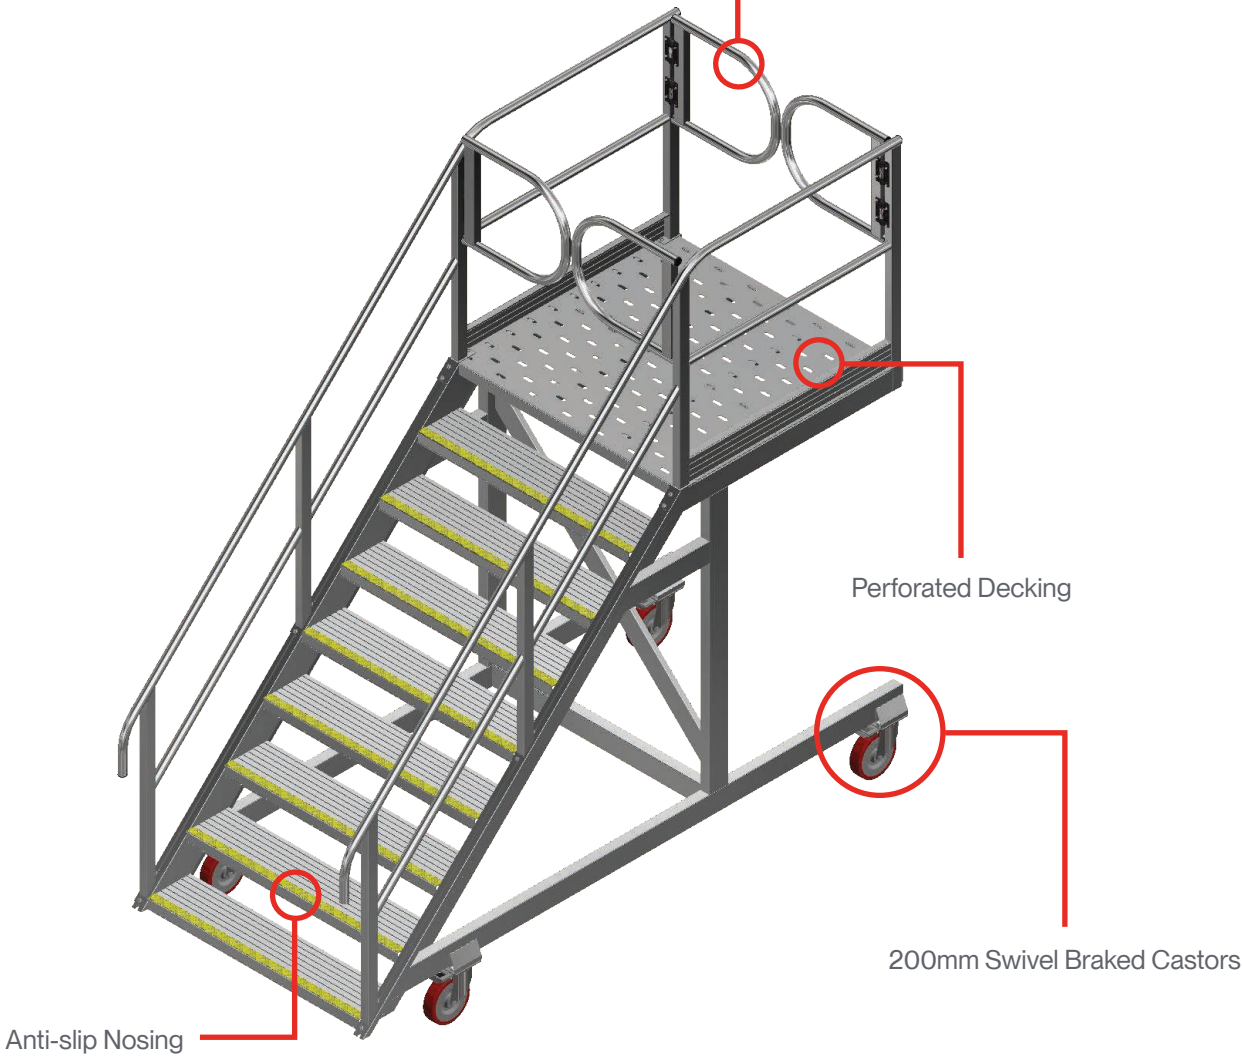

02 Open Cut D10/D11 Side Cantilever Stand


- Provides access over the push arm to the track.
- LH and RH combinations available.
- Access stair positioned at 90° to the platform for a more compact design.
- Fold-out edge protection wings available as an option.
- Fork tyne pockets also available for easy handling.
- Platform also available positioned adjacent to the stairs.

225kg
WLL

Suits Komatsu
Dozers




Optional Extra -
Swing Gate Entry

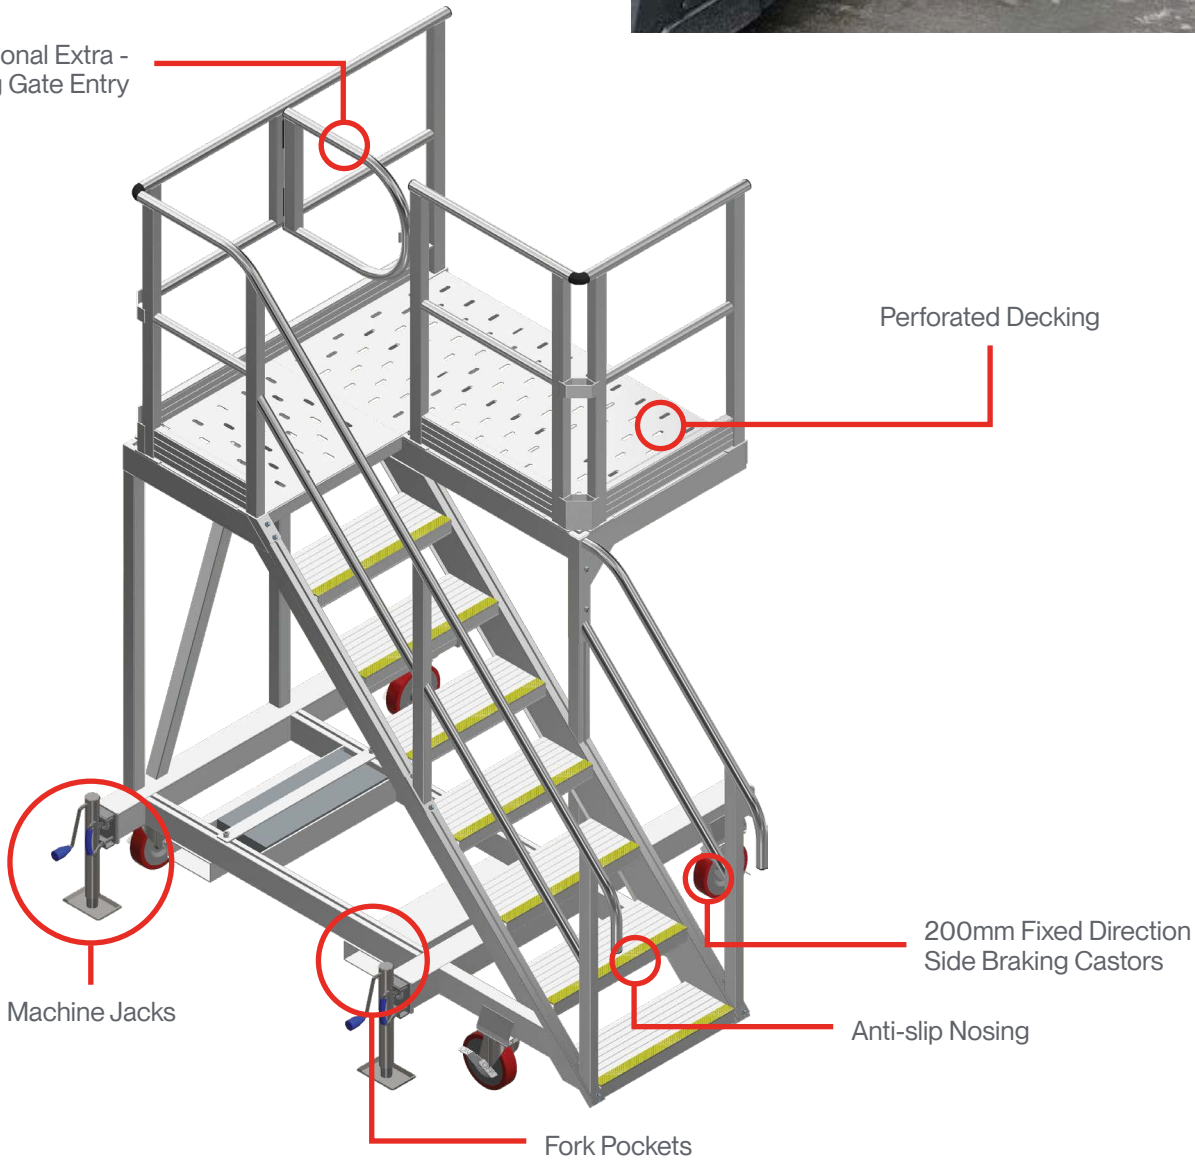

02 Open Cut

D10/D11 Dozer Track Mounted Guardrail

- Lightweight handrails easily break down into smaller components for convenient assembly in the field or workshop.
- Guardrail frames clamp to the sides of the dozer track using simple hand-winding clamps.
- Each frame is split into two separate 1.0 m L sections that interlock, creating a 2.0mL × 1.0mH frame with 0.5m folding wings at the ends to close off access.
- Integrates with dozer track mats to provide a complete access and edge protection solution.

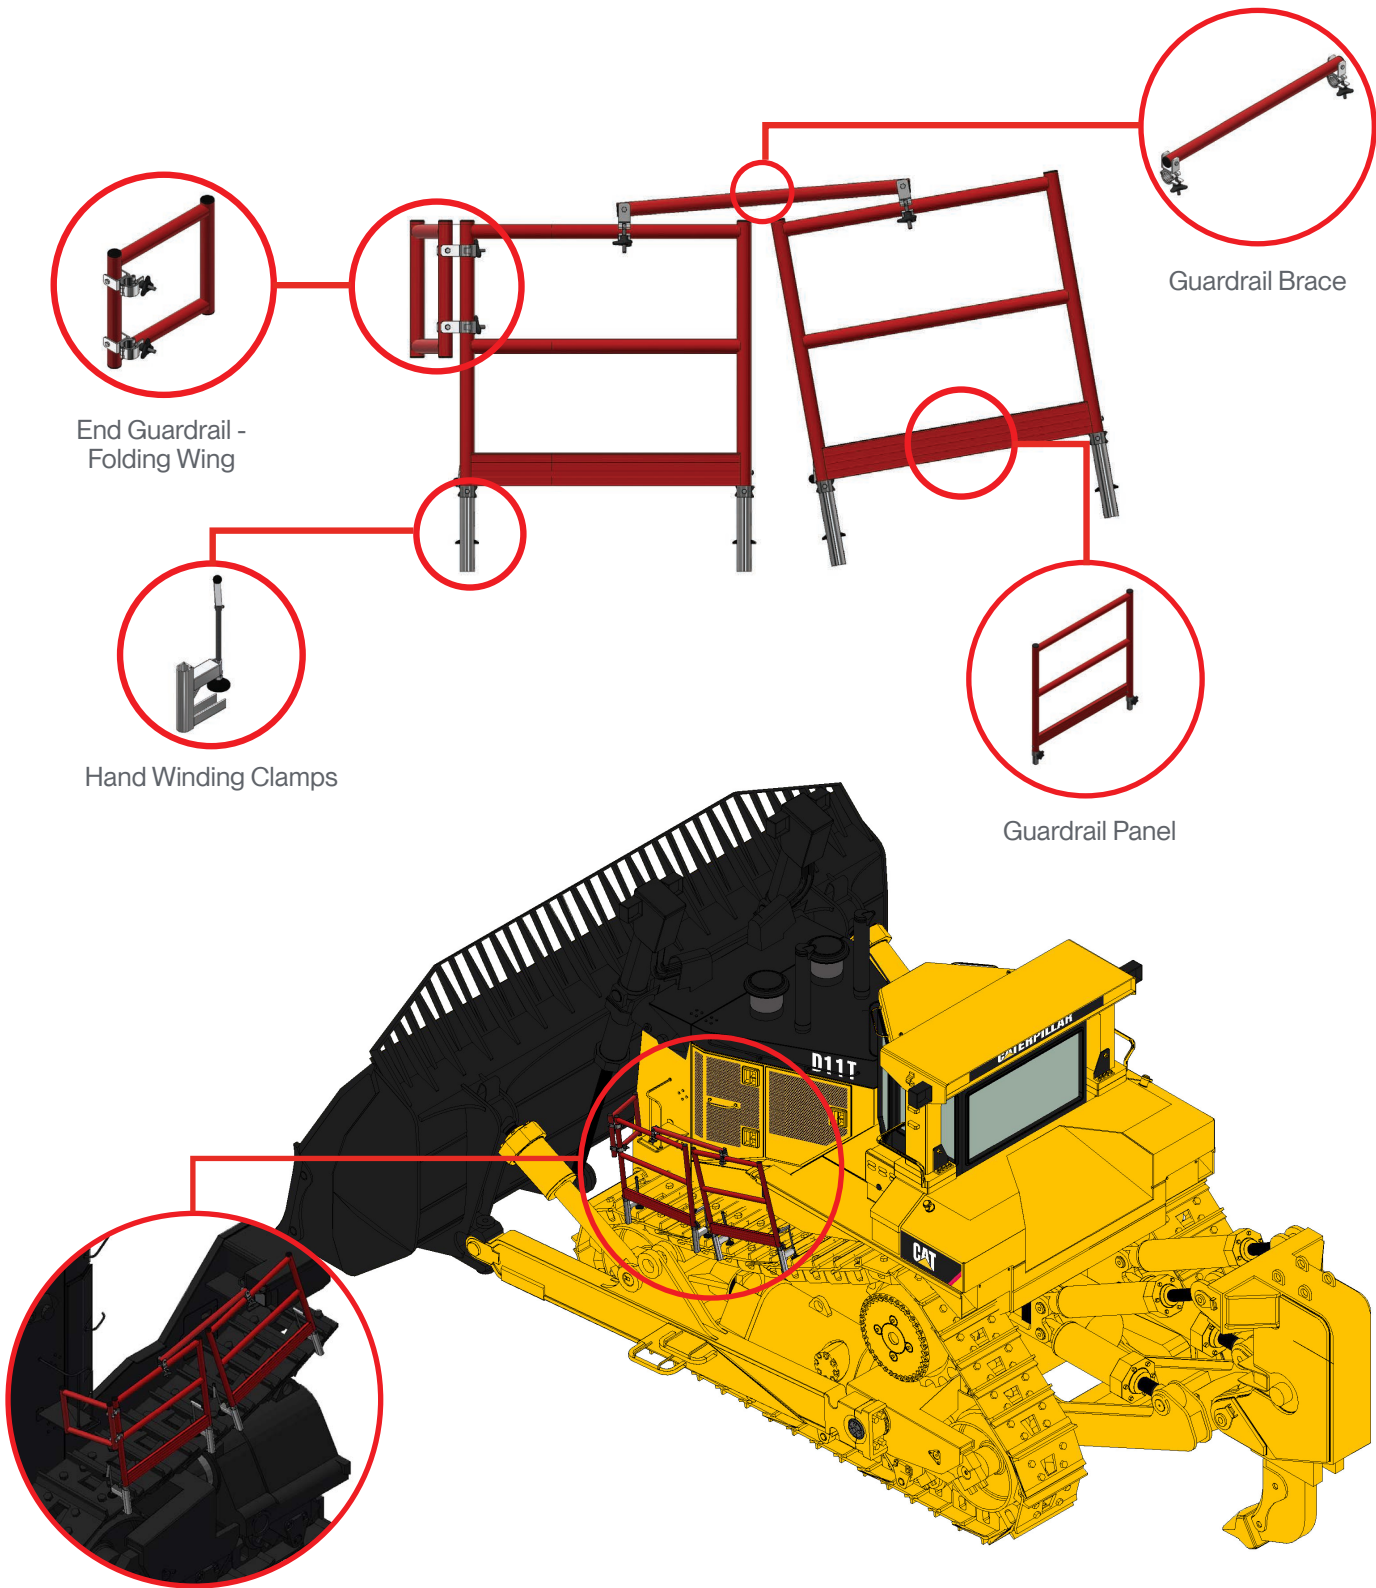


02 Open Cut

Grader Access Platform

- Provides full access over the tyre directly to the engine bay doors.
- 1mL clear cantilever for unobstructed access.
- Self-closing swing gates for safe entry and exit from the platform.
- Raised, swaged, perforated decking promotes drainage and enhances safety.
- Fully customisable to fit a variety of grader types.

225kg
WLL

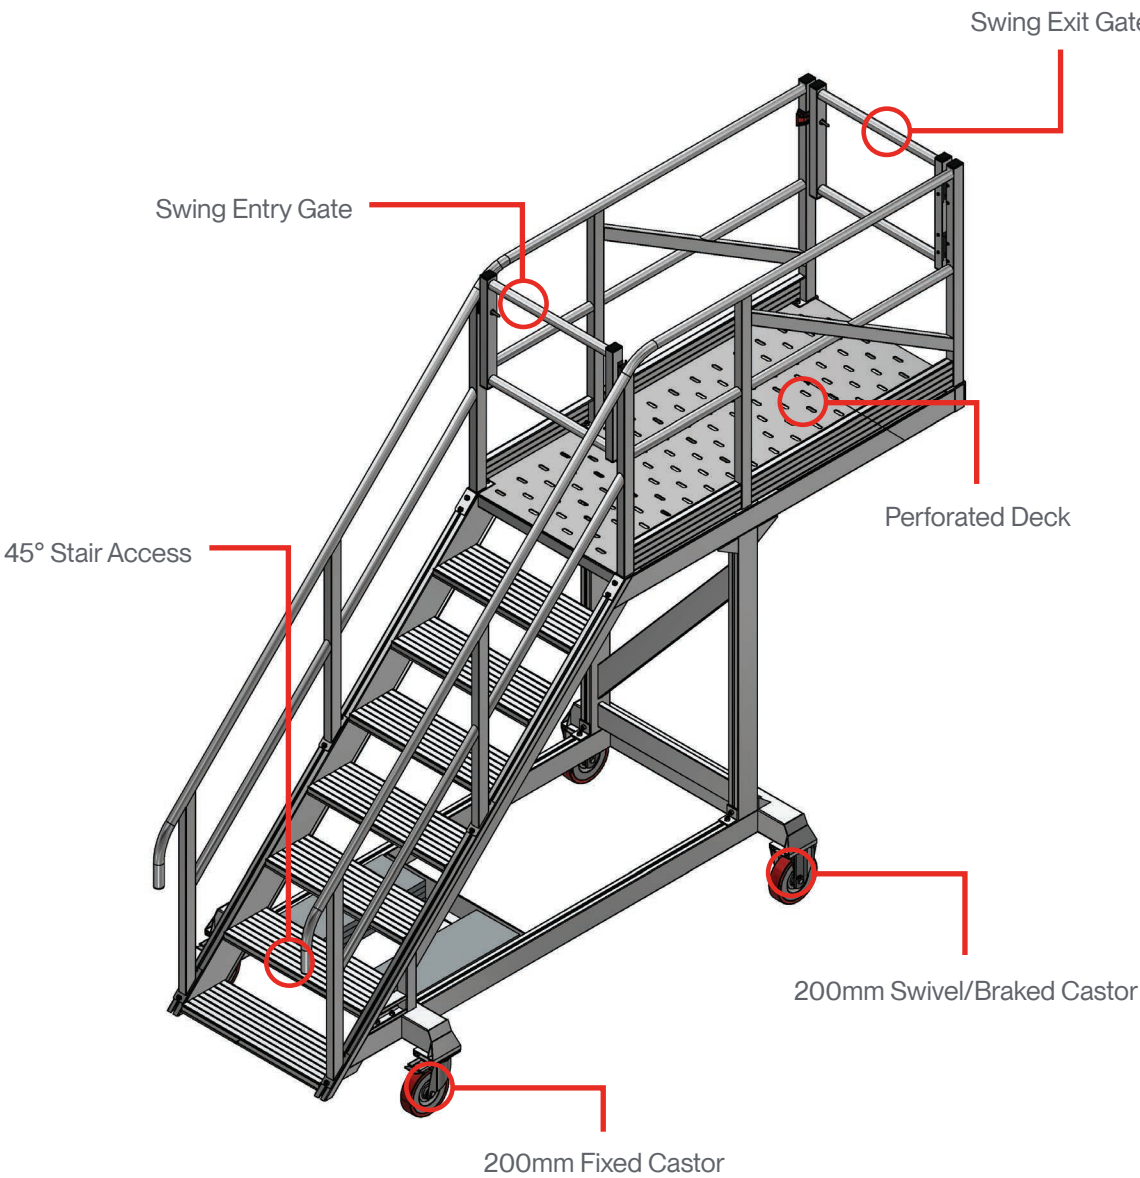


02 Open Cut Tilt Cylinder Access

- Platform dimensions: 2.4mL x 1.0mW x 3.1mH (length includes a 1.5mL clear cantilever).
- Guardrail, midrail, and toeboard frames on each side, with a swing gate at the cantilever end.
- Step-ladder access at a 70° slope, featuring 100mm wide steps with anti-skid nosings.
- Counterweights included for enhanced stability.
- Reflective hazard tape included for increased safety visibility.

150kg
WLL


45° Options
Available

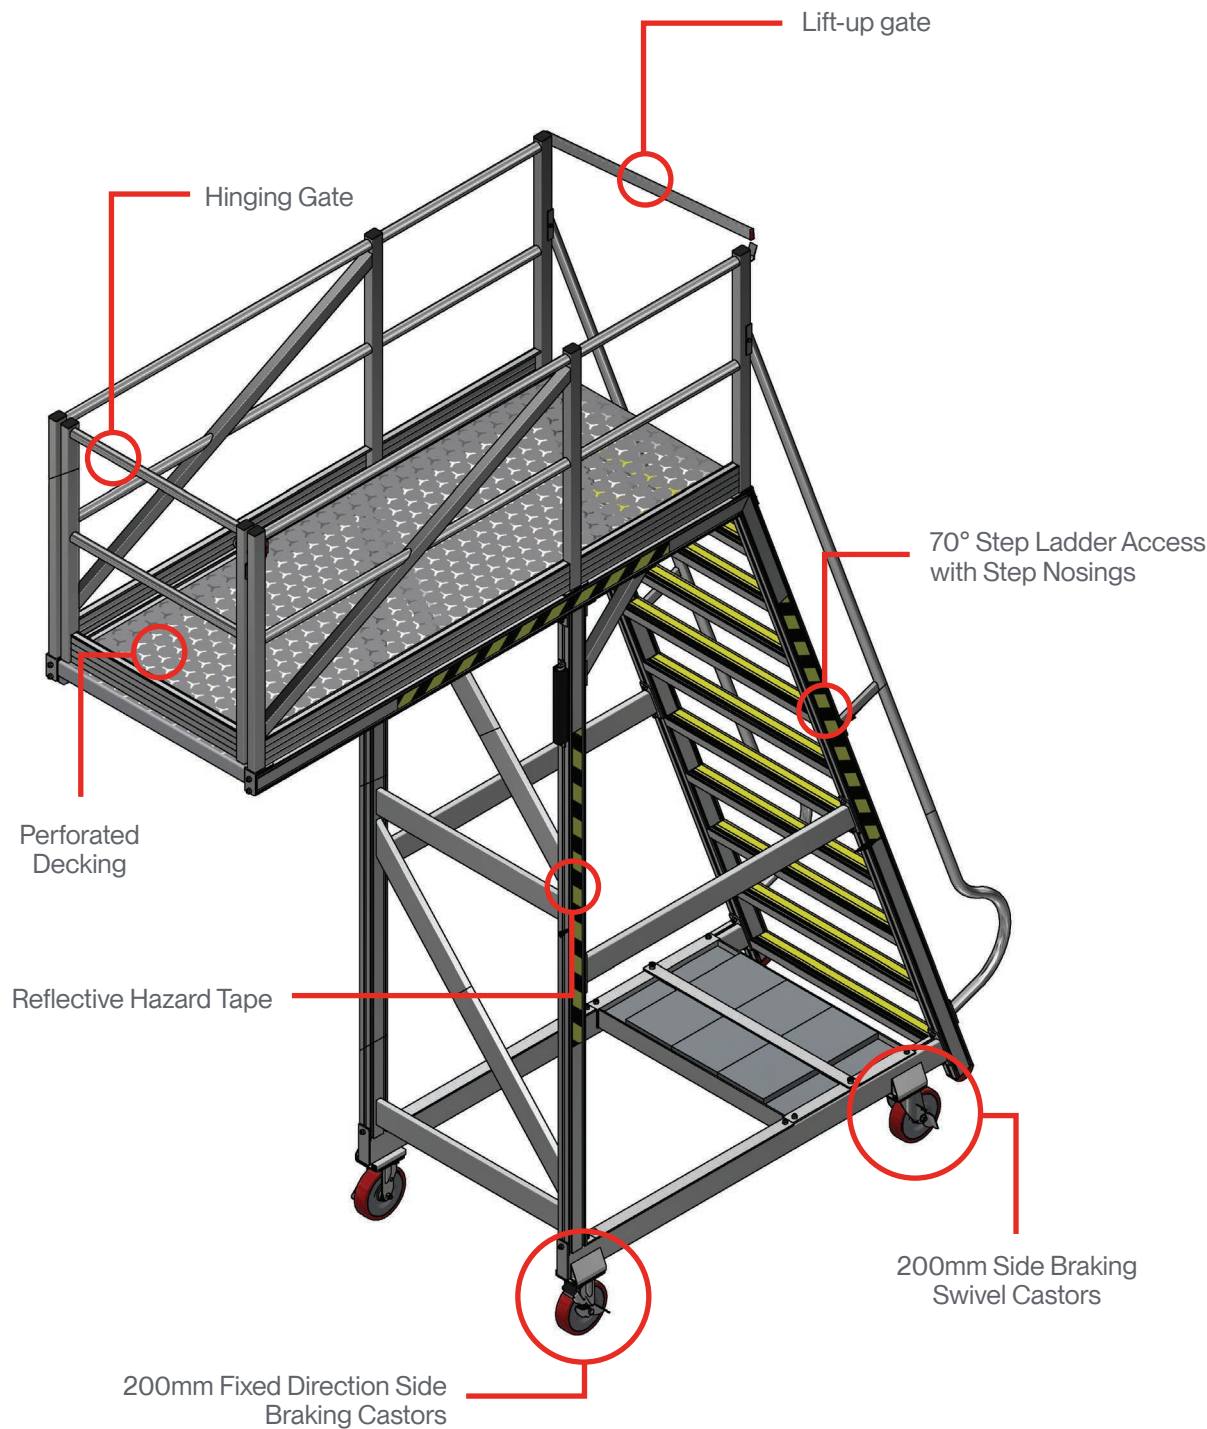

02 Open Cut Boom Hose Access Platform

- Platform dimensions: 2.7mL x 0.95mW x 0.8mH (length includes a 0.7mL x 0.4mW curved cantilever section).
- Spigot-mounted, removable guardrail, midrail, and toeboard frames on all sides.
- Leading edge features seven 0.7 m wide removable sections, conveniently stored on hooks welded to the subframe when not in use.


500kg
WLL

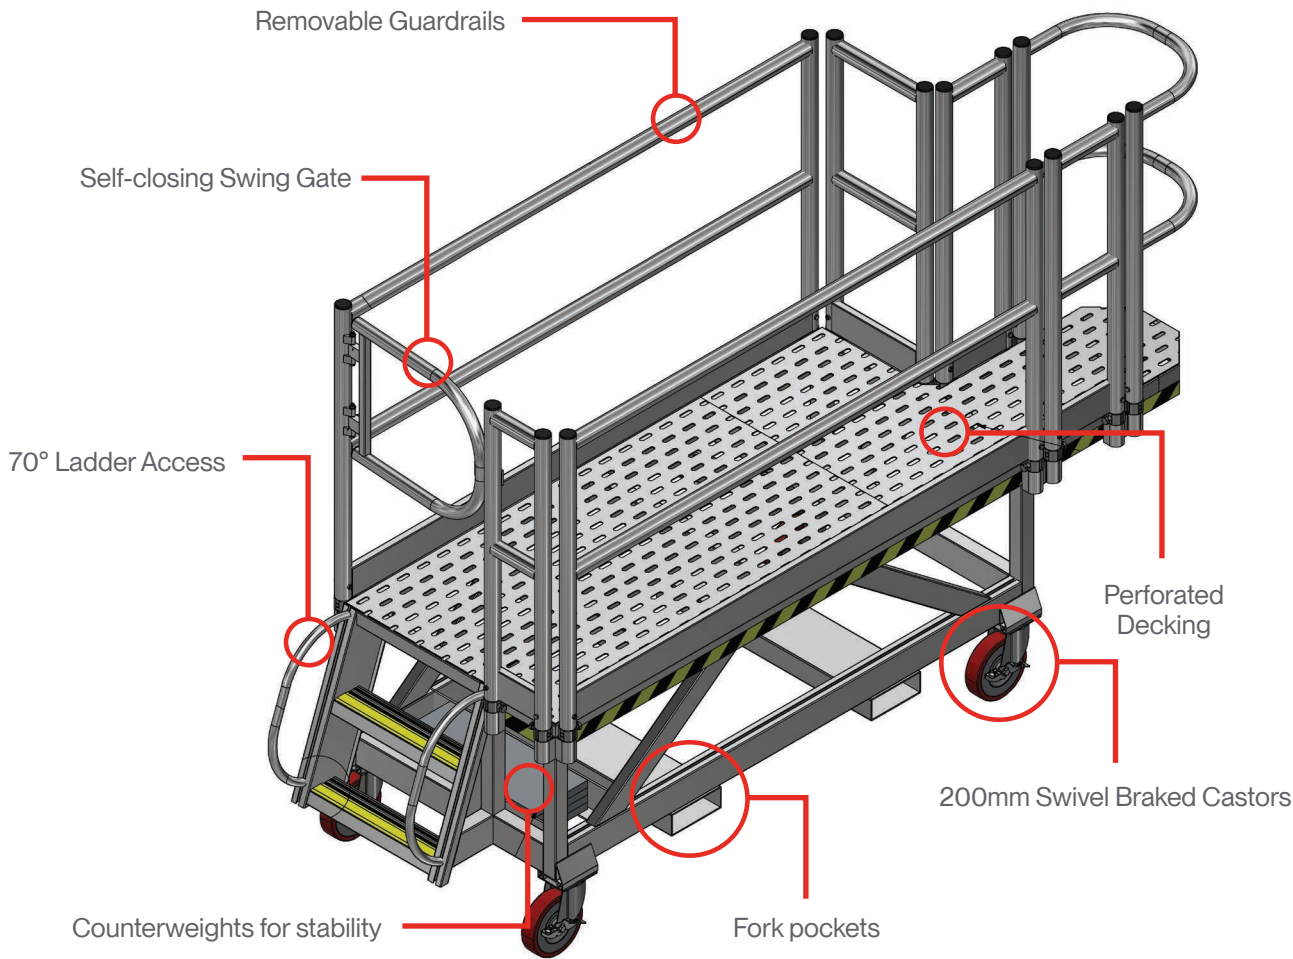

02 Open Cut Strut Access Platform

- Platform dimensions: 2.4mL x 0.95mW x 1.1mH (length includes a 0.4mW x 0.5mL supported cantilever section).
- Step-ladder access at a 70° slope, with 100mm wide steps featuring anti-skid nosings.
- Grabrails on each side, with a swing gate at the entry point.
- Spigot-mounted, removable guardrail frames on all sides


500kg
WLL

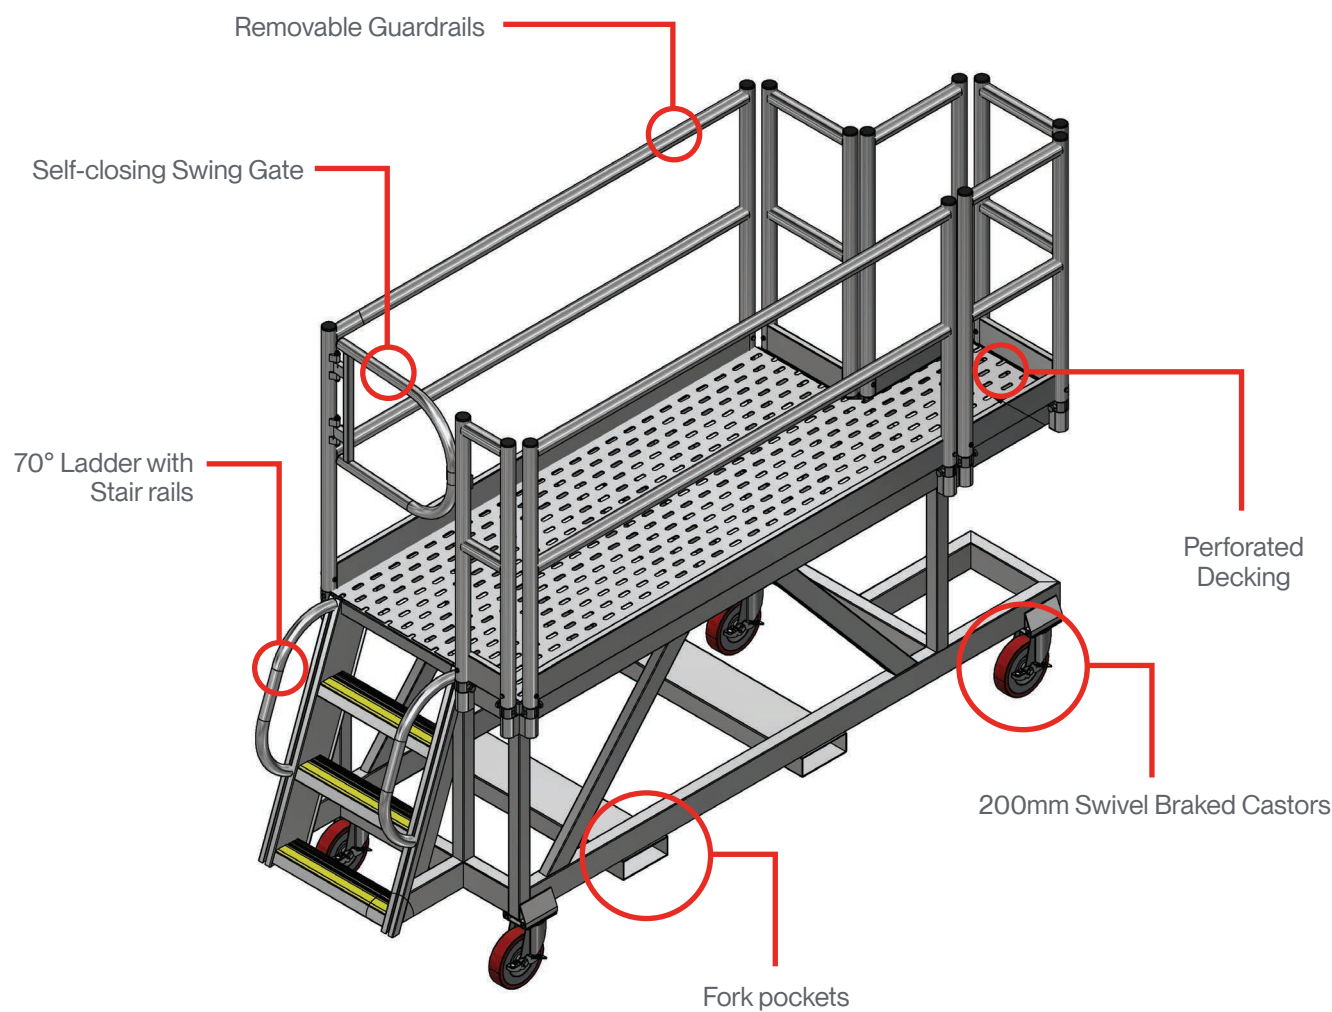

02 Open Cut Bucket Access Platform

- Platform dimensions: 4.9mL x 2.3mW x 1.2mH (width includes a 0.8mL clear cantilever to the RHS).
- Spigot-mounted, removable guardrail, midrail, and toeboard frames on all sides. Leading edge includes seven 0.7m wide removable sections.
- 1.4mW stairway at a 45° slope, with griptread extrusion steps featuring anti-skid nosings.
- Perforated and swaged material for drainage and safety.

500kg
WLL

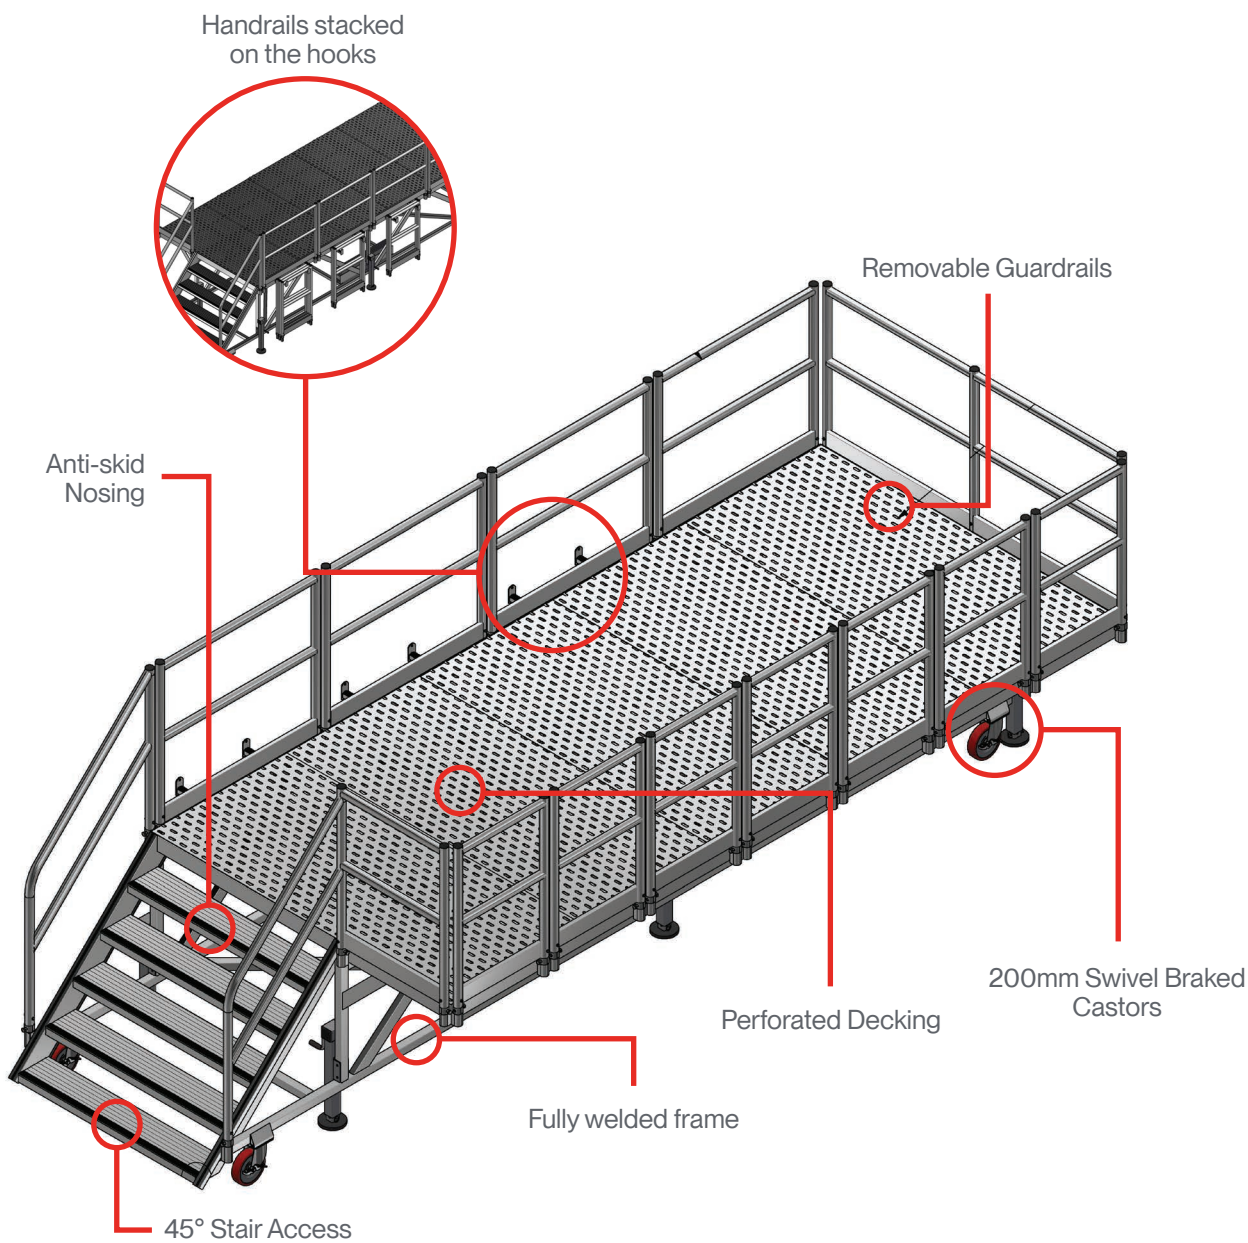



INDUSTRY STORY

BHP - Bowen Basin Workshop

The Challenge

BHP’s mining workshops in Queensland’s Bowen Basin relied heavily on traditional scaffolding for maintenance—an approach that was slow, labour-intensive, and costly. The scaffolding process required large crews to assemble and dismantle structures for each task, causing delays, high labour costs, and storage challenges, all while working in a high-risk, efficiency-driven mining environment.

The Solution

To improve efficiency and reduce dependence on scaffolding, BHP engaged SafeSmart to conduct a detailed scaffolding reduction audit. Based on this, they introduced lightweight, mobile trailer-mounted access platforms constructed from high-strength aluminium. These platforms are height-adjustable, easy to move, and versatile enough to service a wide range of heavy machinery, allowing mechanics to operate independently without waiting on scaffold crews. SafeSmart also provided comprehensive training and ongoing maintenance support to ensure seamless adoption and sustained performance of the new system.



The Result

By replacing traditional scaffolding with mobile access platforms, BHP significantly reduced setup times from over three hours to mere minutes, cutting labour costs and eliminating delays. The new system enhanced safety by minimising the need for scaffold crews and streamlined maintenance workflows, allowing workshop teams to focus more on their core tasks. Today, scaffolding is reserved for large shutdowns and capital projects, while mobile platforms handle daily maintenance—resulting in improved operational efficiency, lower costs, and a safer working environment. This transformation has positioned BHP as a leader in smart mining maintenance solutions.



Section 03 Underground Solutions

Loader Access

Loader Access Platform	64
Loader Access Platform - Rear	65
Accumulator Access LH & RH	66
Tray Access Platform	67
Loader Tilt Cylinder Platform	68
Multi-Purpose Height Adjustable Mining Platform	69



Scaffolding Solutions	70
-----------------------	----

A Better Way

03 Underground Loader Access Platform

- Compact design for underground workshops, with end platforms nesting inside the side platform frame for easy storage.
- Side platforms wrap around the front wheels of the loader.
- End platforms fit neatly under the bucket when raised.

225kg
WLL



Swing Gates

Adjustable Guardrail at one end with D-pins to lock in place

Quick Release Straps

Side Platform

End Platforms (Joined)

Platforms Stored

03 Underground Loader Access Platform - Rear

- Configurable platforms to suit different machines — simply add platform segments to adapt to various types of equipment.
- Provides a full wrap-around solution at the rear of the loader.
- Ideal for heavy maintenance tasks.

225kg
WLL

Loader Platform
- Sandvik 621
configuration

Loader Platform
- Sandvik 517
configuration

Loader Platform
- CAT R3000H
configuration

Side Platform
segment

Stair access
module




03 Underground Accumulator Access LH & RH

- Platform dimensions: 3.85mL x 1.0mW x 2.2mH (length includes a 1.2mL cantilever).
- Base rails are set back slightly to create a 0.5m clear cantilever section.
- LH & RH access platforms are designed to form a bridge configuration; platforms can also be used as standalone units.
- Stairway access at a 45° slope, with griptread extrusion steps and anti-skid nosings, and handrail and midrail on each side.
- Perforated and swaged decking material for safety and drainage.

225kg

WLL

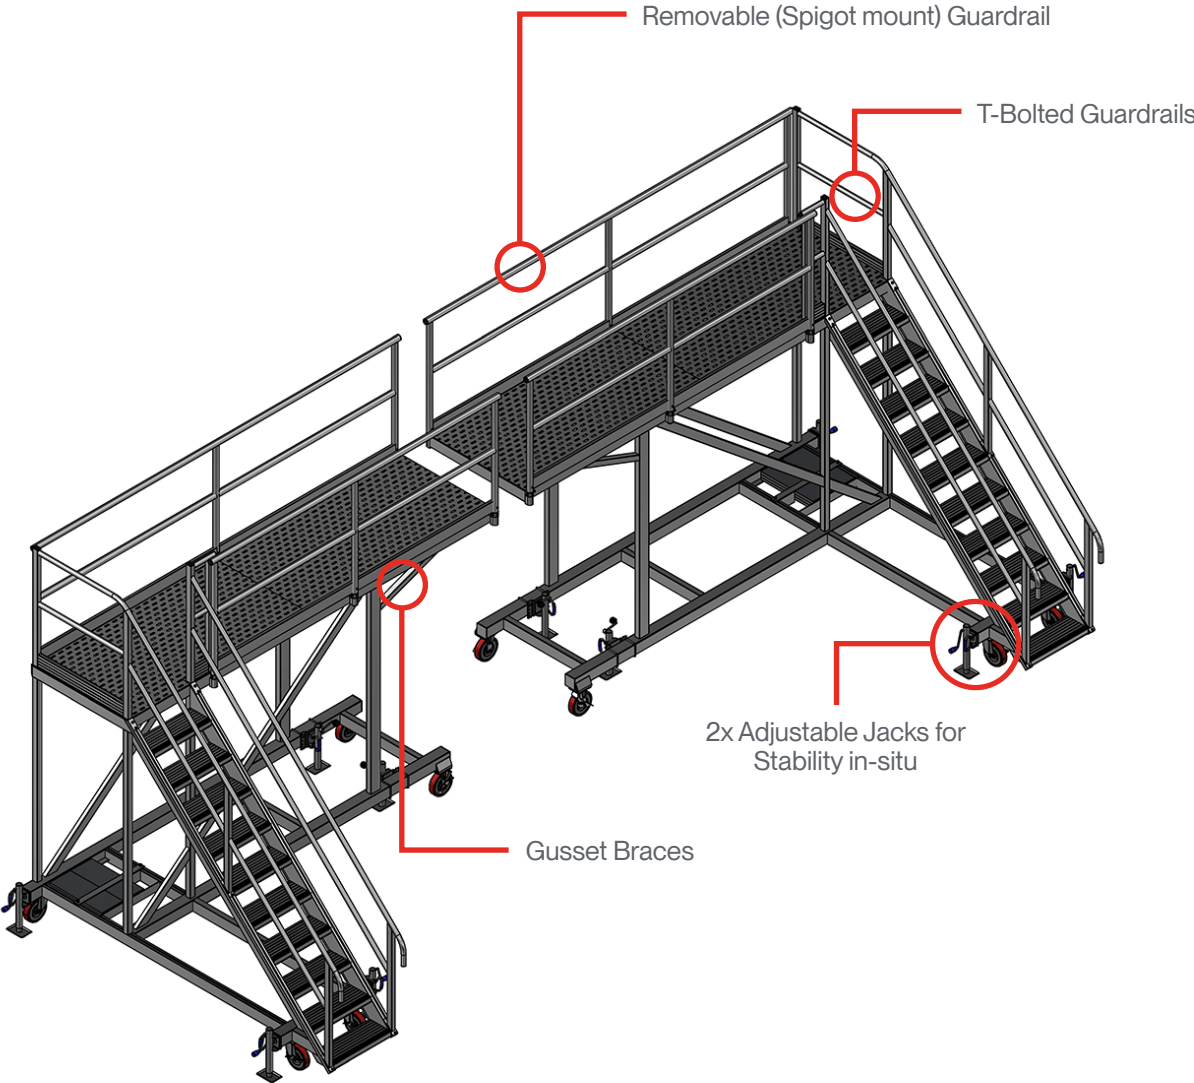


03 Underground Tray Access Platform

- Platform dimensions; 3.1mL x 2.1mW x 2.5mH (length includes a 375mm supported cantilever to the leading edge).
- Parallel stairway access at a 45° slope, with griptread extrusion steps featuring anti-skid nosings.
- Guardrail, midrail, and toeboard frames on all sides, with 1.54m hinging wings on the leading edge.
- Perforated and swaged decking material for drainage and safety.

225kg

WLL

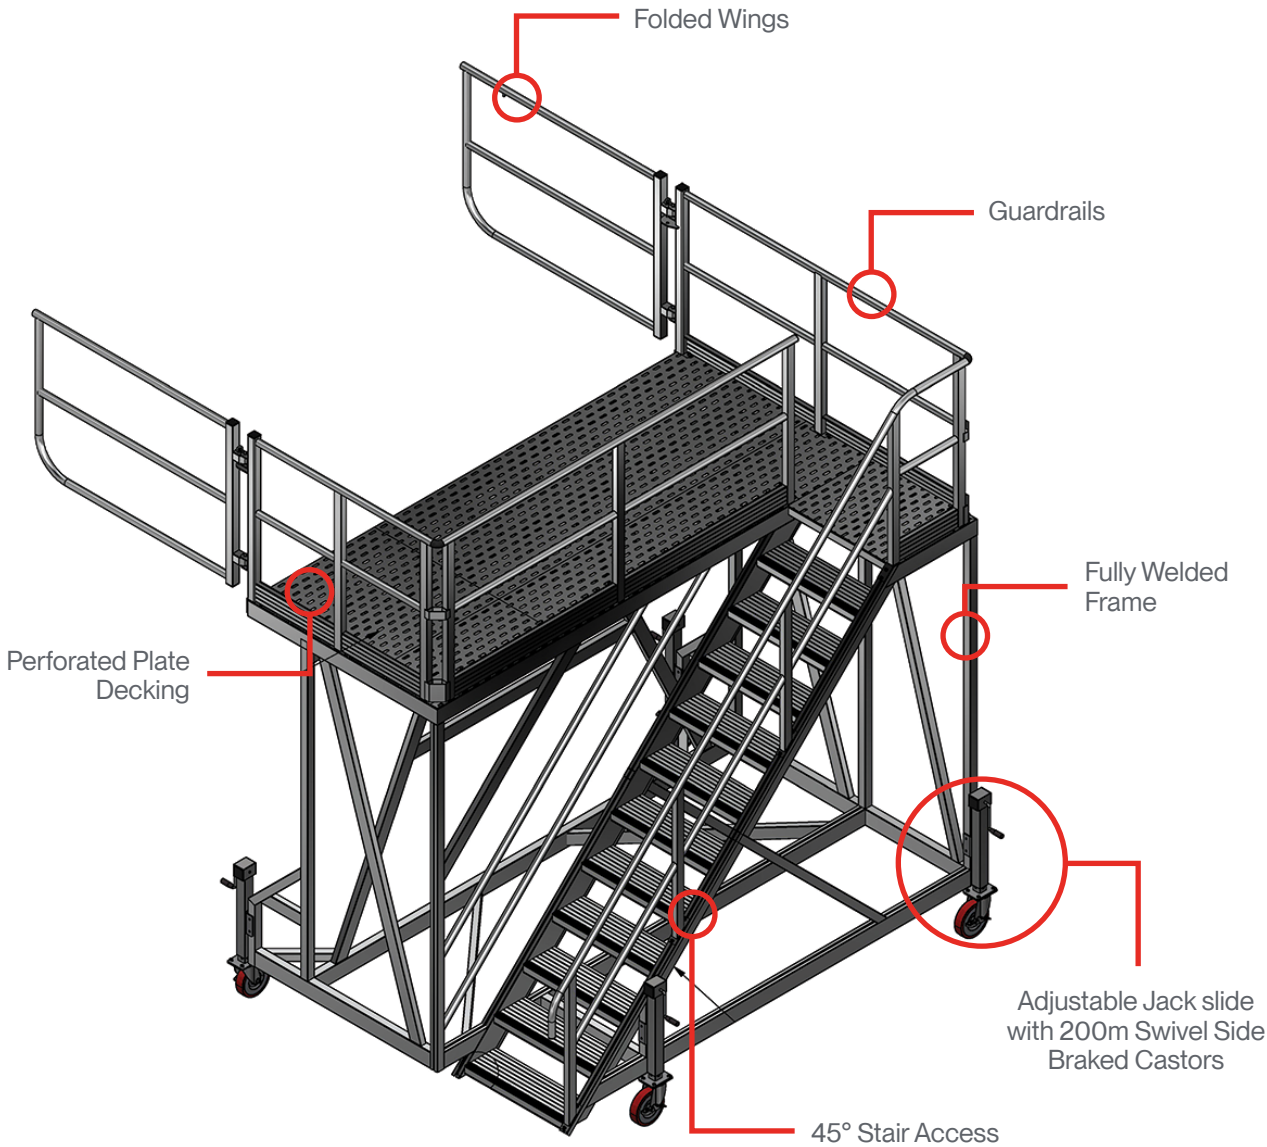

03 Underground Loader Tilt Cylinder Platform

- Platform dimensions: 3mL x 1.7mW x 3.4mH
- U-shaped design fits over the wheel without interference.
- 45° stair access allows safe transport of tools and materials up and down.
- Quick-release handrails at the front provide easy access to the work area.
- Self-draining, slip-resistant perforated aluminium decking.
- Constructed from marine-grade aluminium for long-lasting durability.
- Can be crane lifted or forklifted around site for easy relocation.


225kg
WLL



03 Underground Multi-Purpose Height-Adjustable Mining Platform

- Platform dimensions: 2.3mL x 1.2mW
- Constructed from high-tensile, T6 marine-grade box-section aluminium for ultimate strength and durability.
- Height adjustable via manual winch, ranging from 2.3mH - 3.5mH
- 636mm cantilever overhang for close proximity to the work area.
- Large, safe work area with a self-closing gate providing full surround protection.
- Wind-down jacks for stability and levelling.
- Lifting lugs and fork sleeves for easy on-site mobility.

225kg
WLL

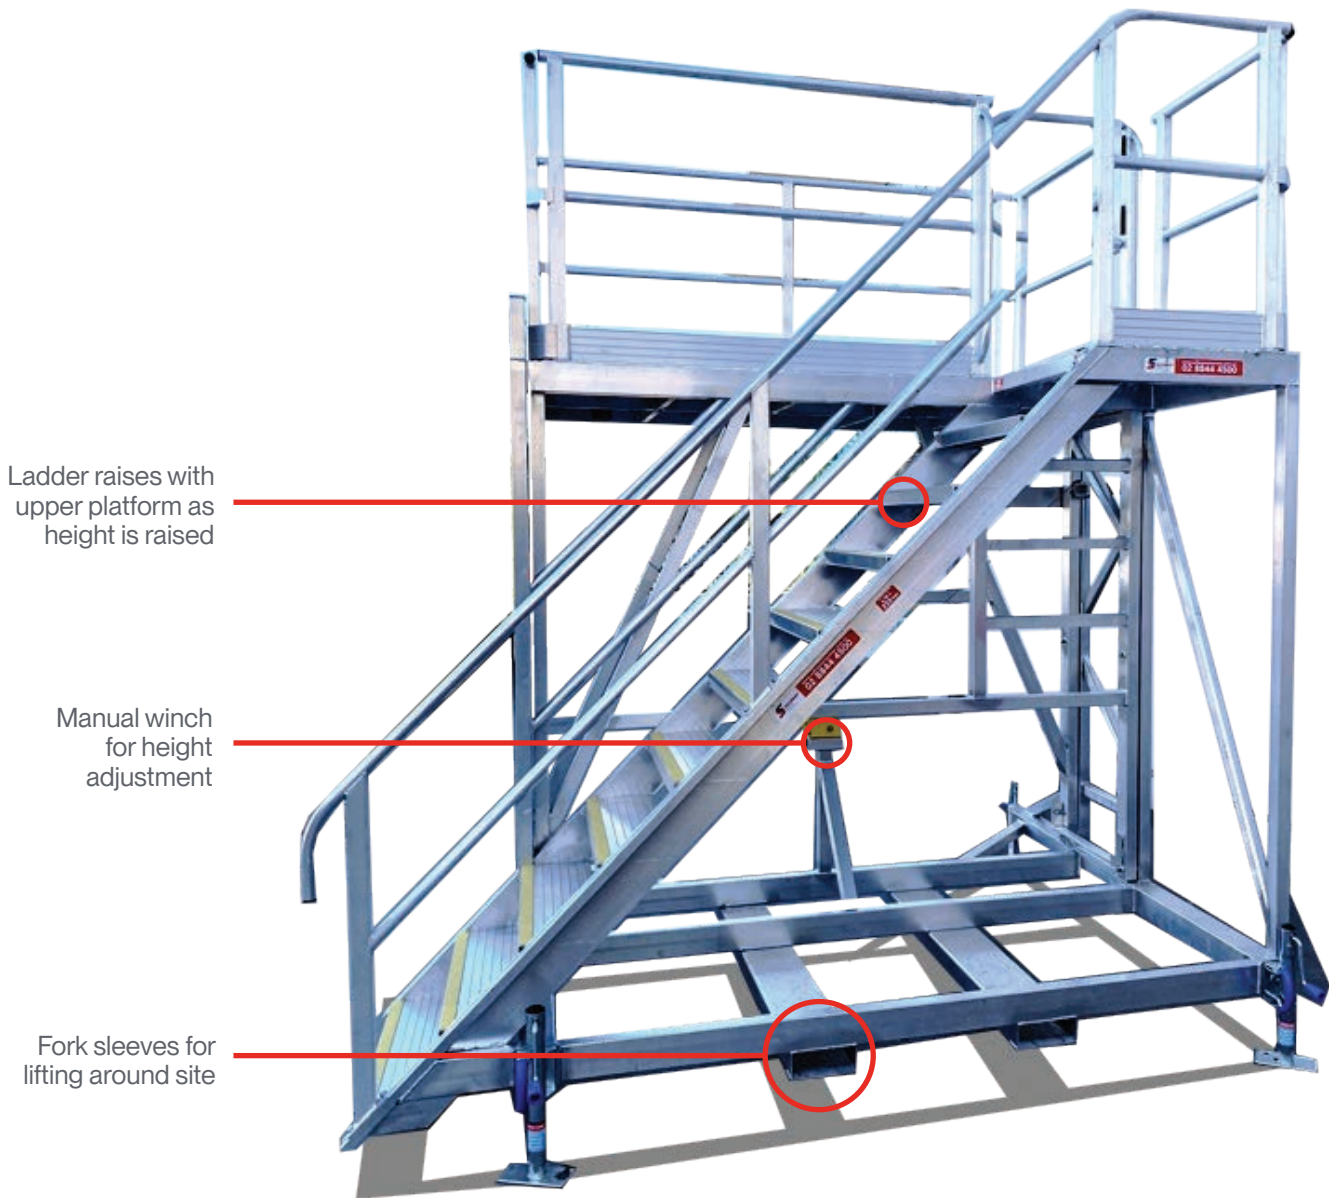

04 Proscaf

The ProScaf Advantage - A Better Way

ProScaf: Do more with Less. The ring system delivers ultimate flexibility, designed to maximise build efficiency while minimising personnel requirements.

The unconventional becomes conventional: The unique load bearing properties of ProScaf components make it ideal for projects that involving:

- Cantilevered/spurring structures
- Craneable structures
- Heavy-duty loading/propping
- Public access ramps and stairs
- Facade access

Build with Confidence


The system's highly engineered properties, combined with extensive technical data, make the design and construction of complex structures simpler and more efficient.

Extensive QA Processes

Batch testing and stamping of every component help operational teams verify and track any ProScaf equipment they own. ProScaf fully complies with **BS EN 12811-1** and is manufactured through our BS EN ISO 9001-certified production facility.

Expand your options
The ProScaf range includes:

- Components for public access structures such as stairs, ramps, and viewing platforms
- SwiftStage staging system.
- ProScaf Aluminium system range.
- SmartBridge bridging system.
- SmartRoof roofing/encapsulation system.

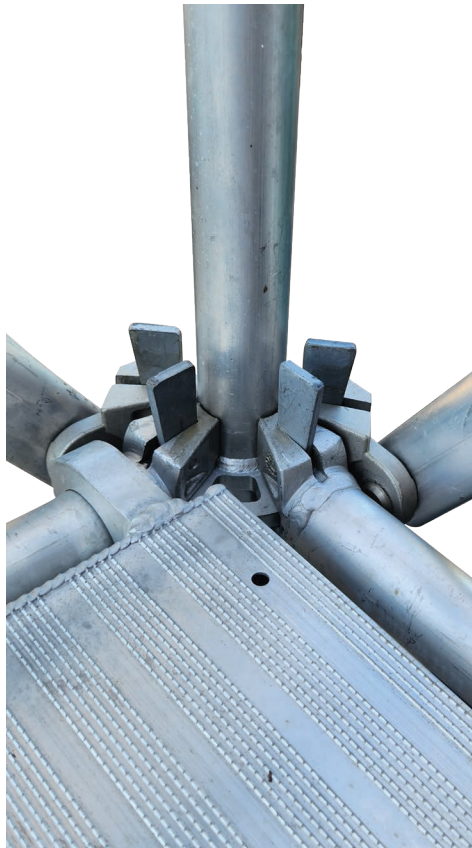

04 Proscaf

Streamline Expenditure, with a ProScaf Partnership

SafeSmart partnered with a major food processing company in Queensland, operating across seven industrial sites with infrastructure over 120 years old. The complexity and age of the facilities required ongoing maintenance and frequent capital upgrade projects, often needing scaffolding.


Traditionally, the company hired scaffolding through contractors, which involved variable costs and frequent misalignments between the project scope and contractor quotes. This often resulted in project delays and unexpected expenses that strained budgets.



To address this, SafeSmart introduced Proscaf—a modular scaffolding system the client could purchase rather than hire. SafeSmart's design team collaborated closely with the client to develop scaffold designs and build methodologies with fixed costs for materials, providing budget certainty regardless of project duration.

By investing in ProScaf materials upfront, the client transformed scaffolding into a reusable asset, reducing dependence on hired equipment. Scaffold contractors were retained solely for installation and dismantling labor, simplifying operations and avoiding the need for stock commitments.

Following the success of the initial project, SafeSmart has continued to support the client with design, material supply, and scaffolding solutions across all seven sites. Over four years, the client's investment in ProScaf has significantly reduced scaffolding expenses to less than 20% of previous costs, delivering long-term cost savings and improved project efficiency.

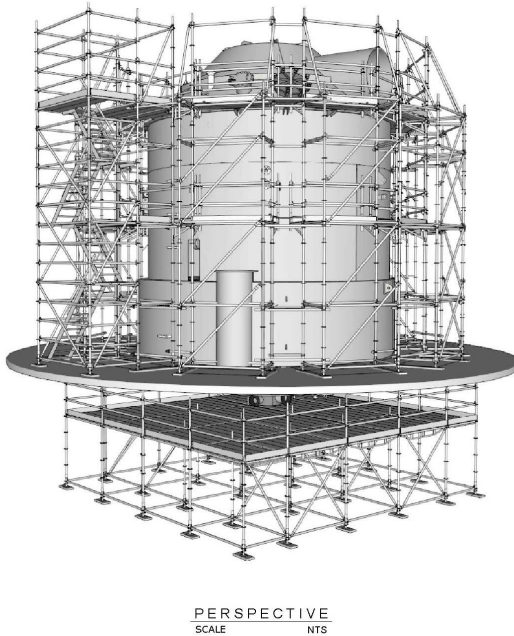

Terms & Conditions

1. Copyright SafeSmart 2026. ABN 20 024 050 645 - No part of this publication maybe reproduced without the written permission of SafeSmart.
2. SafeSmart has made every effort to portray accurate descriptions and information within this catalogue. No liability is accepted in the event of errors or omissions.
3. Where specifications are provided they are intended as a guide only. Please enquire from our staff for full details of product at time of enquiry.
4. Products may be deleted, amended, substituted or changed at the sole discretion of SafeSmart.
5. The customer/user must establish the suitability of the product purchased for their own safe use.
6. Trade Marks. Where any registered trade mark has been used it is with recognition of the owner's right.
7. Any measurements shown are intended as a guide only. Please confirm any critical measurement with SafeSmart.
8. Compliance to standards may be in part or whole subject to the nature of the product.



A Better Way

UK 0845 382 1000

sales@safesmartaccess.co.uk

Unit C9, Codham Hall, J29 M25/A127, Brentwood, CM13 3JT

Other Locations

AUSTRALIA

02 8844 4500

NEW ZEALAND

0800 000 448

UNITED STATES

310 410 1525

CANADA

1-866 635 8818